INSPIRATION
LIGHTING

4

FLUA S. R. L.
BASTIONI DI PORTA VOLTA 7,
MILANO, ITALY CAP 20121
TEL: +39-3927778888
FAX: +39-0236728301
E-MAIL: INFO@FLUA.COM
WWW.FLUA.COM

2019

FLUA®

INSPIRATION
LIGHTING

FLUA®

PERFORM YOUR LIGHT

PERFORM YOUR LIGHT

WWW.FLUA.COM

FLUA.S.R.L



We are FLUA.

The challenging art of minimalism, where every tiny detail is accounted for, inspired us to create our new product line with unprecedented aesthetic value and, at the same time, profound functionality.Our international design team is working fanatically to develop our product range with best light performance focusing on each element from the whole concept to the tiniest detail.


FLUA's products range, with more than 1000 selection, can answer all possible lighting demands. Our products are made with care for each detail,designed to decorate indoor and outdoor spaces, offering best lighting solutions according to modern tendencies. Being a young company, we are focusing on most advanced LED technology, innovative solutions and fashionable design. For a short period of time, FLUA has already conquered the hearts of thousands designers and architects all over the world. From Milan to Singapore, from Dubai to Shanghai we provide best lighting experience and knowledge to meet the functional and aesthetic needs.

R&D




Design and development of FLUA new collections are inspired by new trends in technology and advanced engineering solutions. The lighting industry is constantly changing, and FLUA's professional in-house design bureau in co-operation with leading designers and consultancies, is constantly studying the markets, materials, methods and applications to create the best lighting solutions. Our main principals are efficiency, flexibility, functionality and most advanced technology.

TECHNOLOGY

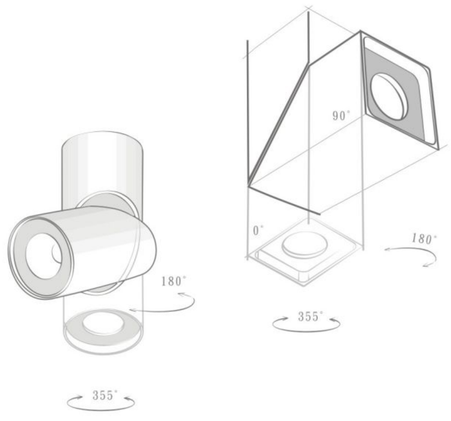


We deeply understand the importance of new technologies both in product development and production management. FLUA has integrated the best and most advanced technologies in IT, production management and logistics to create CRM system to provide additional value added services to our customers and to make our cooperation more efficient and easier.

PRODUCTION

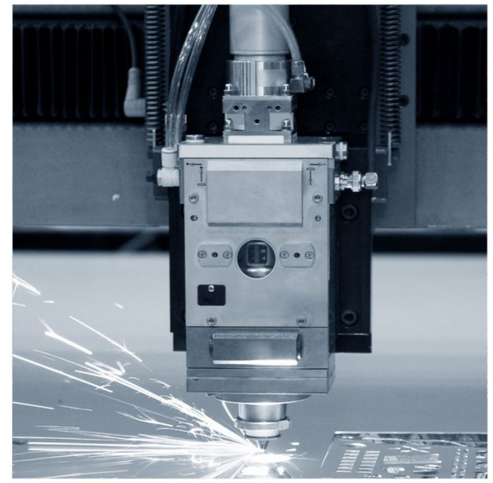

FLUA lighting collection has grown to more than 1000 product references, ranging from indoor eye-catching design solutions and outdoor luminaires. We focus on details, from design and development to each production step.
Our production facilities contain most advanced equipment including aluminum foundry, 3D printing, and an advanced Design / Test laboratory. Finished products undergo strict quality testing.

QUALITY

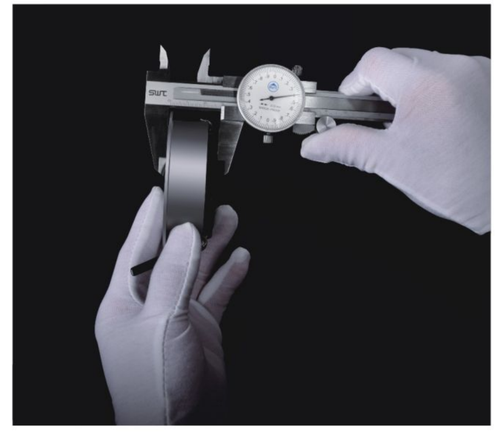


Throughout the production process FLUA has developed strict quality parameters. Each step of production is strictly checked and tested. Careful selection of raw materials and electronic components, highly skilled professionals and innovative solutions are the result of high quality of FLUA luminaries.

APPLICATION

LEBANON VILLA



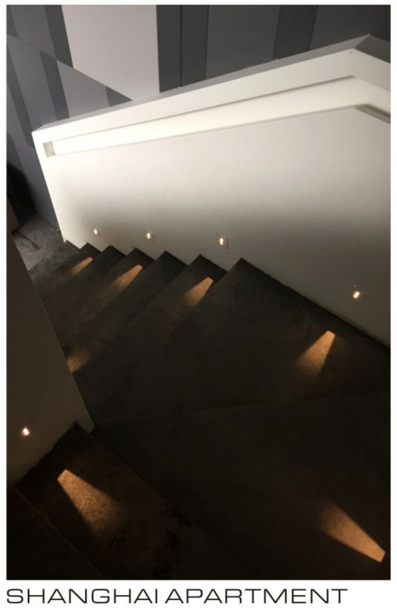

SHANGHAI APARTMENT


XI'AN APARTMENT





SHANGHAI APARTMENT

APPLICATION

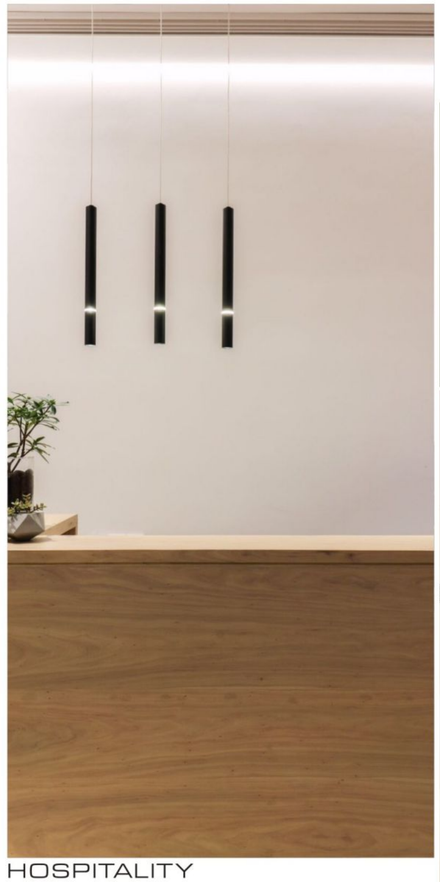

HOSPITALITY

SHANGHAI APARTMENT





ISRAEL VILLA

BUSINESS COOPERATION

MATERIALS AND COMPONENTS

Careful selection of raw-materials and most innovative LED technology solutions in addition to professional craftsmanship and unique design are the keys to the success of our company. FLUA is working in strong long term cooperation with worldwide leading manufacturers of materials and components. Advanced technologies, latest innovative achievements are deeply investigated in strong synergy with our suppliers in order to find the best solutions for our products.





FLUA PARTNERS

FLUA recognizes the value and importance of our Distribution Channels. Our Partners are professional Agents and Distributors co-operating with FLUA on long-term basis.
Companies given Agent and Distributor Partner status obtain certain stipulated business terms and conditions and joint obligations / goals related to overall Sales (turnover) / Brand promotion.
To know more information about Distribution policy or apply for co-operation please contact us by e-mail info@flua.com or fill the application form on our web site www.flua.com





HARI

Composing light in space, adapting to the unique requirements of each environment, creating new atmosphere to each room-all this is about the new collection of floor lamps HARI.

HARI lamp is designed by FLUA design team. The collection combines advanced technology with superior functionality and sophisticated design. The HARI lamp can serve various functional requirements simultaneously, dining room lamp, living room ambient light, reading lamp and for work purposes. Diffuser profile accommodates a line of LEDs, the slim profile bestows a visual refinement while also providing a surprising level of illumination. Thanks to its special unique design, HARI can match a lot of interior design requirement.

reddot award 2019
winner lighting design

SMART HOME

Smart home technology can help your home run more efficiently while helping family live in total comfort.
Lighting control system is employed to maximize energy savings.
With the help of user friendly application light could be switched on/off by one finger touch.
We use most advanced solution wireless ZigBee protocol.

SYMBOLS

CE	Complies with the European standard EN 60598-1
III	CLASS III-Devices powered by safe voltage under 50V
W W	Device suitable for use in furniture
F	Device suitable for mounting on normal flammable surfaces
	Correct disposal of this product (waste electrical & electronical equipment)
	Device can withstand weight up to Kg/cm²...
	Walk over device
mm	Hole size
X.XKg	Gross weight of the product in kg
	Use the protective shield and replace when cracked
ON/OFF	Normal
DIM TRIAC	DT Dim triac : Rear out(RPC) Mos tube dimming
DIM 1-10V	DX Dim 1-10V : The brightness can be changed through the change of 1-10V signal
DIM COLOR	DO Dim color temperature : The color temperature and brightness is dimmable
DIM TO WARM	DS The color temperature can be changed through the brightness changing
DALI DALI	DA Digital Addressable lighting interface
DIM PUSH	DP Dimmable by Push
DIM TOUCH	DT Dimmable by Sensor
IOS/ANDROID	IOS / ANDROID USB Charger
CS-3	Dual channel electronic change controller

SPECIAL LIGHT BEAM

C Clear

W White

A 20-60° Adjustable beam

P P Asymmetric beam

L 180°

D Diffused beam

I Diamond Light

O1 Oval beam

O2 Oval beam

R Radial

LED COLOURS

Color temperature

Warm White 2700K 3000K 3500K

Neutral White 4000K

Cool White 5000K 5700K 6000K

Other colors

Blue

Red

Green

Amber

Full color

RGB RGB

RGB RGB 3IN1

RGB RxGxB

RGBW RGBW 4IN1

IP RATING



The IP rating (International Protection) is regulation defined by the EN 60529 norm (recognized by the CEI organization as 70-1) which explains the protection of electric and electronic devices from extemal solidor liquid agent. The prefix IP is followed by two numbers.


❶ The first number identifies the protection degree against the entry of solid foreign objects.


- IP1X Protected from the entry of solid objects bigger than 50mm
- IP2X Protected from the entry of solid objects bigger than 12mm
- IP3X Protected from the entry of solid objects bigger than 2.5mm
- IP4X Protected from the entry of solid objects bigger than 1mm
- IP5X Protected from the entry of dust
- IP6X Completely protected from the entry of dust

❷ The second number identifies the protection degree against the entry of liquids.

- IPX0 Unprotected
- IPX1 Protected from water drops falling vertically
- IPX2 Protected from water falling with a maximun inclination of 15°
- IPX3 Protected from rain
- IPX4 Protected from sprinklings
- IPX5 Protected from water jets
- IPX6 Protected from wave
- IPX7 Protected against temporary immersion
- IPX8 Protected against permanent immersion (maximun depth 3 meters)

DIM TO WARM

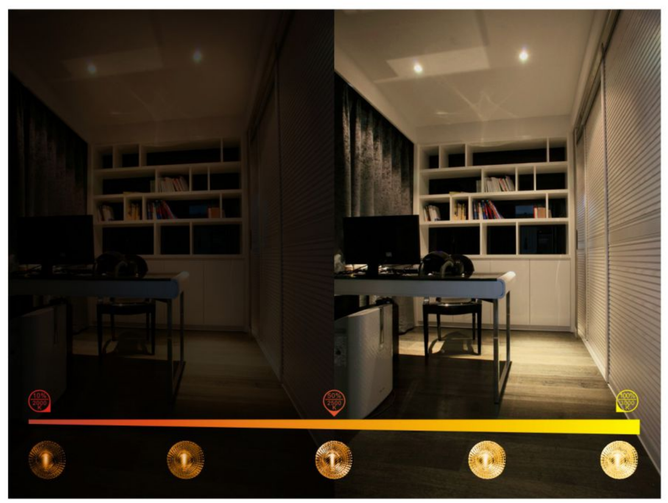

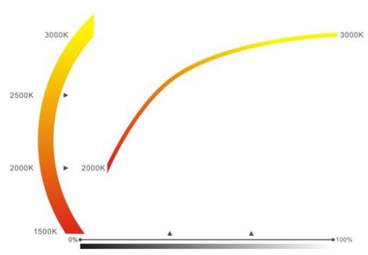

FLICKER


SVM: Stroboscopic effect visibility measure

SVM < 1, stroboscopic invisible;
SVM ≥ 1, stroboscopic visible.

FI: Flicker index

The stroboscopic index refers to the area above and below the average output of optical signal in a period of fluctuation, A1 and A2 respectively. IES recommends FI below 0.1 to ensure good lighting.


Calculation formula:FI=A1/(A1+A2)

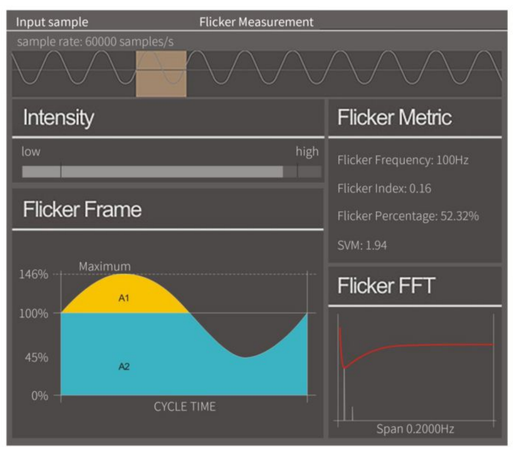

PF: Flicker Percent

The stroboscopic percentage refers to the amplitude and depth of the fluctuation in the standard brightness during a period of fluctuation.

Calculation formula:PF=(Ymax-Ymin)/(Ymax+Ymin)

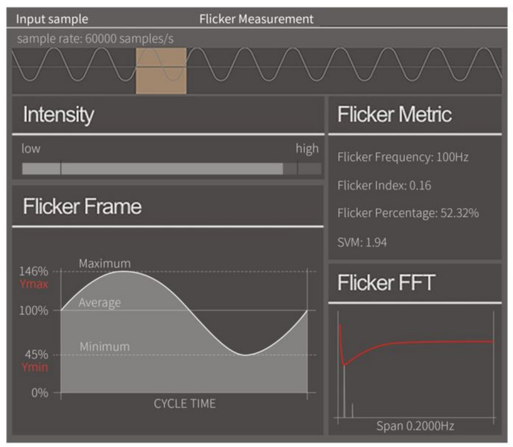

FF: Flicker Frequency

The stroboscopic frequency refers to the number of stroboscopic fluctuations per second of lamps in seconds.
Since the Fps of our eyes are 24 fps, we can't detect whether the lamps are flashing or not.
For a variety of instruments and equipment, we provide stroboscopic frequency for technical personnel to refer to.

FINISH
SINGLE COLOR

Powder spray

PAW	Matte White
PAB	Matte Black
PCS	Matte Coffee
PCY	Matte Champagne yellow
PBK	Black
PSV	Matte Grey
PGY	Matte Dark Grey
PGN	Brilliant Grean

Spray paint (Liquid)

WWP	Liquid Paint In White For Plastlc
WBP	Liquid Paint In Black For Plastlc
WCP	Liquid Paint In Coffee For Plastlc
WSG	Silver Grey
WGL	Golden
WOG	Orange
WBR	Painted In Reddish Brown

Stainless steel

SSS

Anodized

ABS
AGS
AMB

Electroplate

24K Gold
Rose Gold
Black Chrome
Chrome Plate
Sand Chrome

CERTIFICTIONS



INSPIRATION LIGHTING

CEILING


CRACK
23-24


DOMO 2.0
25-42


METEOR
43-46


PAPER
47-60


RING
61-70

SUSPENDED


ATHENA
73-76


AURA
77-80


BERT
81-88

BOWLING
89-92


CLASSIC
93-98

COMET P
99-100


CORONA
101-104


DARDY
105-112



EGLASS
113-114


ELISA
115-120


FAIRY
121-124


FAVOR
125-130

FEYA
131-134


FLASH
135-140

FORMULIA 2.0
141-150


LOOP
151-152

LOTEL
153-160


MIA
161-166


PALLAS
167-172


PAPER
51-60


PROMEO
173-174


RING
66-70


WAVE
175-188

BEAUTIFICATION


ADRAY
191-192



ASTRA
193-196


AUREOLE
197-198


BALANCE
199-202

BEATTY
203-206


BEL
207-210


BEND
211-216


BOW
217-220

BOWLING
89-92


COAL
221-224


CUBO
225-228


CURES
229-232

DREAM
233-234

ELF
235-236

FISHING
237-240

FOLD
241-244

GEMO
245-248

HEMLINE
249-250

KARINA
251-256

KUBIK
257-258

LIGHTBAR
259-262

LIRA
263-272

LOTEL
156-160

LUXURY
273-276

MIRO
277-282

MOON
283-284

SET
285-286

SHELL
287-288

SINE
289-290

SONG
291-294

TV
295-296

WALL LINE 2.0
297-300

WING
301-304

INSPIRATION LIGHTING

WALL ROTARY



DONNA
307-310



LEGGO
311-312



OTLY
313-316



ROSA
317-318



TATOU
319-322

WALL INSTRUCTIONS



CARD
325-328



DANAS
329-332



KEATON
333-334



SLIDE
335-342



SNOW
343-346



TONE
347-352

TABLE LAMP



AGARIC
355-356



ALFA
357-360



COLUMN
361-368



COSMOS
369-372



LAGO
373-374



SEPHORA
375-378

FLOOR LAMP



ATLAS
381-384



ALFA
358-360



ANDROMEDA
385-386



CIDA
387-390



COLUMN
363-368



FISHING
239-240

FLOOR LAMP



HARI
391-392



LIRA
267-272

PERFORM YOUR LIGHT

WWW.FLUA.COM

INTERIOR

23-61	CEILING RECESSED
73-188	CEILING SUSPENDED
191-322	WALL SURFACE
325-352	WALL RECESSED
355-378	TABLE LAMP
381-392	FLOOR LAMP

ACCESSORIES

395-404	ELECTRICAL SYSTEM

CEILING



CRACK
24



DOMO 2.0 IN 16 AD
27



DOMO 2.0 IN 26 AD
27



DOMO 2.0 IN 35 AD
27



DOMO 2.0 IN 65 AD
28



DOMO 2.0 IN 95 AD
28



DOMO 2.0 ON 11
29



DOMO 2.0 ON 16
30



DOMO 2.0 ON 26
29



DOMO 2.0 ON 35
30



DOMO 2.0 ON 11 AD
29



DOMO 2.0 ON 16 AD
30



DOMO 2.0 ON 26 AD
29



DOMO 2.0 ON 35 AD
30



DOMO 2.1 ON 45
31



DOMO 2.0 ON 60
31



DOMO 2.0 ON 65
31



DOMO 2.0 ON2 95
32



DOMO 2.0 ON2 35
33



DOMO 2.0 ON2 65
33



DOMO 2.0 ON2 95
33



CRACK
46



PAPER 2.0 ONR SS
49



PAPER 2.0 ONR S
49



PAPER 2.0 ONR M
49



PAPER 2.0 ONR L
49



PAPER 2.0 ONS
53

RING IN 45
63

RING IN 80
63



RING ON 12
64




RING ON 24
64




RING ON 12 AD
65



RING ON 24 AD
65

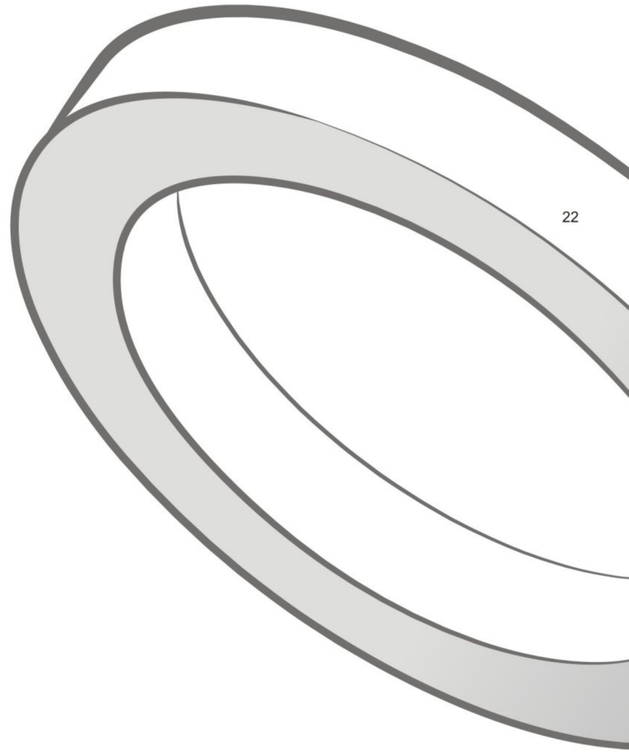

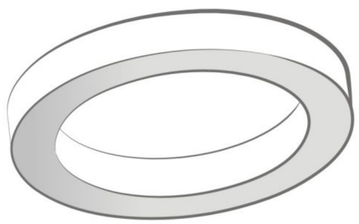

WWW.FLUA.COM

PERFORM YOUR LIGHT

CRACK

The eye catcher luminaire has become a great example of light and art combination. The result is CRACK.
CRACK, as its name indicates, creates the effect of crack on the ceiling, thanks to its unique design concept. The fitting has 2*8.4W LED each with 15 beam angle. Most dramatic light and decorative effect can be produced with CRACK, creating a high contract lighting effect between dark and light.

IP20 100-240VAC DIM TRIAC






CRACK

LED POWER: 2*8.4W
CRI: 90
SYSTEM POWER: 2*10.5W
OUTPUT: 853Lm/3000K
INPUT:100-240VAC,50/60Hz
DIMENSION: 676*214*88mm
HOLE SIZE: /

192611A







ANGLE 15°



8.4W 15° 3000K



8.4W 15° 3000K



RECOMMEND:

ON/OFF
192611A

OTHER VERSIONS:

DIM TRIAC
192611DT

DOMO

DOMO, with its pure geometrical shapes and perfect diffused light,
creates unique harmonious atmosphere for any room, generating pleasant light effect.
From direct surface mounted to installation with adjustable bracket,
from trimless to pendant versions, DOMO series provides various installation choices.
To enlarge DOMO collection, up/down version was specially
created for surface mounted and suspended range.

CE IP20 100/220-240VAC DIM COLOR DIM 1-10V



IN 16 AD



IN 26 AD




IN 35 AD




IN 65 AD



IN 95 AD






ON 11




ON 11 AD



ON 16




ON 16 AD



ON 26



ON 26 AD

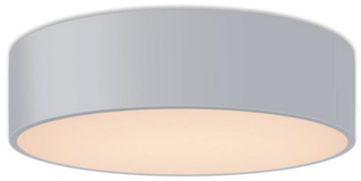

ON 35



ON 35 AD



ON 60 AC



ON 45 AC

DOMO 2.1



ON2 95



ON2 45



ON2 65


DOMO 2.0 IN 16 AD

LED POWER:9.6W
CRI: 90
SYSTEM POWER:11.2W
OUTPUT: 875Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø198*100mm
HOLE SIZE: Ø200mm


153614A




ANGLE L



9.6W L 3000K




9.6W L 3000K




DOMO 2.0 IN 26 AD

LED POWER:15.7W
CRI: 90
SYSTEM POWER:19.2W
OUTPUT: 1056Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø260*105.7mm
HOLE SIZE: Ø305mm


188114A




ANGLE L



15.7W L 3000K



15.7W L 3000K



DOMO 2.0 IN 35 AD

LED POWER:20.1W
CRI: 90
SYSTEM POWER:23.7W
OUTPUT: 1304Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø350*105.7mm
HOLE SIZE: Ø395mm

L

188214A



DOMO 2.0 IN 65 AD

LED POWER:43.4W
CRI: 90
SYSTEM POWER:48.3W
OUTPUT: 2657Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø650*115mm
HOLE SIZE: Ø695mm

L

188314A



DOMO 2.0 IN 95 AD

LED POWER:95W
CRI: 90
SYSTEM POWER:106W
OUTPUT: 5830Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø950*115mm
HOLE SIZE: Ø995mm


L

188414A




DOMO 2.0 ON 11 / ON 11 AD


LED POWER:4.8W
CRI: 90
SYSTEM POWER:5.8W
OUTPUT: 307Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø110*50mm
Ø110*75.5mm
HOLE SIZE: /




ANGLE L



4.8W L 3000K




4.8W L 3000K




DOMO 2.0 ON 16 / ON 16 AD


LED POWER:9.6W
CRI: 90
SYSTEM POWER:11.2W
OUTPUT: 875Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø160*50mm
Ø160*80.5mm
HOLE SIZE: /




ANGLE L



9.6W L 3000K




9.6W L 3000K



DOMO 2.0 ON 26

LED POWER: 24.8W
CRI: 90
SYSTEM POWER: 29.8W
OUTPUT: 1597Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø260*60mm
HOLE SIZE: /





DOMO 2.0 ON 26 AD

LED POWER: 15.7W
CRI: 90
SYSTEM POWER: 19.2W
OUTPUT: 1056Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø260*104.8mm
HOLE SIZE: /






DOMO 2.0 ON 35

LED POWER: 32.8W
CRI: 80
SYSTEM POWER: 38.6W
OUTPUT: 2239Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø350*60mm
HOLE SIZE: /






DOMO 2.0 ON 35 AD

LED POWER: 20.1W
CRI: 90
SYSTEM POWER: 23.7W
OUTPUT: 1304Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø350*104.8mm
HOLE SIZE: /





DOMO 2.1 ON 45 AC

LED POWER: 45.7W/AC LED
CRI: 80
SYSTEM POWER: 45.7W
OUTPUT: 3592Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø450*93.2mm
HOLE SIZE: /

L




RECOMMEND

DIM TRIAC
223214DT

DOMO 2.1 ON 65 AC

LED POWER: 66.6W/AC LED
CRI: 80
SYSTEM POWER: 66.6W
OUTPUT: 5366Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø650*93.2mm
HOLE SIZE: /

L



RECOMMEND

DIM TRIAC
223314DT

DOMO 2.1 ON2 45 DO

LED POWER: 39.3+8.3W
CRI: 90
SYSTEM POWER: 54.4W
OUTPUT: 3620Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø450*93.2mm
HOLE SIZE: /

L




RECOMMEND

DIM COLOR
RF-2.4
222714DO

DOMO 2.1 ON2 65 DO

LED POWER: 54.3+9.96W
CRI: 90
SYSTEM POWER: 74W
OUTPUT: 5060Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø650*93.2mm
HOLE SIZE: /

L




RECOMMEND

DIM COLOR
RF-2.4
222914DO

DOMO 2.1 ON2 95 DO

LED POWER: 130+12.45W
CRI: 90
SYSTEM POWER: 131.5W
OUTPUT: 8664Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø950*93.2mm
HOLE SIZE: /

L



RECOMMEND

DIM COLOR
RF-2.4
223114DO

DOMO 2.1 ON2 45 / ON2 45 CS-3

LED POWER: 40.32+6.4W
CRI: 90
SYSTEM POWER: 43.8+8.9W
OUTPUT: 2858+493Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø450*93.2mm
HOLE SIZE: /

L

RECOMMEND

DIM 1-10V
221814DX

ON/OFF
221914A



DOMO 2.1 ON2 65 / ON2 65 CS-3

LED POWER: 61.6W+8W
CRI: 90
SYSTEM POWER: 69W+11.9W
OUTPUT: 4905+659Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø650*93.2mm
HOLE SIZE: /

L

RECOMMEND

DIM 1-10V
222114DX

ON/OFF
222214A

DOMO 2.1 ON2 95 / ON2 95 CS-3


LED POWER: 98.56+11.2W
CRI: 90
SYSTEM POWER: 103+15W
OUTPUT: 8246+815Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø950*93.2mm
HOLE SIZE: /


L


RECOMMEND


DIM 1-10V
222414DX

ON/OFF
222514A



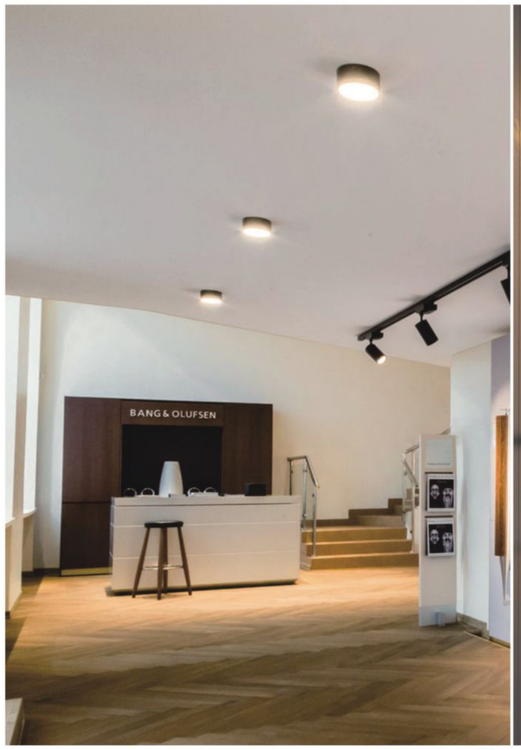
BANG & OLUFSEN

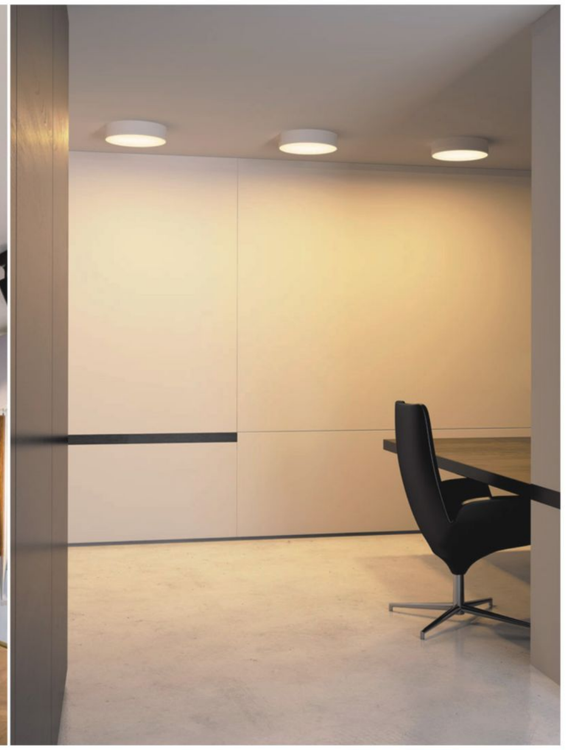

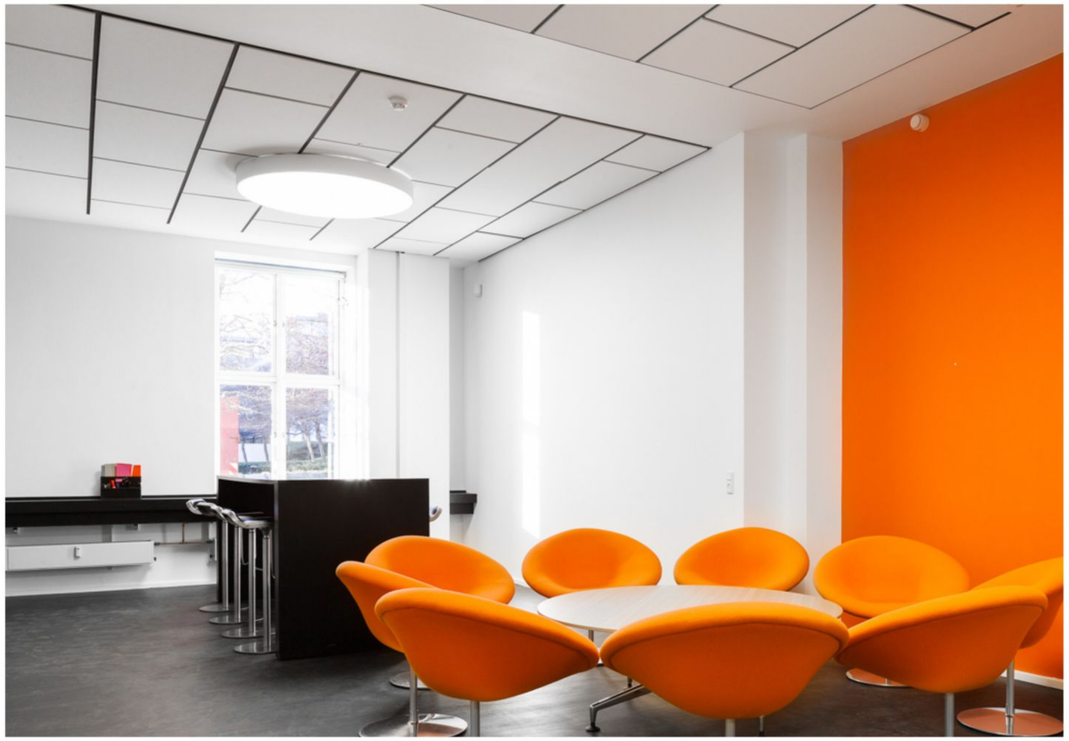



DOMO



METEOR

Constructing geometric sculptures of light,
METEOR establishes an intimate relationship with space
and combines functionality with beauty of pure lines.
Thanks to METEOR narrow beam angle, just 15°,
it can create perfect light effect, focusing on separate objects in the room.
Installed in a group, with different heights and angles,
METEOR creates unique lighting patterns on the ceiling.

IP20 220-240VAC DIM TRIAC








IN TRIMLESS

METEOR IN TRIMLESS


LED POWER: 6W
CRI: 90
SYSTEM POWER: 7.1W
OUTPUT: 413Lm/3000K
INPUT: 220-240VAC,50/60Hz

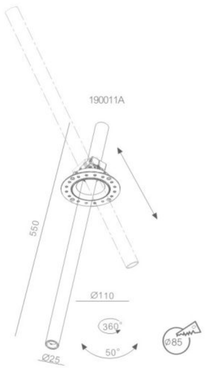


ANGLE 15°



6W 15° 3000K



6W 15° 3000K




RECOMMEND:

ON/OFF
190011A

OTHER VERSIONS:

DIM TRIAC
190011DT

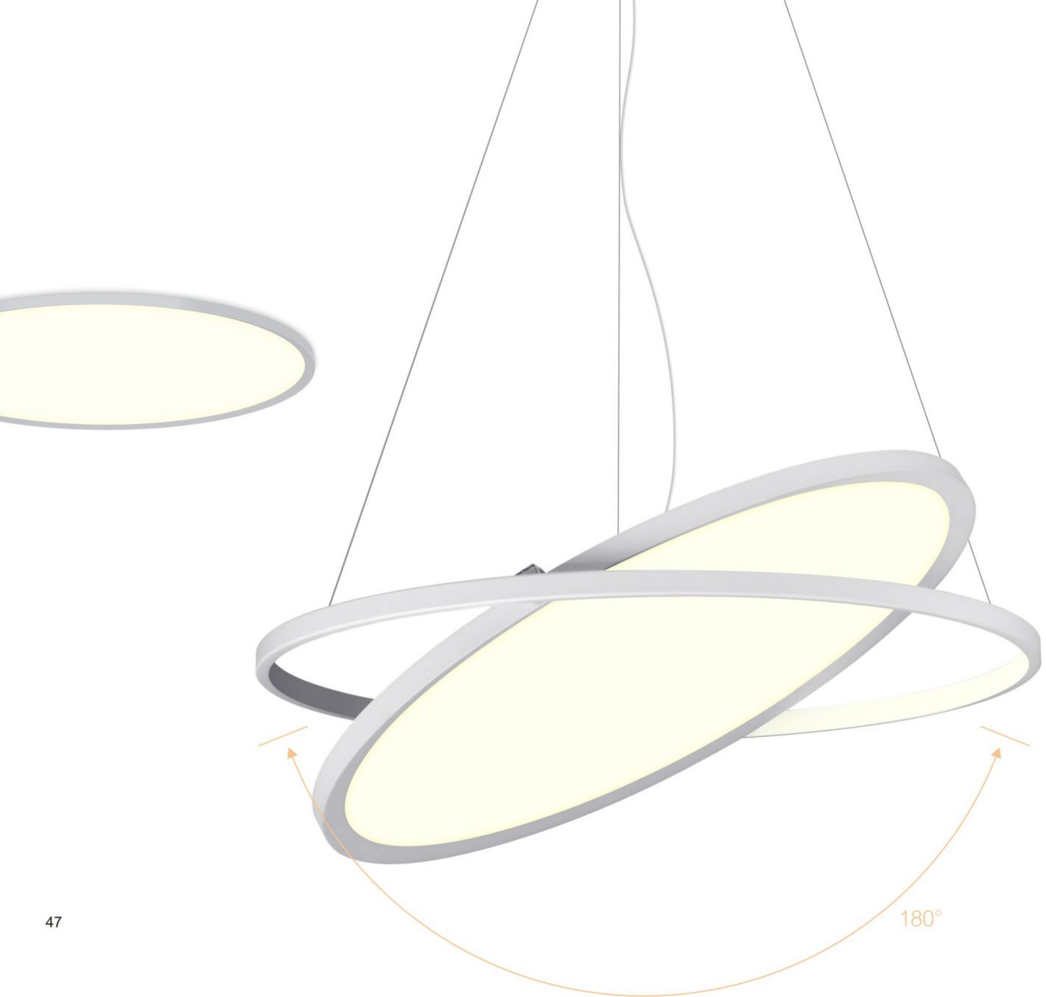







PAPER 2.0


PAPER with its pure geometrical shapes and soft
diffused light guarantees splendid atmosphere to the room.
PAPER collection comes with 4 sizes for round shaped version and
2 sizes for rectangular shaped fixture. Both versions can be
suspended or surface mounted.
In addition, PAPER has DIM COLOR function.
Suspended version is equipped by special adjustable function.

IP20 | 100/220-240VAC | DIM COLOR | DIM 1-10V

PAPER 2.0 ONR/PR/PS

Suggestions for supporting use in the above products







ONR M



ONR L



ONR S



ONR SS







PR S



PR M



PR L



PR SS



PR S AD



ONS




PS M / PS DO








Color Temperature Adjustable
2700K-5700K

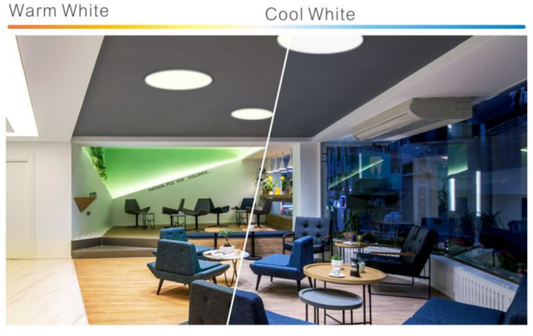

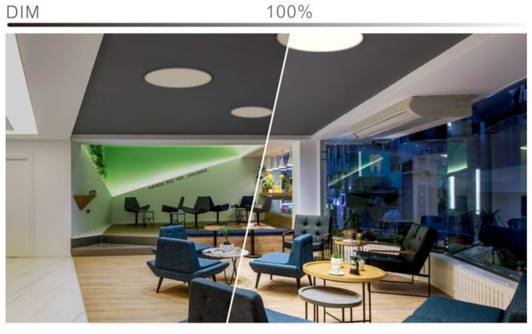



PAPER 2.0 ONR SS

220514DO



LED POWER: 36.8W
CRI: 90
SYSTEM POWER: 44W
OUTPUT: 1720Lm/2700-5700K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø439*50.5mm
HOLE SIZE: /

L

RECOMMEND

DIM COLOR
RF-2.4
220514DO

OTHER VERSIONS:

DIM 1-10V
219414DX

PAPER 2.0 PR SS

324114DO



LED POWER: 36.8W
CRI: 90
SYSTEM POWER: 44W
OUTPUT: 1760Lm/2700-5700K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø438*80mm
HOLE SIZE: /

L

RECOMMEND

DIM COLOR
RF-2.4
324114DO

OTHER VERSIONS:

DIM 1-10V
321914DX

PAPER 2.0 PR S AD

324514DO



LED POWER: 52W
CRI: 90
SYSTEM POWER: 62W
OUTPUT: 2480Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø694*22mm
HOLE SIZE: /

L

RECOMMEND

DIM COLOR
RF-2.4
324514DO

PAPER 2.0 ONR S

220614DO



LED POWER: 52W
CRI: 90
SYSTEM POWER: 62W
OUTPUT: 2480Lm/2700-5700K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø646*60mm
HOLE SIZE: /

L

RECOMMEND

DIM COLOR
RF-2.4
220614DO

OTHER VERSIONS:

DIM 1-10V
219014DX

PAPER 2.0 PR S

324214DO



LED POWER: 52W
CRI: 90
SYSTEM POWER: 62W
OUTPUT: 2480Lm/2700-5700K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø646*80mm
HOLE SIZE: /

L

RECOMMEND


DIM COLOR
RF-2.4
324214DO

OTHER VERSIONS:

DIM 1-10V
321614DX

PAPER 2.0 PS

325714DO



LED POWER: 45.3W
CRI: 90
SYSTEM POWER: 48W
OUTPUT: 2250Lm/2700-5700K
INPUT: 100-240VAC,50/60Hz
DIMENSION: 1200*300*16mm
HOLE SIZE: /

L

RECOMMEND

DIM COLOR
RF-2.4
325714DO

OTHER VERSIONS:

DALI DIM PUSH
303514DP

PAPER 2.0 ONR M

220714DO



LED POWER: 70W
CRI: 90
SYSTEM POWER: 84W
OUTPUT: 3360Lm/2700-5700K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø853*60mm
HOLE SIZE: /

L

RECOMMEND

DIM COLOR
RF-2.4
220714DO

OTHER VERSIONS:

DIM 1-10V
219114DX

PAPER 2.0 PR M

324314DO



LED POWER: 70W
CRI: 90
SYSTEM POWER: 84W
OUTPUT: 3360Lm/2700-5700K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø853*82mm
HOLE SIZE: /

L

RECOMMEND

DIM COLOR
RF-2.4
324314DO

OTHER VERSIONS:

DIM 1-10V
321714DX

PAPER 2.0 ONS M

208814DP



LED POWER: 44.2W
CRI: 80
SYSTEM POWER: 52W
OUTPUT: 2080Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 1200*300*52mm
HOLE SIZE: /


L

RECOMMEND

DALI DIM PUSH
208814DP

PAPER 2.0 ONR L

220814DO



LED POWER: 86W
CRI: 90
SYSTEM POWER: 103W
OUTPUT: 4120Lm/2700-5700K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø1060*82mm
HOLE SIZE: /

L

RECOMMEND

DIM COLOR
RF-2.4
220814DO

OTHER VERSIONS:

DIM 1-10V
219214DX

PAPER 2.0 PR L

324414DO



LED POWER: 86W
CRI: 90
SYSTEM POWER: 103W
OUTPUT: 4120Lm/2700-5700K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø1060*86mm
HOLE SIZE: /

L

RECOMMEND

DIM COLOR
RF-2.4
324414DO

OTHER VERSIONS:

DIM 1-10V
321814DX

RING

A combination of slim lighting disks, floating in the space, could bring unforgettable enigmatic atmosphere to any room, be it residential or commercial areas. Diffused light produces uniformed and perfectly balanced lighting effect. RING could be installed directly, or with flexible bracket, that can tilt the disk up to 45°, rack mounted version is also available. Trimless version was created specially to complete RING collection.

CCC CE IP20 100/220-240VAC DALI

IN 45

IN 80



ON 12



ON 24



ON 12 AD



ON 24 AD



P 24




P 45





RING IN45

LED POWER: 37.8W
CRI: 90
SYSTEM POWER: 45W
OUTPUT: 2680Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø725*54.5mm
HOLE SIZE: Ø735mm



L

RECOMMEND


ON/OFF
190314A

OTHER VERSIONS:

DALI
190314DA

RING IN80

LED POWER: 72W
CRI: 90
SYSTEM POWER: 80W
OUTPUT: 4910Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø1150*54.5mm
HOLE SIZE: Ø1160mm



L

RECOMMEND

ON/OFF
190414A

OTHER VERSIONS:

DALI
190414DA

RING ON12

LED POWER: 10.5W
CRI: 80
SYSTEM POWER: 12W
OUTPUT: 859Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø250*50mm
HOLE SIZE: /




L

RECOMMEND

ON/OFF
217014A

RING ON 24

LED POWER: 21W
CRI: 80
SYSTEM POWER: 24W
OUTPUT: 1565Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø390*50mm
HOLE SIZE: /




L

RECOMMEND

ON/OFF
217114A

RING ON12 AD

LED POWER: 10.5W
CRI: 80
SYSTEM POWER: 12W
OUTPUT: 850Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø250*95.6mm
HOLE SIZE: /




L

RECOMMEND

ON/OFF
217214A

RING ON 24 AD

LED POWER: 21W
CRI: 80
SYSTEM POWER: 24W
OUTPUT: 1565Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø390*139.4mm
HOLE SIZE: /




L

RECOMMEND

ON/OFF
217314A

RING P 24

LED POWER: 21W
CRI: 80
SYSTEM POWER: 24W
OUTPUT: 1565Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø390*50mm
HOLE SIZE: /




L

RECOMMEND

ON/OFF
309314A

RING P 45

LED POWER: 37.8W
CRI: 80
SYSTEM POWER: 45W
OUTPUT: 2650Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø700*50mm
HOLE SIZE: /



L

RECOMMEND

ON/OFF
309414A

SUSPENDED


NEW
ATHENA
74


AURA S
77


AURA L
77


NEW
BERT RS DO/RS
83


NEW
BERT RM DO/RM
83


NEW
BERT RL DO/RL
83


NEW
BERT VS DO
84


NEW
BERT VM DO
84


NEW
BERT VL DO
84


BOWLING P
90



CLASSIC ROUND
94


CLASSIC ELLIPSE
95


COMET P
100



CORONA P3
102


CORONA P5
103


DARDY W1
106


DARDY W1P
106


DARDY W3
107


DARDY W6
108


EGLASS
114


NEW
ELISA 300DO/300
116


NEW
ELISA 400DO/400
116


NEW
ELISA 600DO/600
116


NEW
FAIRY G4
122



NEW
FAIRY G11
122


FAVOR P
126


FAVOR P+
126


FEYA GLASS
132


FEYA GLASS TRIMLESS
132


FLASH P SQ
136


FLASH P
137

FLASH V
139

FORMULIA 350
142

FORMULIA 550
142

FORMULIA 750
142

FORMULIA 350 TRIMLESS
143

FORMULIA 550 TRIMLESS
143

FORMULIA 750 TRIMLESS
143


FORMULIA L 350 GROUP
144

FORMULIA L 550 GROUP
145

FORMULIA L 750 GROUP
146

LOOP P 3
151

LOOP P 6
151

LOOP P 9
151

LOTEL P150
154

LOTEL P225
154

LOTEL P300
154

LOTEL P400
155

LOTEL P 600
155

MIA S
162

MIA S TRIMLESS
162

MIA GROUP
163

PALLAS FUNNEL
168

PALLAS EGG
168

PALLAS DIAMOND
169

PALLAS FUNNEL TRIMLESS
169

PALLAS EGG TRIMLESS
170

PALLAS DIAMOND TRIMLESS
170

PAPER SS
51

PAPER S
51

PAPER M
51

PAPER L
51

NEW
PAPER PR S AD
52

NEW
PAPER PS M/PS DO
54

PROMEO L1
173

PROMEO L2
173

PROMEO L3
173

RING P 24
66

RING P 45
66

WAVE H S 30 DN
175

NEW
WAVE H L 30 DN
176

WAVE V S 20 UP
177

WAVE V LS 30 UP
178

WAVE V L 30 UP
179

WAVE V S 10 DN
180

WWW.FLUA.COM

PERFORM YOUR LIGHT





SPOT

ATHENA

Minimalism is coming in each tiny detail, minimal decoration and maximum comfort,
functionality and laconism.
ATHENA is a great example of design with minimal details.
This is a great integration of furniture and lighting.
This splendid pendant spot is designed specially to provide new solution for reading lamp.
The maximum length of suspending system, 170 mm,
can be easily adjusted in accordance to required design.
In addition, touch DIM function makes it easy to DIM the lamp.

IP20 100-240VAC DIM TOUCH

ATHENA SPOT


LED POWER: 3.6W
CRI: 90
SYSTEM POWER: 5W
OUTPUT: 296Lm/3000K
INPUT: 100-240VAC
DIMENSION: Ø42*130mm
HOLE SIZE: /

RECOMMEND


DIM TOUCH
324615DT




ANGLE 23°




3.6W 23° 3000K



3.6W 23° 3000K



COLOR FINISHINGS:



PAB PAW





AURA L

AURA M

AURA

Minimalism and functionality
are key words to describe AURA collection.
Pure geometrical forms, where all proportions and details are considered,
make AURA extremely popular range. Be it residential or commercial spaces,
AURA is the best choice for bar tables or dining rooms.
2 sizes are available.

IP20 220-240VAC DIM TRIAC





AURA M

LED POWER:15W AC-LED
CRI: 80
SYSTEM POWER:15W
OUTPUT: 786Lm/3000K
INPUT: 230-240VAC,50/60Hz
DIMENSION: Ø190*168mm
HOLE SIZE: /

L

303013DT



RECOMMEND

DIM TRIAC
303013DT

AURA L

LED POWER:30W AC-LED
CRI: 80
SYSTEM POWER:30W
OUTPUT: 1491Lm/3000K
INPUT: 230-240VAC,50/60Hz
DIMENSION: Ø243*199mm
HOLE SIZE: /

L

304013DT



RECOMMEND

DIM TRIAC
304013DT

COLOR FINISHINGS:



WBL - WGL WBL - WSG WWH - WSG

BERT

A series of slim rings floating through space, with its retro-look appearance is the best choice for many applications.
3 diameters are available for choice. This circle of leds is specially designed to guarantee a uniform and perfectly balanced light output, resulting in a very enjoyable diffuse lighting effect.

IP20 | 100/220-240VAC | DIM COLOR 2.4 | DIM 1-10V



TURN OFF




TURN ON

BERT RS DO/RM DO/ RL DO/ VS DO/ VS DO/ VS DO

Suggestions for supporting use in the above products



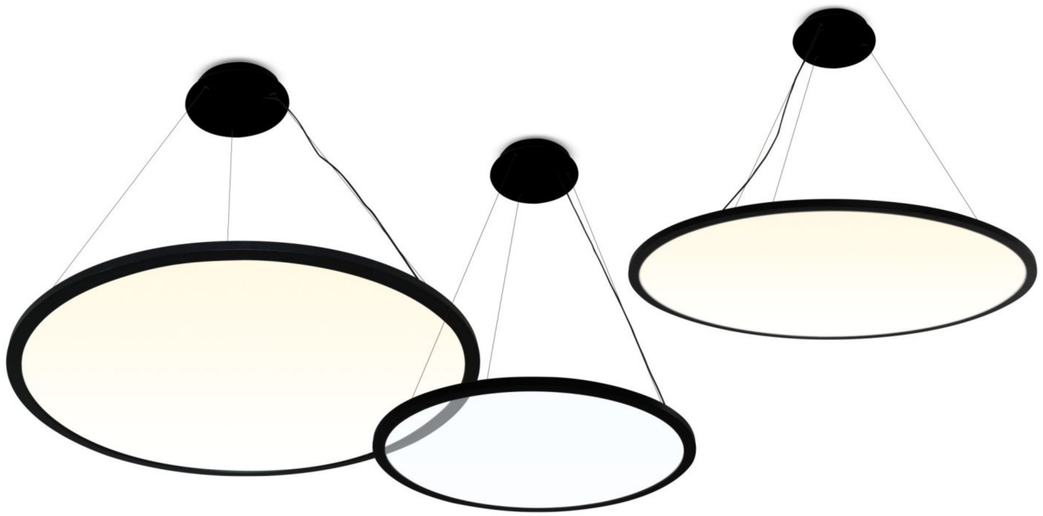

RL DO/RL

RS DO/RS

RM DO/RM



VM DO

VS DO

VL DO



Color Temperature Adjustable
2700K-5700K

Warm White — Cool White



DIM — 100%





BERT RS DO

LED POWER: 42W
CRI: 90
SYSTEM POWER: 48W
OUTPUT: 2640Lm/2700-5700K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø730*18mm
HOLE SIZE: /

L



RECOMMEND

DIM COLOR
RF-2.4
324714DO

BERT RS

LED POWER: 40W
CRI: 90
SYSTEM POWER: 47W
OUTPUT: 2585Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø730*18mm
HOLE SIZE: /

L



RECOMMEND

DIM 1-10V
322414DX

BERT VS DO

LED POWER: 42W
CRI: 90
SYSTEM POWER: 48W
OUTPUT: 2640Lm/2700-5700K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø730*18mm
HOLE SIZE: /

L



RECOMMEND

DIM COLOR
RF-2.4
325014DO

BERT RM DO

LED POWER: 50.4W
CRI: 90
SYSTEM POWER: 58W
OUTPUT: 3190Lm/2700-5700K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø905*18mm
HOLE SIZE: /

L



RECOMMEND

DIM COLOR
RF-2.4
324814DO

BERT RM

LED POWER: 50W
CRI: 90
SYSTEM POWER: 58W
OUTPUT: 3190Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø905*18mm
HOLE SIZE: /

L



RECOMMEND

DIM 1-10V
322514DX

BERT VM DO

LED POWER: 50.4W
CRI: 90
SYSTEM POWER: 58W
OUTPUT: 3190Lm/2700-5700K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø905*18mm
HOLE SIZE: /

L



RECOMMEND

DIM COLOR
RF-2.4
325114DO

BERT RL DO

LED POWER: 60.5W
CRI: 90
SYSTEM POWER: 72W
OUTPUT: 3960Lm/2700-5700K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø1080*18mm
HOLE SIZE: /

L



RECOMMEND

DIM COLOR
RF-2.4
324914DO

BERT RL

LED POWER: 53.76W
CRI: 90
SYSTEM POWER: 63W
OUTPUT: 3465Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø1080*18mm
HOLE SIZE: /

L



RECOMMEND

DIM 1-10V
322614DX

BERT VL DO

LED POWER: 60.5W
CRI: 90
SYSTEM POWER: 72W
OUTPUT: 3960Lm/2700-5700K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø1080*18mm
HOLE SIZE: /

L




RECOMMEND

DIM COLOR
RF-2.4
325214DO

BOWLING

Perforated globe shape of BOWLING creates special light effect.
BOWLING is attractive for any space,
be it residential or public areas. Single or combined use of
BOWING both provides playful enigmatic atmosphere.
Bowling is available in both wall mounted and suspended versions, both dimmable.

IP20 220-240VAC DIM TRIAC

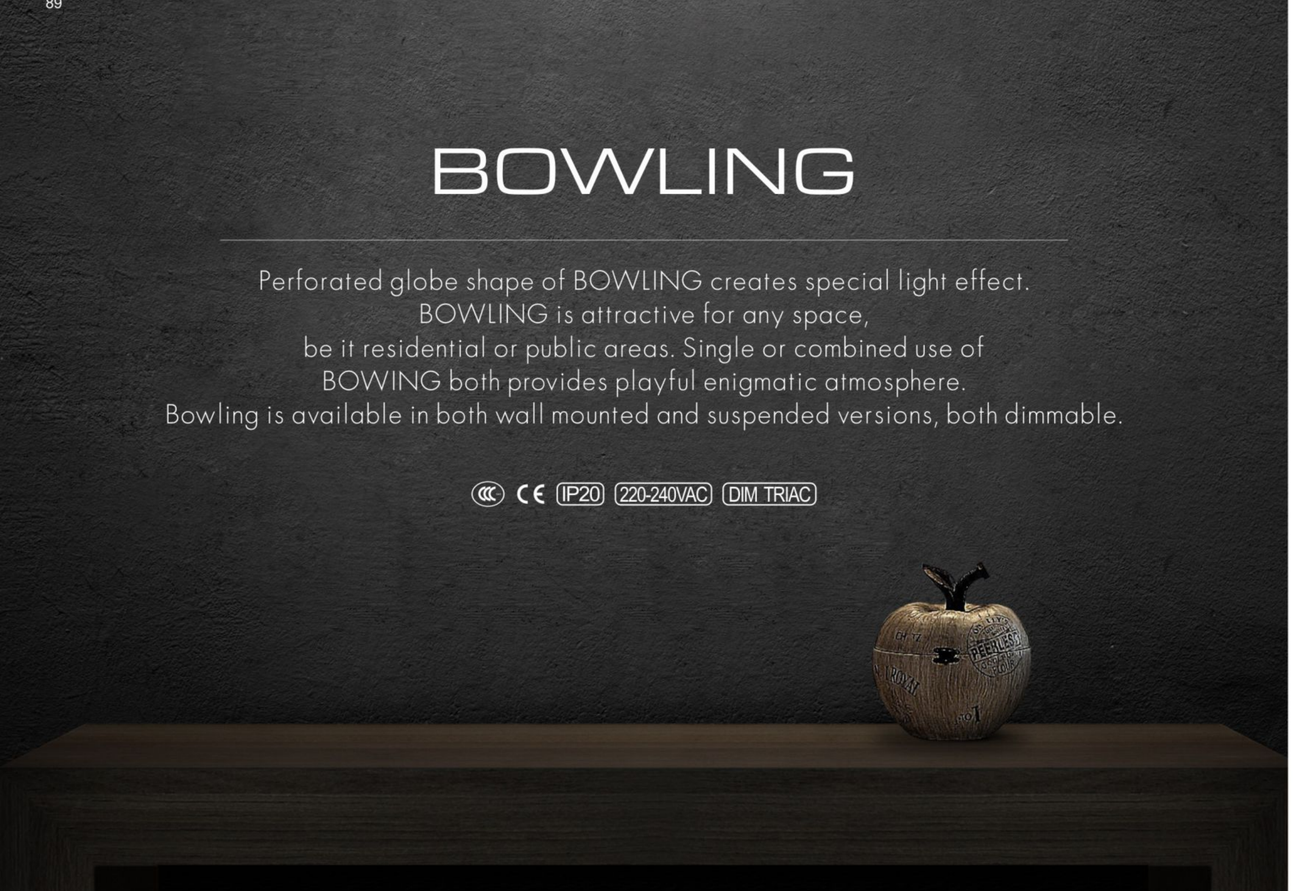




P

W



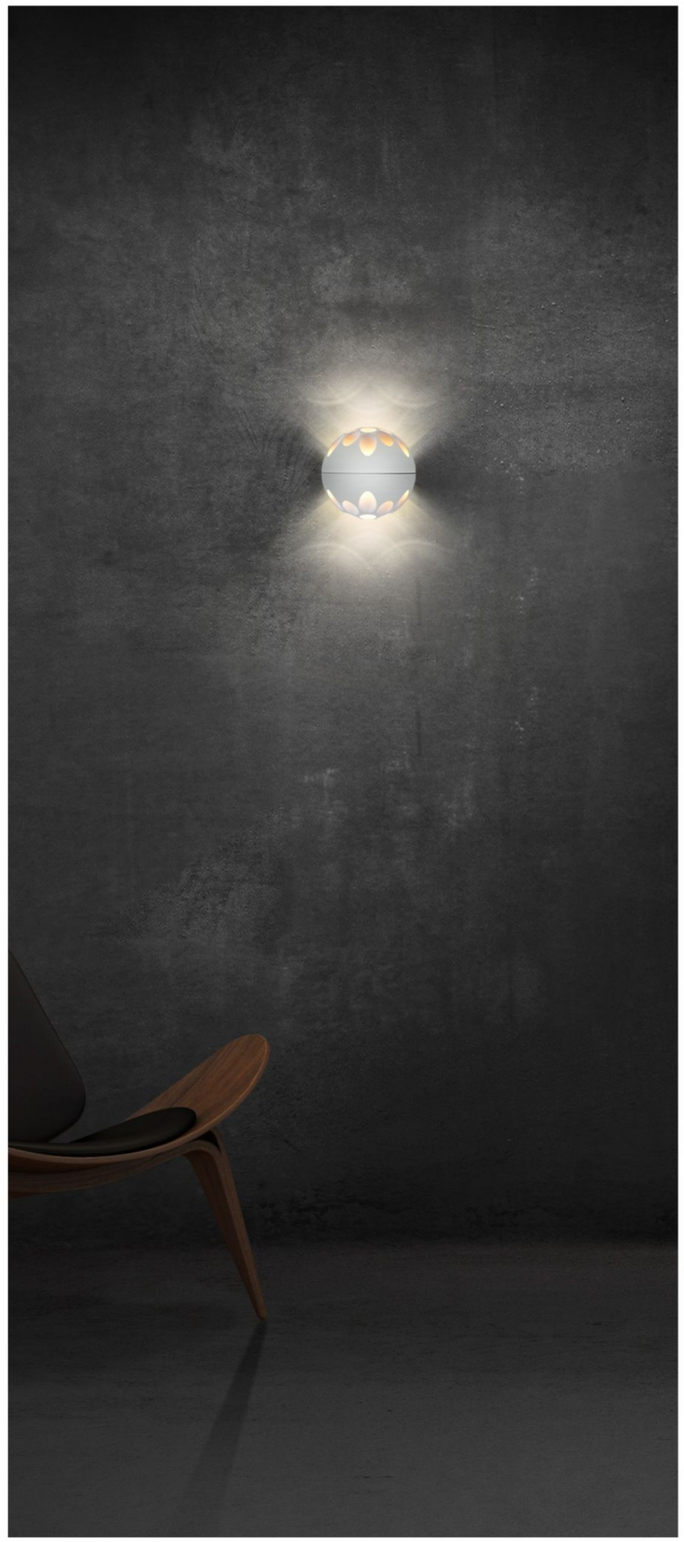

BOWLING W


LED POWER: 12.6W
CRI: 80
SYSTEM POWER: 16W
OUTPUT: 591Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø135*107mm
HOLE SIZE: /

L

RECOMMEND

DIM TRIAC
421514DT

421514DT



BOWLING P

LED POWER: 12.6W
CRI: 80
SYSTEM POWER: 16W
OUTPUT: 642Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø135*137mm
HOLE SIZE: /

L

RECOMMEND

DIM TRIAC
311214DT

311214DT






CLASSIC

CLASSIC is more than just a chandelier but rather a new concept,
where FLUA include our inspiration with creative process,
allowing the light fitting to be perfectly integrated with interior design.
The result of our work is Classic, constructed from slim metal
rods that forms a lighting sculpture.
CLASSIC is available in round and ellipse versions.
This marvelous chandelier is the best choice for hotel lobbies,
restaurants, halls and boutiques.

CE IP20 220-240VAC DIM 1-10V




ROUND

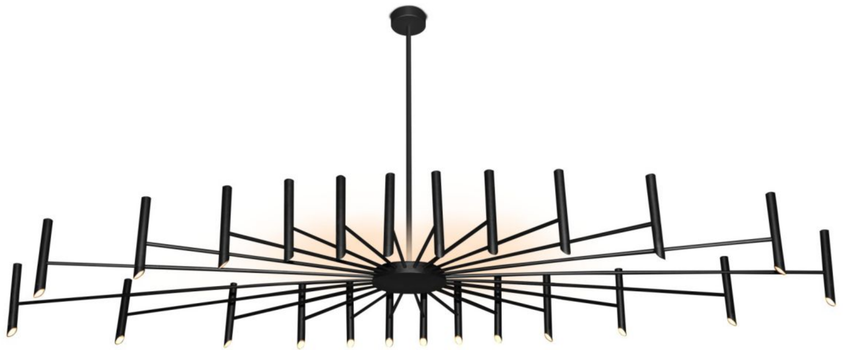

ELLIPSE





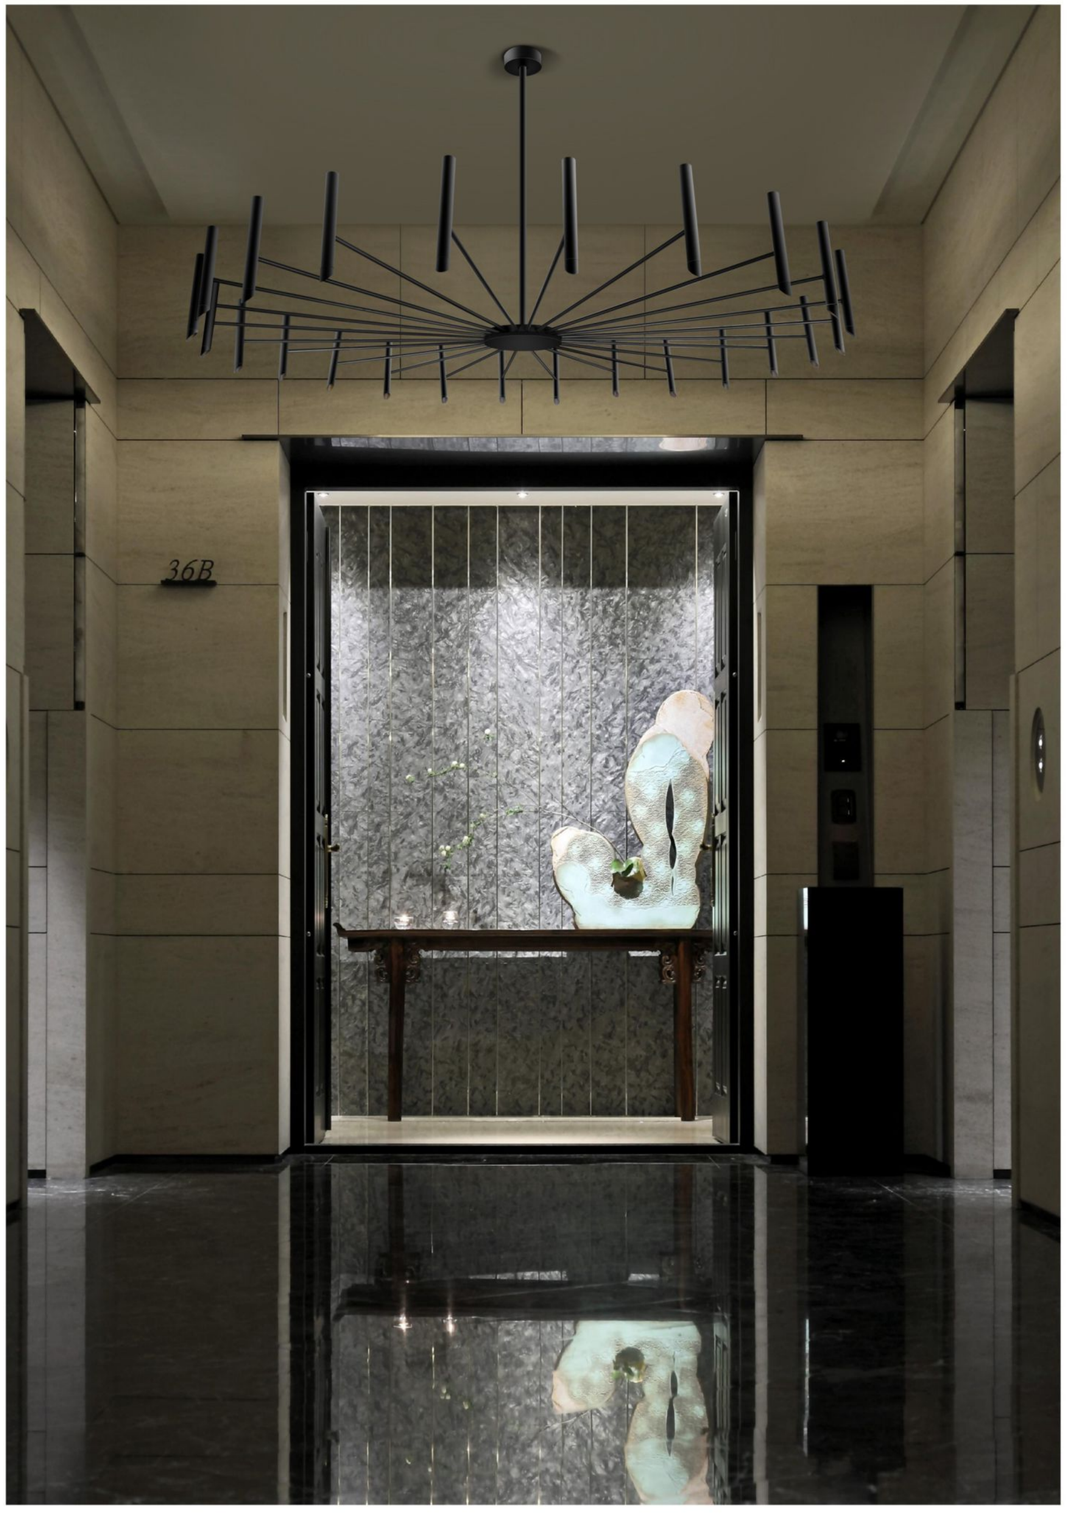

CLASSIC ROUND


LED POWER: 24*2.2W+10.5W
CRI: 90
SYSTEM POWER: 53.8W+11.4W
OUTPUT: 24*166Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø2000*1033mm
HOLE SIZE: /

L

RECOMMEND

DIM 1-10V
311517DX

311517DX

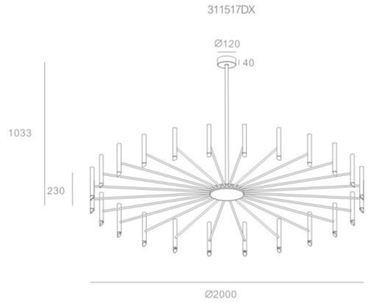

CLASSIC ELLIPSE


LED POWER: 24*2.2W+10.5W
CRI: 90
SYSTEM POWER: 53.8W+11.4W
OUTPUT: 24*166Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 2500*950*1033mm
HOLE SIZE: /

L


RECOMMEND

DIM 1-10V
311617DX


311617DX

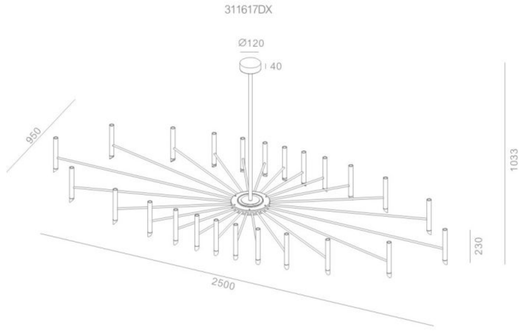


ANGLE 35°



2.2W 35° 3000K



2.2W 35° 3000K



COMET

This marvelous spot is presented with various selections: with or without frame, direct or adjustable, surfaced mounted or pendant versions. Deeply installed LED source provides perdect anti-glare effect. Thanks to narrow beam angle, just 15 , COMET creates special Intimate atmosphere to any environment, playing with light and shade.

CE IP20 220-240VAC DIM TRIAC




P


306914A

COMET P


LED POWER: UP:9.6W DOWM:8.4W
CRI: 90
SYSTEM POWER: 21.2W
OUTPUT: 353Lm+480Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø600*40.5mm
HOLE SIZE: /




ANGLE 15°



8.4W 15° 3000K



8.4W 15° 3000K



RECOMMEND

ON/OFF
306914A

OTHER VERSIONS:


DIM TRIAC
306914DT



CORONA

Unique chandelier with 3 or 5 globes for
choice has become the best
selection for dining rooms, restaurants, coffee shops.

IP20 220-240VAC

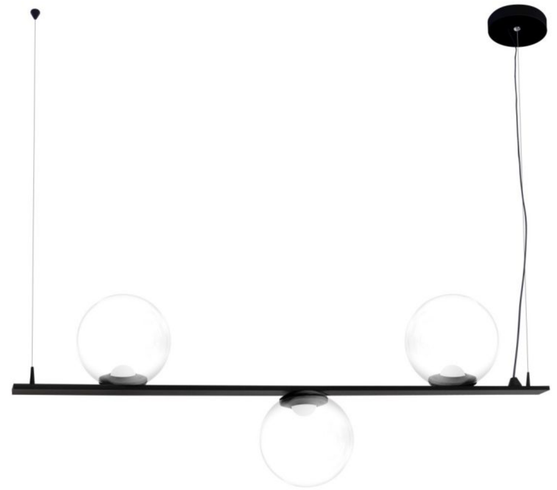


P3

CORONA P3

LED POWER:3*4.2W
CRI: 90
SYSTEM POWER:15.4W
OUTPUT: 715Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: 900*150*312mm
HOLE SIZE: /

L


311915A

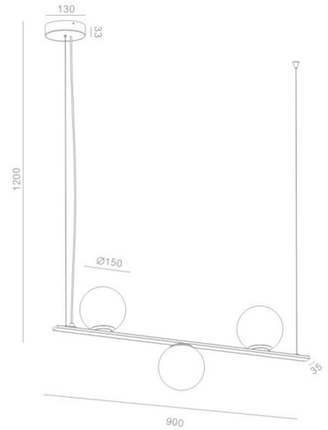



P5

312015A

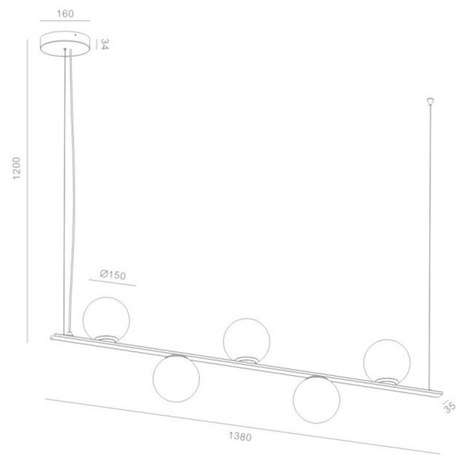

CORONA P5

LED POWER:5*4.2W
CRI: 90
SYSTEM POWER:25W
OUTPUT: 1250Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: 1380*150*312mm
HOLE SIZE: /


L



DARDY


DARDY is much more than just a lamp,
but rather innovative design
concept in lighting, integration of lighting fitting into the interior design.
DARDY is a pendant light collection constructed from
slim wires and combination of lighting fittings with different shapes.
DARDY is available with 3 different sizes as long as lamps are available in 3 shapes.
The artistic combination of different configurations can bring absolutely
new decorative effect to any room. Recommended for both residential
and hospitality projects applications.

IP20 220-240VAC

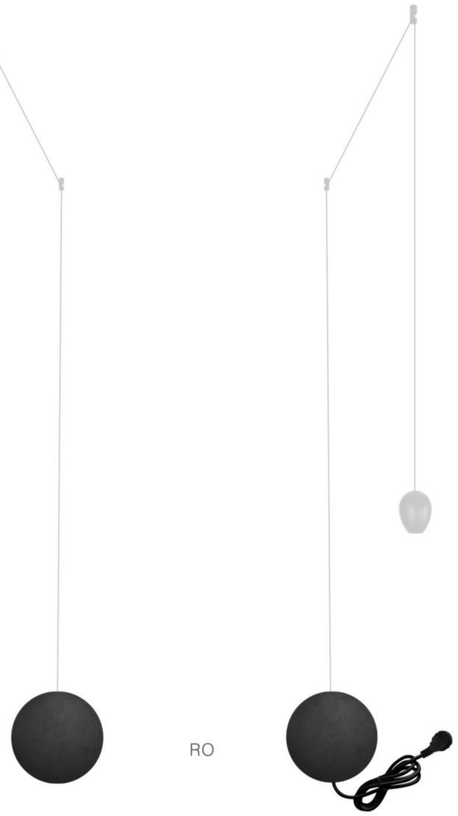


RO


W 1 W 1P

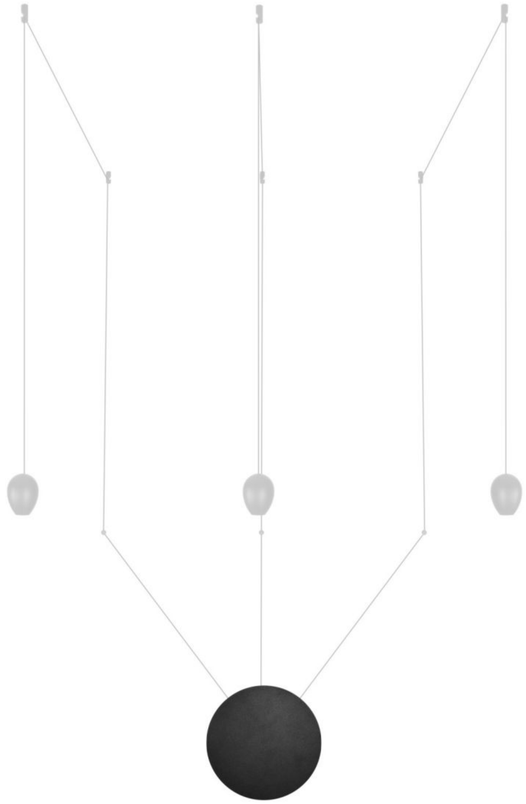

W 3

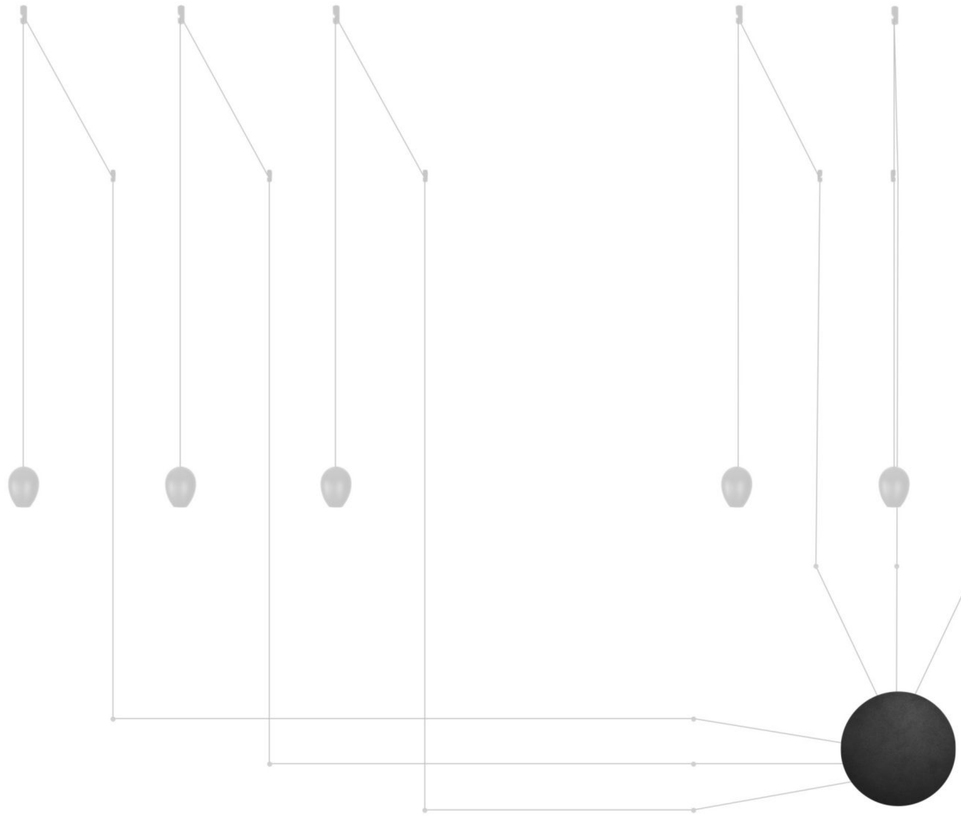

W 6

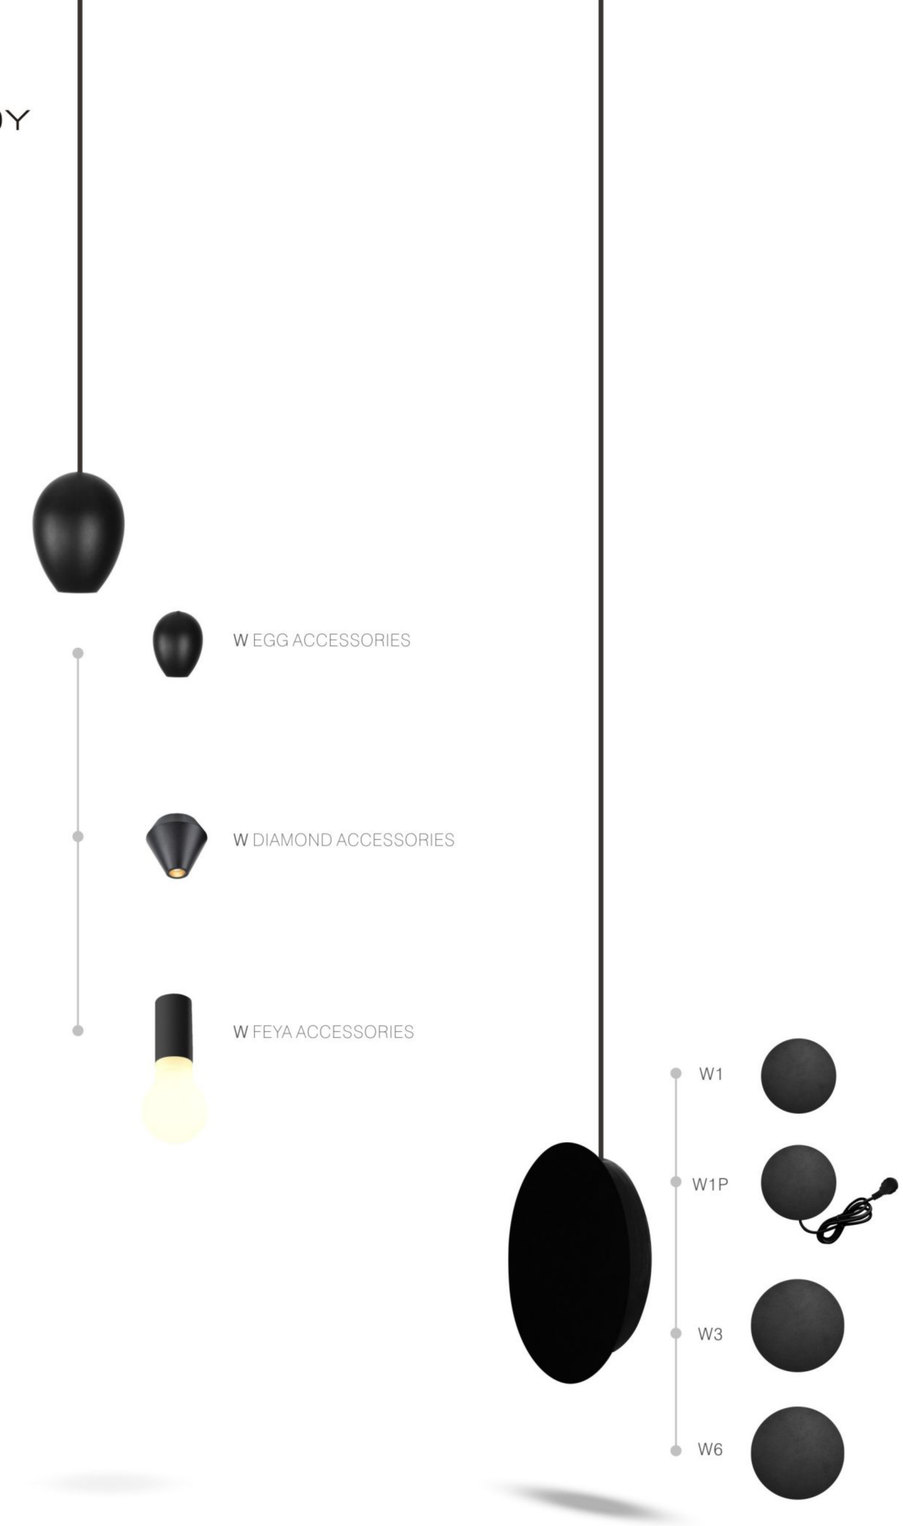

FREE COMBINATION







DARDY FEYA

001705



LED POWER: 2.2W
CRI: 90
SYSTEM POWER: 3W
OUTPUT: 96Lm/3000K
INPUT: 700mA
DIMENSION: Ø60*143mm
HOLE SIZE: /



COLOR FINISHINGS:

PAW



DARDY DIAMOND /EGG

001706

001704



LED POWER: 2.2W
CRI: 90
SYSTEM POWER: 3W
OUTPUT: 158Lm/3000K
INPUT: 700mA
DIMENSION: Ø73*68mm/Ø60*78mm
HOLE SIZE: /



COLOR FINISHINGS:



PAW PAW



DARDY W 1

INPUT: 220-240VAC
DIMENSION: Ø130*25mm
HOLE SIZE: /

001709






DARDY W 1P

INPUT: 220-240VAC
DIMENSION: Ø130*25mm
HOLE SIZE: /

001703






DARDY W 3

INPUT: 220-240VAC
DIMENSION: Ø240*36.5mm
HOLE SIZE: /

001710






DARDY W 6

INPUT: 220-240VAC
DIMENSION: Ø240*36.5mm
HOLE SIZE: /

001711



COLOR FINISHINGS:



PAW PAW

EGLASS

This splendid chandelier fuses beauty and geometry with lighting.
6 stone-shaped frosted glass lamps are hung with different heights.
This perfect composition of spheres, suspended in the air via slim cables,
play with the space, giving enigmatic atmosphere to the room.
Recommended both for residential and public areas.


IP20 220-240VAC



EGLASS

LED POWER: 6*2.2W
CRI: 90
SYSTEM POWER: 15W
OUTPUT: 948Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 125*71*Ø395mm
HOLE SIZE: /


L




ELISA

Elegance and functionality are key words to describe ELISA pendant collection.
ELISA has timeless design and can easily match both classic and modern style of the environment.
This splendid series is a great choice for dining and coffee table lighting.
3 product sizes are available for choice.
DIM2WARM function can be chosen as an option.

CE IP20 100/220-240VAC DIM COLOR DIM TRIAC DIM 1-10V

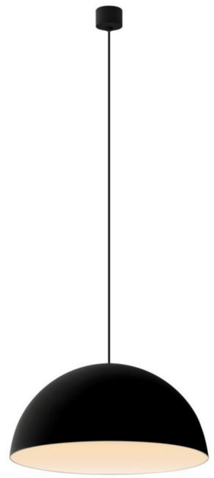

300 DO / 300

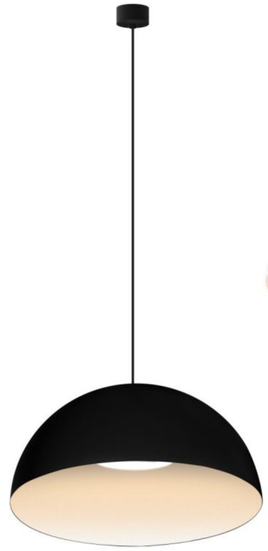

400 DO / 400



600 DO / 600

ELISA 300 DO / 400 DO / 600DO

Suggestions for supporting use in the above products









ELISA 300 DO

LED POWER: 14.7W
CRI: 90
SYSTEM POWER: 17.5W
OUTPUT: 1015Lm/2700-5700K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø300*150mm
HOLE SIZE: /

L

RECOMMEND

DIM COLOR
RF-2.4
325414DO

325414DO



ELISA 300

LED POWER: 15.5W
CRI: 80
SYSTEM POWER: 18.2W
OUTPUT: 1053Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø300*150mm
HOLE SIZE: /

L

RECOMMEND

DIM TRIAC
323014DT

323014DT



ELISA 400 DO

LED POWER: 23.5W
CRI: 90
SYSTEM POWER: 28W
OUTPUT: 1737Lm/2700-5700K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø400*200mm
HOLE SIZE: /

L

RECOMMEND

DIM COLOR
RF-2.4
325314DO

325314DO



ELISA 400

LED POWER: 25.3W
CRI: 80
SYSTEM POWER: 31.6W
OUTPUT: 2116Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø400*200mm
HOLE SIZE: /

L

RECOMMEND

DIM 1-10V
322914DX

322914DX



ELISA 600 DO


LED POWER: 43W
CRI: 90
SYSTEM POWER: 49W
OUTPUT: 2580Lm/2700-5700K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø600*300mm
HOLE SIZE: /

L

RECOMMEND

DIM COLOR
RF-2.4
325514DO

325514DO



ELISA 600


LED POWER: 40.7W
CRI: 80
SYSTEM POWER: 49W
OUTPUT: 3297Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø600*300mm
HOLE SIZE: /

L

RECOMMEND

DIM 1-10V
323114DX

323114DX



COLOR FINISHINGS:



PAB PAW





G4



G11

FAIRY

FAIRY G is a transparent glass globe fixed on long cord,
its simple and pure design will bring light
aerial decorative effect to any room.
Available in 2 different diameters and different colors.

IP20 100-240VAC



FAIRY G4

LED POWER: 3.8W
CRI: 90
SYSTEM POWER: 4.1W
OUTPUT: 170Lm/3000K
INPUT: 100-240VAC
DIMENSION: Ø150mm
HOLE SIZE: /

323919




FAIRY G11

LED POWER: 9.5W
CRI: 90
SYSTEM POWER: 10.9W
OUTPUT:738Lm/3000K
INPUT: 100-240VAC
DIMENSION: Ø300mm
HOLE SIZE: /


324019




ANGLE 36°




ANGLE 24°




3.8W 36° 3000K




9.5W 24° 3000K



3.8W 36° 3000K



9.5W 24° 3000K



OPTICS:



24°

COLOR FINISHINGS:



WWH WBL WGL

FAVOR

Thanks to its elegant design, FAVOR has already become FLUA classic collection.
Be it residential or commercial spaces, FAVOR is the best choice for accent lighting.
From wide to narrow beam angle, from recessed to surface mounted and track application,
with different color finishes and accessories combinations,
FAVOR can meet all possible lighting requirements.
Routable function makes it possible to turn up the fitting to 350° around the room.
FOCUS is available in 2 sizes;
bigger version can be chosen with SOFT DIM function.

IP20 100/220-240VAC



P



P+

COLOR FINISHINGS:

PAW



PAB







FAVOR P

LED POWER: 3.6W
CRI: 90
SYSTEM POWER: 5.3W
OUTPUT: 180Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø45*75mm
HOLE SIZE: /




FAVOR P+


LED POWER: 5.3W
CRI: 90
SYSTEM POWER: 6.4W
OUTPUT: 261Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø60*90mm
HOLE SIZE: /




ANGLE 25°




ANGLE 19°




ANGLE 32°




ANGLE 18°




3.6W 25 ° 3000K




3.6W 19° 3000K




5.3W 32° 3000K




5.3W 18° 3000K




3.6W 25° 3000K




3.6W 19° 3000K



5.3W 32° 3000K



5.3W 18° 3000K





FEYA

Vintage looking lamp FEYA is a simple design solution
for both residential and commercial areas.
Available in both surfaced and trimless version,
equipped with E27 lampholder.

IP20 220-240VAC



GLASS




GLASS TRIMLESS

FEYA GLASS


LED POWER: 6W
CRI: 90
SYSTEM POWER: 7.1W
OUTPUT: 446Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø60*143mm
HOLE SIZE: /




ANGLE F



8W L 3000K




8W L 3000K




FEYA GLASS TRIMLESS


LED POWER: 6W
CRI: 90
SYSTEM POWER: 7.1W
OUTPUT: 446Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø60*143mm
HOLE SIZE: Ø55mm




ANGLE F



8W L 3000K



8W L 3000K







FLASH

FLASH is completely new concept idea of pendant lighting.
This elegant and sophisticated fitting is the best example of artistic and creative vision.
Ultra-thin line, suspended vertically or horizontally,
gives the best creative effect to any room, be it residential or public area.

IP20 220-240VAC




FLASH P SQ

CRI: 90
SYSTEM POWER: 23.3W
OUTPUT: 725Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: 1552*9*10.5mm
HOLE SIZE: /

L

325614A




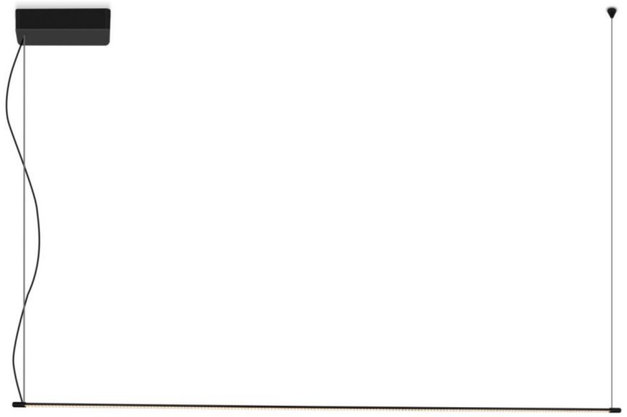


FLASH P

322119A

LED POWER:14.5W
CRI: 90
SYSTEM POWER:16.5W
OUTPUT: 291Lm/3000K
INPUT: 100-240VAC,50/60Hz





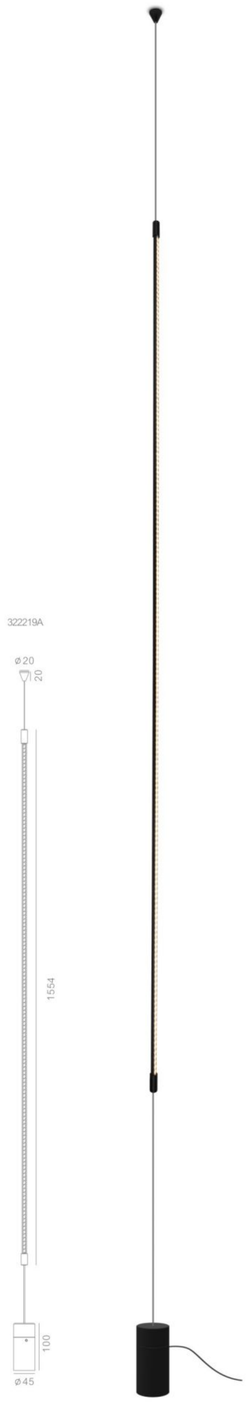

FLASH V

LED POWER:14.5W
CRI: 80
SYSTEM POWER:16.5W
OUTPUT: 291Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø13.4*1554mm
HOLE SIZE: /

L

COLOR FINISHINGS:

PAW PAB



FORMULIA 2.0

Minimalism, elegance and functionality are key words
to describe the new collection FORMULIA.
It was specially designed to meet multiple lighting requirements
for both residential and commercial spaces.
Elegant slim suspended tubes are going in different lengths
for choice: 350 mm, 550 mm, 750 mm.
All versions can be installed with mounting plate or trimless.
FORMULIA L chandelier was created to extend FORMULIA collection.
6 tubes are hung at different heights, providing organic atmosphere to any room.

CE IP20 220-240VAC





350 TRIMLESS

550 TRIMLESS

750 TRIMLESS



FORMULIA L 350 GROUP



FORMULIA L 550 GROUP



FORMULIA L 750 GROUP









FORMULIA 350 / 550 / 750


LED POWER: 6W
CRI: 90
SYSTEM POWER: 8W
OUTPUT: 379Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø25*350mm
Ø25*550mm
Ø25*750mm
HOLE SIZE: /

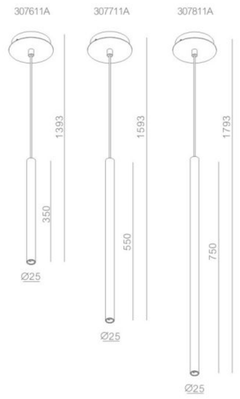


ANGLE 19°



6W 20° 3000K




6W 20° 3000K




FORMULIA 350 TRIMLESS / 550 TRIMLESS / 750 TRIMLESS


LED POWER: 6W
CRI: 90
SYSTEM POWER: 8W
OUTPUT: 379Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø25*350mm
Ø25*550mm
Ø25*750mm
HOLE SIZE: Ø55mm

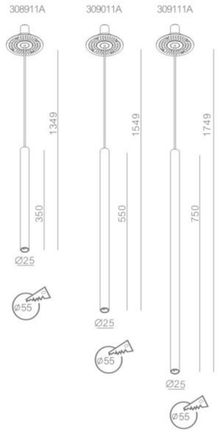


ANGLE 19°



6W 19° 3000K




6W 19° 3000K



FORMULIA L 350 GROUP


LED POWER: 2.2W*6
CRI: 90
SYSTEM POWER: 15W
OUTPUT: 948Lm/3000K
INPUT: 220-240VAC,50/60H
DIMENSION: Ø25*350*Ø395mm
HOLE SIZE: /




ANGLE 11°



2.2W 11° 3000K




2.2W 11° 3000K




FORMULIA L 550 GROUP


LED POWER: 2.2W*6
CRI: 90
SYSTEM POWER: 15W
OUTPUT: 948Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø25*550*Ø395mm
HOLE SIZE: /




ANGLE 11°



2.2W 11° 3000K




2.2W 11° 3000K




FORMULIA L 750 GROUP


LED POWER: 2.2W*6
CRI: 90
SYSTEM POWER: 15W
OUTPUT: 948Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø25*750*Ø395mm
HOLE SIZE: /




ANGLE 11°



2.2W 11° 3000K



2.2W 11° 3000K





P 9



P 6



P 3

LOOP

Super unique collection, slim black rings,
floating through the space, providing star sky effect on the ceiling.
The circle of LEDs specially designed to guarantee a uniform
and balanced areole form light effect.
LOOP is available in recessed and suspended versions in 3 dimensions.
Recessed version is equipped with magnet mechanism
for LED source special fixation.

IP20 220-240VAC DIM TRIAC



LOOP P 3

LED POWER:3*6.4W
CRI: 90
SYSTEM POWER:22.5W
OUTPUT: 1422Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø700mm
HOLE SIZE: /



OPTICS:



RECOMMEND



DIM TRIAC
304719EDT

LOOP P 6

LED POWER:6*6.4W
CRI: 90
SYSTEM POWER:45W
OUTPUT: 2844Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø1200mm
HOLE SIZE: /



OPTICS:



RECOMMEND



DIM TRIAC
304819EDT

LOOP P 9

LED POWER:9*6.4W
CRI: 90
SYSTEM POWER:67.5W
OUTPUT: 4266Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø1700mm
HOLE SIZE: /



OPTICS:



RECOMMEND



DIM TRIAC
304919EDT

LOTEL

Simple and elegant LOTEL collection comes
in different length, but they all have one thing in common: thin tubular shape.
LOTEL can be used single
or accompanied by other cylinder to make it directional.
To complete LOTEL range, wall mounted and suspended versions are available.


CE IP20 220-240VAC DIM TRIAC



P 225


P150

P 300

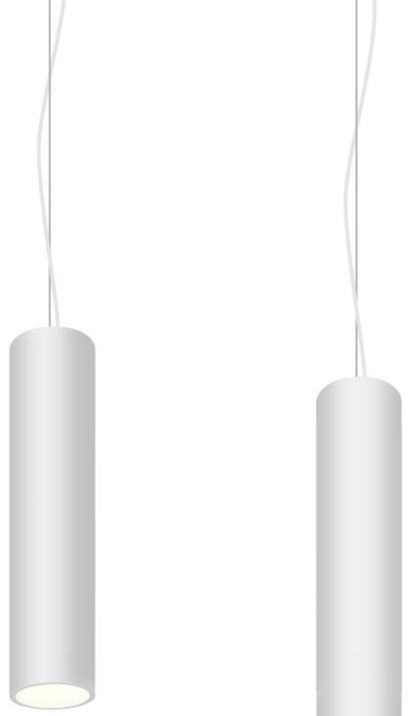

P 400

P 600

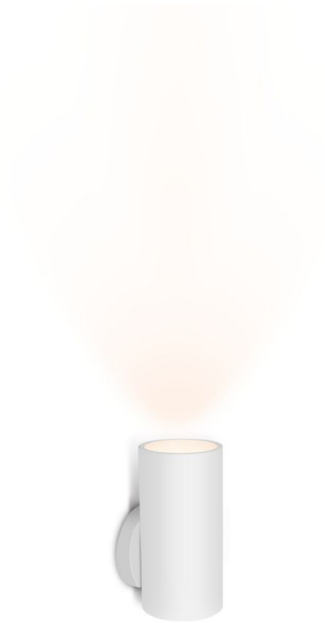

W




LOTEL




INTERIOR WALL SURFACE

LOTEL P150/ P225 / P300 / P400 / P600

LED POWER: 10.5W
CRI: 90
SYSTEM POWER: 12.4W
OUTPUT: 810Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø86*150mmØ86*225mmØ86*300mm
Ø86*400mmØ86*600mm
HOLE SIZE: /

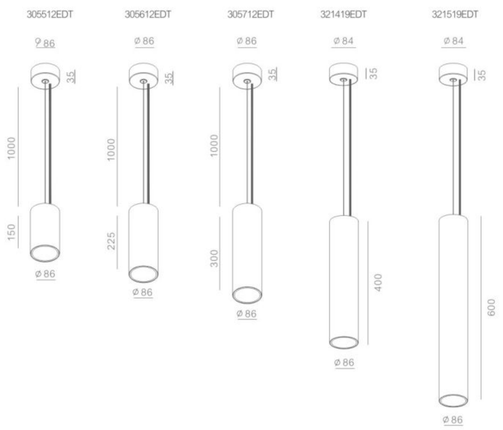


ANGLE 32°



10.5W 32° 3000K

10.5W 32° 3000K



OPTICS:



RECOMMEND




DIM TRIAC 305512EDT
DIM TRIAC 305612EDT
DIM TRIAC 305712EDT
DIM TRIAC 321419EDT
DIM TRIAC 321519EDT

LOTEL W

LED POWER: 10.5W
LED OUTPUT: 1308Lm/3000K
SYSTEM POWER: 12.4W
SYSTEM OUTPUT: 810Lm/3000K
INPUT: 220-240VAC,50/60Hz
CRI: 90
DIMENSION: Ø86*150mm
HOLE SIZE: /




ANGLE 32°



10.5W 32° 3000K

10.5W 32° 3000K



OPTICS:



RECOMMEND




DIM TRIAC 418912EDT

MIA

MIA was specially designed to extend various range of FLUA suspended lamps.
Unique conical shape of the tube provides additional
decorative element to the whole design concept.
MIA is recommended to be used in a combination to get the best
lighting and decorative effect.
Both trimless and surfaced mounted versions are available.
MIA GROUP, stylish chandelier with 6 suspended lamps,
is perfect addition to extend MIA concept.

IP20 220-240VAC

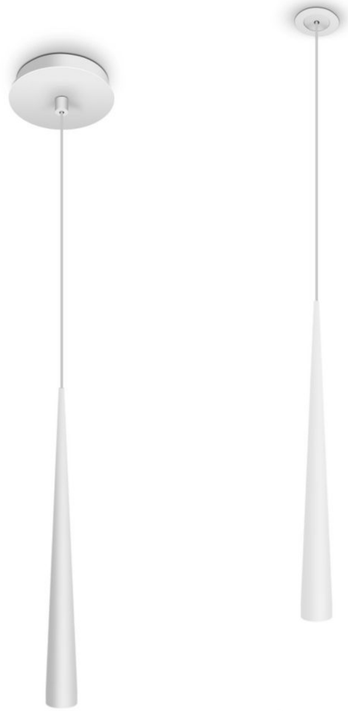

S TRIMLESS

S



GROUP





MIA S


LED POWER: 6W
CRI: 90
SYSTEM POWER: 7.1W
OUTPUT: 446Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø40*401mm
HOLE SIZE: /




ANGLE 20°



6W 20° 3000K




6W 20° 3000K



MIA S TRIMLESS


LED POWER: 6W
CRI: 90
SYSTEM POWER: 7.1W
OUTPUT: 446Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø40*401mm
HOLE SIZE: Ø55mm




ANGLE 20°



6W 20° 3000K



6W 20° 3000K




MIA GROUP


LED POWER: 6*2.2W
CRI: 90
SYSTEM POWER: 15W
OUTPUT: 948Lm/3000K
INPUT: 220-240VAC,50/60H
DIMENSION: Ø40*401*Ø395mm
HOLE SIZE: /




ANGLE 11°



2.2W 11° 3000K



2.2W 11° 3000K



PALLAS

PALLAS is a new collection of suspended lamps,
presented with three different designs of lamp for choice.
All three versions can be installed with the ceiling installation plate or trimless.
PALLAS W series' concept makes it possible to create unique patterns in the room,
breaking the spaces from the wall to the ceiling, visually enhancing the space.

CE IP20 220-240VAC




FUNNEL FUNNEL TRIMLESS

PALLAS FUNNEL
PALLAS FUNNEL TRIMLESS


LED POWER: 6W
CRI: 90
SYSTEM POWER: 7.1W
OUTPUT: 446Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø91.6*68mm
HOLE SIZE: Ø55mm

19°





EGG EGG TRIMLESS

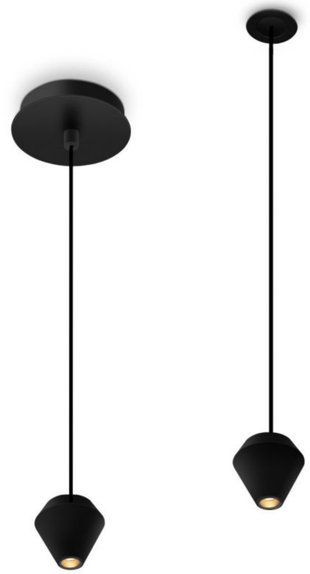


DIAMOND DIAMOND TRIMLESS

PALLAS EGG
PALLAS EGG TRIMLESS

LED POWER: 6W
CRI: 90
SYSTEM POWER: 7.1W
OUTPUT: 446Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø60*78mm
HOLE SIZE: Ø55mm

20°



PALLAS DIAMOND
PALLAS DIAMOND TRIMLESS

LED POWER: 6W
CRI: 90
SYSTEM POWER: 7.1W
OUTPUT: 446Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø73*68mm
HOLE SIZE: Ø55mm

20°









L1


L2

L3

PROMEO

Simple and elegant PROMEO
has already become classic collection of FLUA suspended range.
This splendid slim fitting is the best choice for both residential and commercial spaces.
Small lighting ring around the cylinder gives additional
decorative element to the whole design concept.
12º beam angle provides special lighting effect emphasizing separately objects in the room.
3 sizes are available.


CE IP20 100-240VAC

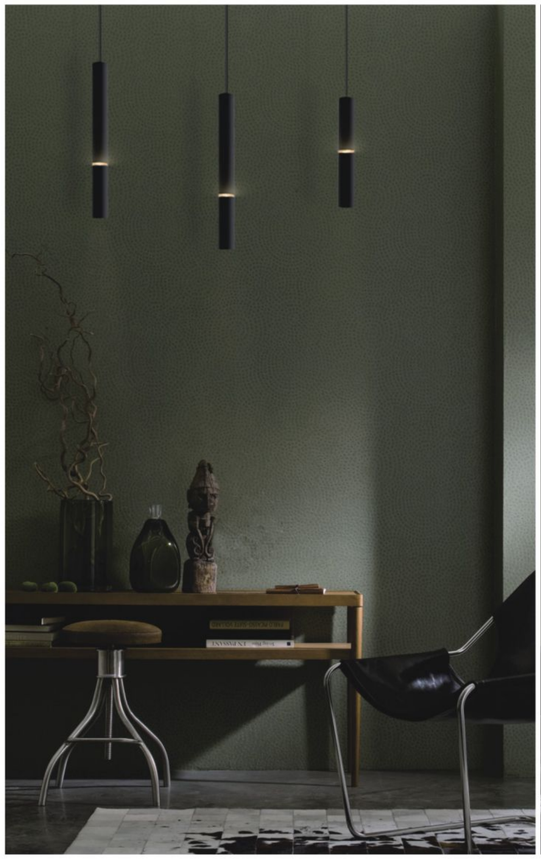




PROMEO L1 / L2 / L3


LED POWER:2.2W
CRI: 80
SYSTEM POWER:4.2W
OUTPUT: 28Lm/3000K
INPUT:100-240VAC,50/60Hz
DIMENSION: Ø32*203mm
Ø32*303mm
Ø32*403mm
HOLE SIZE: /




ANGLE 12°



2.2W 12° 3000K



2.2W 12° 3000K





WAVE H S 30 DN



WAVE H L 30 DN

WAVE


FLUA presents new design for the pendant lights,
WAVE, with 2 options to choose: horizontal and vertical.
Vertical range is possible with downwards focused light providing general ambient light effect and up-light, providing indirect illumination.
Wave vertical collection is available in serval sizes depending on the length and the number of the light sticks.
WAVE with its unique minimalist design is the best choice both for living areas and public zones.

IP20 100-240VAC DIM 1-10V



WAVE V S 20 UP

WAVE

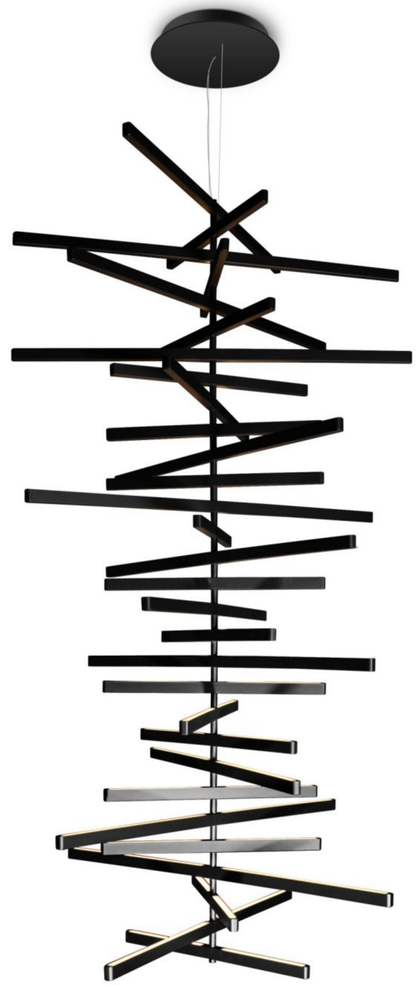

WAVE V LS 30 UP




WAVE V L 30 UP

WAVE V S 10 DN / V LS 10 DN / V L 10 DN






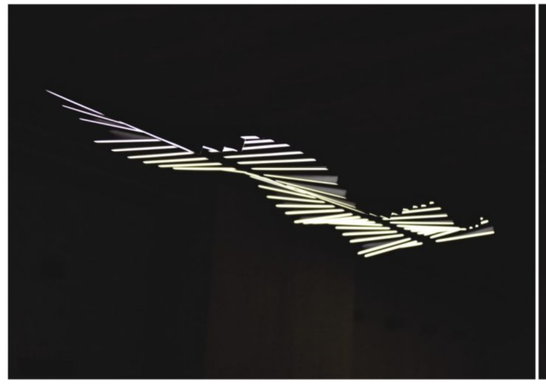







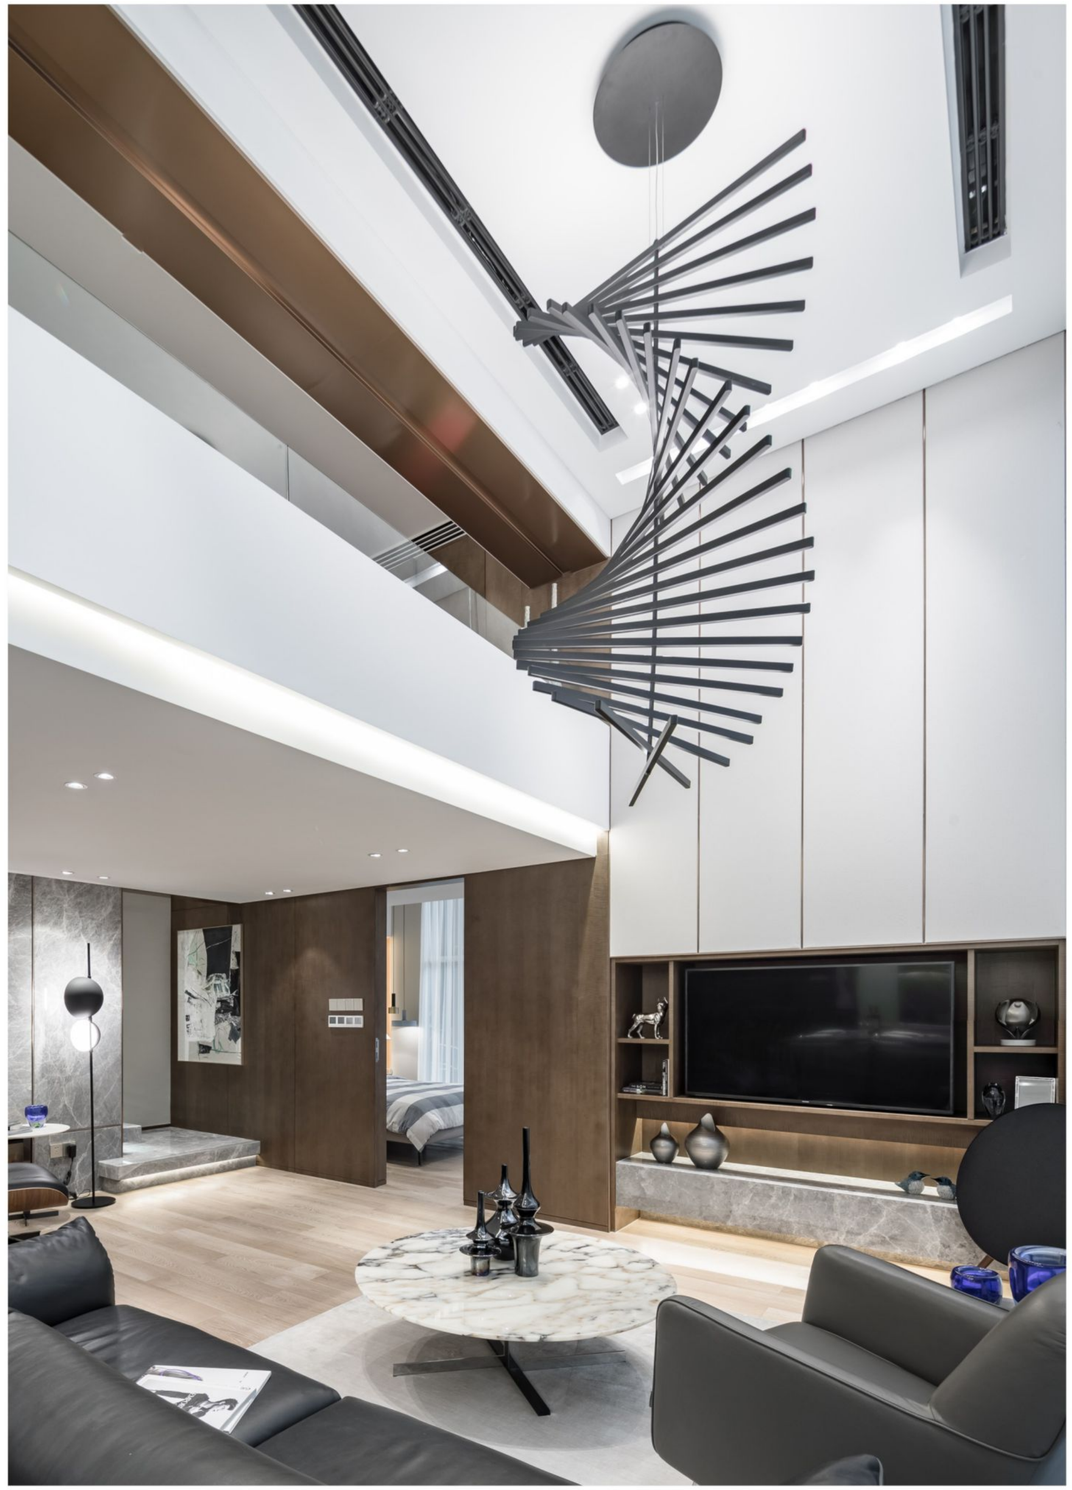



WAVE H L 10 DN


LED POWER: 50W
CRI: 80
SYSTEM POWER: 63W
OUTPUT: 2770Lm/3000K
INPUT: 90-305VAC,50/60Hz
DIMENSION: 468*870*26mm
HOLE SIZE: /mm

L

RECOMMEND

DIM 1-10V
323319DX

323319DX



WAVE H SL 10 DN


LED POWER: 37.5W
CRI: 80
SYSTEM POWER: 43W
OUTPUT: 2062Lm/3000K
INPUT: 90-305VAC,50/60Hz
DIMENSION: 870*468*26mm
HOLE SIZE: /

L

RECOMMEND

DIM 1-10V
323619DX

323619DX



WAVE H L 20 DN


LED POWER: 100W
CRI: 80
SYSTEM POWER: 111W
OUTPUT: 5500Lm/3000K
INPUT: 90-305VAC,50/60Hz
DIMENSION: 933*870*26mm
HOLE SIZE: /

L

RECOMMEND

DIM 1-10V
323419DX

323419DX



WAVE H SL 20 DN


LED POWER: 75W
CRI: 80
SYSTEM POWER: 83W
OUTPUT: 4150Lm/3000K
INPUT: 90-305VAC,50/60Hz
DIMENSION: 933*870*26mm
HOLE SIZE: /

L

RECOMMEND

DIM 1-10V
323719DX

323719DX



WAVE H L 30 DN


LED POWER: 150W
CRI: 80
SYSTEM POWER: 163W
OUTPUT: 8250Lm/3000K
INPUT: 90-305VAC,50/60Hz
DIMENSION: 1453*870*26mm
HOLE SIZE: /

L

RECOMMEND

DIM 1-10V
323519DX

323519DX



WAVE H SL 30 DN


LED POWER: 112.5W
CRI: 80
SYSTEM POWER: 126W
OUTPUT: 6188Lm/3000K
INPUT: 90-305VAC,50/60Hz
DIMENSION: 1453*870*26mm
HOLE SIZE: /

L

RECOMMEND

DIM 1-10V
323819DX

323819DX




WAVE H S 30 DN

LED POWER:74.7W
CRI: 80
SYSTEM POWER:83W
OUTPUT: 4150Lm/3000K
INPUT: 90-305VAC,50/60Hz
DIMENSION: 1453*25*472mm
HOLE SIZE:/

L

RECOMMEND

DIM 1-10V
305819DX




WAVE H S 30 DN ALU

LED POWER:74.7W
CRI: 80
SYSTEM POWER:83W
OUTPUT: 4150Lm/3000K
INPUT: 90-305VAC,50/60Hz
DIMENSION: 1453*25*472mm
HOLE SIZE:/

L

RECOMMEND

DIM 1-10V
304113DX




WAVE V LS 30 UP

LED POWER:112.5W
CRI: 80
SYSTEM POWER:126W
OUTPUT: 6187.5Lm/3000K
INPUT: 90-305VAC,50/60Hz
DIMENSION: 870*1622*20mm
HOLE SIZE:/

L

RECOMMEND

DIM 1-10V
309819DX




WAVE V S 20 UP

LED POWER:50W
CRI: 80
SYSTEM POWER:56W
OUTPUT: 2770Lm/3000K
INPUT: 90-305VAC,50/60Hz
DIMENSION: 472*1080*20mm
HOLE SIZE:/

L

RECOMMEND

DIM 1-10V
310319DX




WAVE V S 10 DN

LED POWER:25W
CRI: 80
SYSTEM POWER:29W
OUTPUT: 1380Lm/3000K
INPUT: 90-305VAC,50/60Hz
DIMENSION: 472*525*20mm
HOLE SIZE:/

L

RECOMMEND

DIM 1-10V
311019DX




WAVE V L 30 UP

LED POWER:150W
CRI: 80
SYSTEM POWER:163W
OUTPUT: 8250Lm/3000K
INPUT: 90-305VAC,50/60Hz
DIMENSION: 870*1622*20mm
HOLE SIZE:/

L

RECOMMEND

DIM 1-10V
310119DX



WAVE H S 10 DN



WAVE H S 20 DN



WAVE H S 30 DN



WAVE V S 10 UP



WAVE V LS 10 UP



WAVE V L 10 UP



WAVE V S 20 UP



WAVE V LS 20 UP



WAVE V L 20 UP



WAVE V S 30 UP



WAVE V LS 30 UP



WAVE V L 30 UP



WAVE V S 10 DN / V LS 10 DN / V L 10 DN



BEAUTIFICATION


ADRAY SQ SINGLE
192



ADRAY RO SINGLE
192


ADRAY SQ DOUBLE
192


ADRAY SQ DOUBLE
192


ASTRA SINGLE
194


ASTRA DOUBLE
194


AUREOLE
198


NEW
BALANCE
200


BEATTY
204


BEL SINGLE
208


BEL DOUBLE
208


BEND H 150
212


BEND H 300
213


BEND H 600
216


BOW
217

BOWLING
90


COLA IN
222


COLA ON
222



CUBO R
226


CUBO L
226


CURES LONG
229


CURES ROUND
229



DREAM
234


ELF
235


FISHING W
238


FLOD O ROUND
242


FLOD O SQUARED
242


FLOD I ROUND
242


FLOD I SQUARED
242


GEMO ROUND
245



GEMO SQUARED
245


HEMLINE
249


KARINA RS
252


KARINA RM
253


KARINA RHOMBUS
253


KARINA ST
254

KARINA SO
254

KUBIK WALL
258

LIGHTBAR ONE
260

LIGHTBAR TWIST
260

LIRA W
264

LIRA W2 R
265


LIRA W2 L
265


LIRA W3 R
266


LIRA W3 L
266

LOTEL W
156

LUXURY SINGLE
274

LUXURY DOUBLE
274

MIRO 300
279

MIRO 550
280

MOON
284

SET
286

SHELL ROUND
288

SHELL SQUARE
288

SINE S
290

SINE S DOUBLE
290

SONG C
292

SONG D
292

SONG E
292

TV
296

WALL LINE 2.0 S 280
298

WALL LINE 2.0 S 530
298

WALL LINE 2.0 S 1030
298

WALL LINE 2.0 S 2030
298

WALL LINE 2.0 S3030
298

WALL LINE 2.0 D 280
299

WALL LINE 2.0 D 530
299

WALL LINE 2.0 D 1030
299

WALL LINE 2.0 D 2030
299

WALL LINE 2.0 D 3030
299

WING
302

WWW.FLUA.COM

PERFORM YOUR LIGHT

ADRAY

A new eye catcher ADRAY is a great example of simplicity, elegance and creativity.
Thanks to its structure, ADRAY can change light beam angle from 0 ° to 90 °. It is ideal for playful effect in both residential and public areas. 2 versions, r
ound and square, are available for choice, both are going with single or double lamps.

IP20 100/220-240VAC




SQ SINGLE




SQ DOUBLE



RO SINGLE



RO DOUBLE

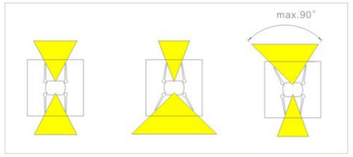


ADRAY SQ SINGLE / RO SINGLE

LED POWER: 6.8W
CRI: 80
SYSTEM POWER: 7.7W
OUTPUT: 379Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: 90*90*90mm
Ø120*90mm
HOLE SIZE: /


A

418319A



418419A



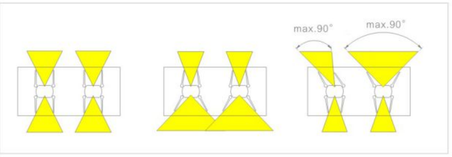


ADRAY SQ DOUBLE / RO DOUBLE


LED POWER: 13.6W
CRI: 80
SYSTEM POWER: 14.3W
OUTPUT: 1016Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 190*90*90mm
273.6*90*90mm
HOLE SIZE: /

A

418519A



418619A



COLOR FINISHINGS:

PAB PAW

ASTRA

Thanks to its simple, and at the same time, elegant appearance,
ASTRA has become the best choice for both residential and public spaces.
4 ° beam angle gives special light performance. ASTRA is a splendid wall lamp,
available in two sizes. Smaller version is providing up light,
while longer version is available with up and down light direction.

IP20 220-240VAC



SINGLE



DOUBLE

ASTRA SINGLE

426317A



LED POWER: 2.2W
LED OUTPUT: 199Lm/3000K
SYSTEM POWER: 4W
SYSTEM OUTPUT: 164Lm
INPUT: 220-240VAC,50/60Hz
CRI: 90
DIMENSION: Ø49*75*57mm
HOLE SIZE: /


ASTRA DOUBLE

426427A




LED POWER: 4.4W
LED OUTPUT: 199Lm/3000K
SYSTEM POWER: 5W
SYSTEM OUTPUT: 328Lm
INPUT: 220-240VAC,50/60Hz
CRI: 90
DIMENSION: Ø49*150*57mm
HOLE SIZE: /


ANGLE 4°



2.2W 4° 3000K

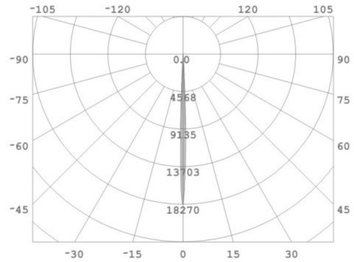

2.2W 4° 3000K





ASTRA





AUREOLE

The AUREOLE is a wall fixture with its 355° routable function is the best choice for auxiliary lighting for both private and public places.
It's indirect light creates unforgettable patterns on the wall.


CE IP20 220-240VAC

431619A

AUREOLE


LED POWER:6.5W
CRI: 90
SYSTEM POWER:6.5W
OUTPUT: 216Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø178*47.5mm
HOLE SIZE: /

L



COLOR FINISHINGS:

PAB PAW

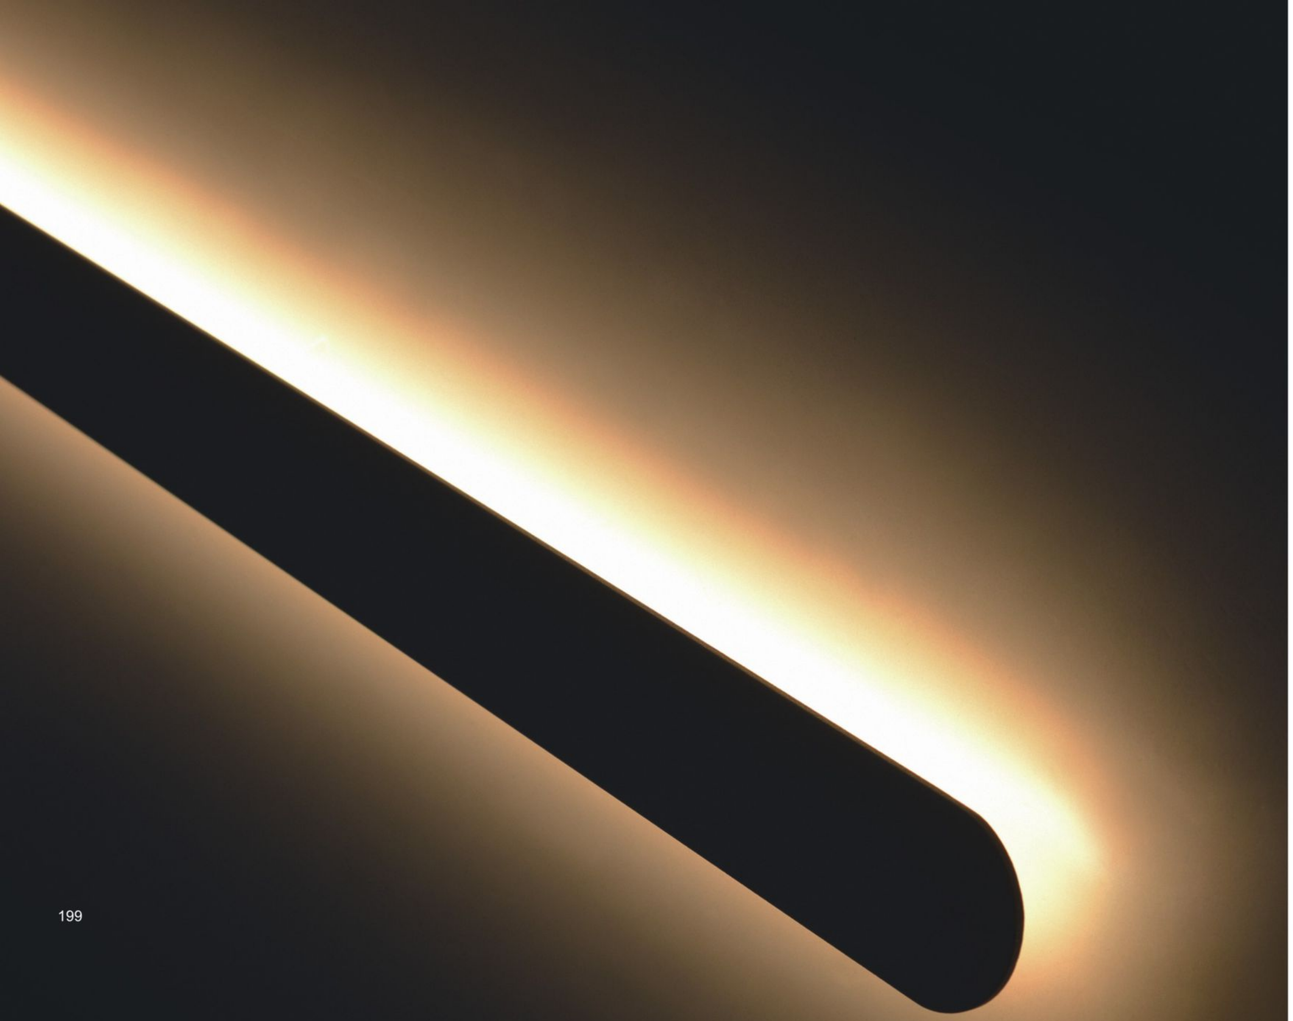

BALANCE

With its slim and long shape, with soft light emitting — BALANCE is a great solution for living rooms, restaurants, lobby zones etc.
Combination of several pieces will create unique patterns suitable for any modern and creative space.

CE IP20 220-240VAC


BALANCE

BALANCE

LED POWER: 32.4W
CRI: 90
SYSTEM POWER: 36W
OUTPUT:1843 Lm/3000K
INPUT: 220-240VAC
DIMENSION: 1800*52.5*45mm
HOLE SIZE: /


L

433414A

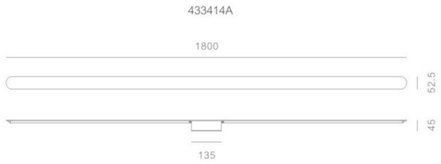

COLOR FINISHINGS:

PAB PAW

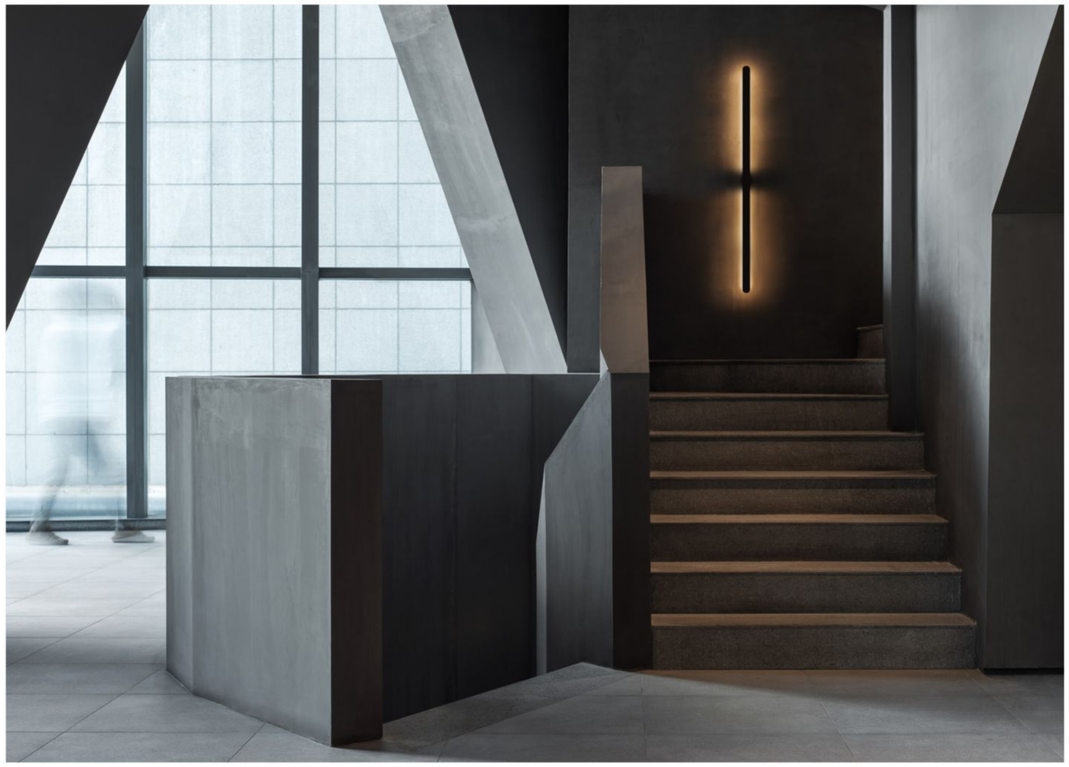



BALANCE



BEATTY

Playing with light and shadow on the wall, BEATTY performs unforgettable lighting effect.
The elegant semi sphere design alongside with beautiful light performance making
BEATTY more and more popular among designers and architectures.

BEATTY is a wall mounted downlight that
could be used both for indoor and outdoor application,
thanks to its IP 65.

IP65 220-240VAC




BEATTY

LED POWER: 8.3W
CRI: 80
SYSTEM POWER: 10W
OUTPUT: 552Lm/2700K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 174*149*62mm
HOLE SIZE: /

L

423314A




COLOR FINISHINGS:



PAB PAW





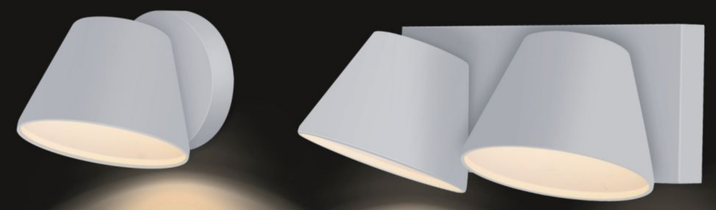


BEL

This splendid wall lamp is the best choice for bed side lighting.
Classic bell-shaped lamp creates vintage atmosphere in a bed room.
Thanks to its ratable 350° function, BEL can be easily adjusted however need.
BEL is available in 2 versions: single and double. DIM function is included.

IP20 220-240VAC DIM TRIAC



SINGLE



DOUBLE

COLOR FINISHINGS:



PAW



PAB



BEL SINGLE

LED POWER:5W/AC Module
CRI: 80
SYSTEM POWER:5W
OUTPUT: 138Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 80*74.6*93mm
HOLE SIZE: /

421314DT



L


RECOMMEND

DIM TRIAC
421314DT

BEL DOUBLE

LED POWER:10W/AC Module
CRI: 80
SYSTEM POWER:10W
OUTPUT: 276Lm/3000K
INPUT: 220V-240VAC,50/60Hz
DIMENSION: 170*93*67mm
HOLE SIZE: /


421424DT



L

RECOMMEND

DIM TRIAC
421424DT

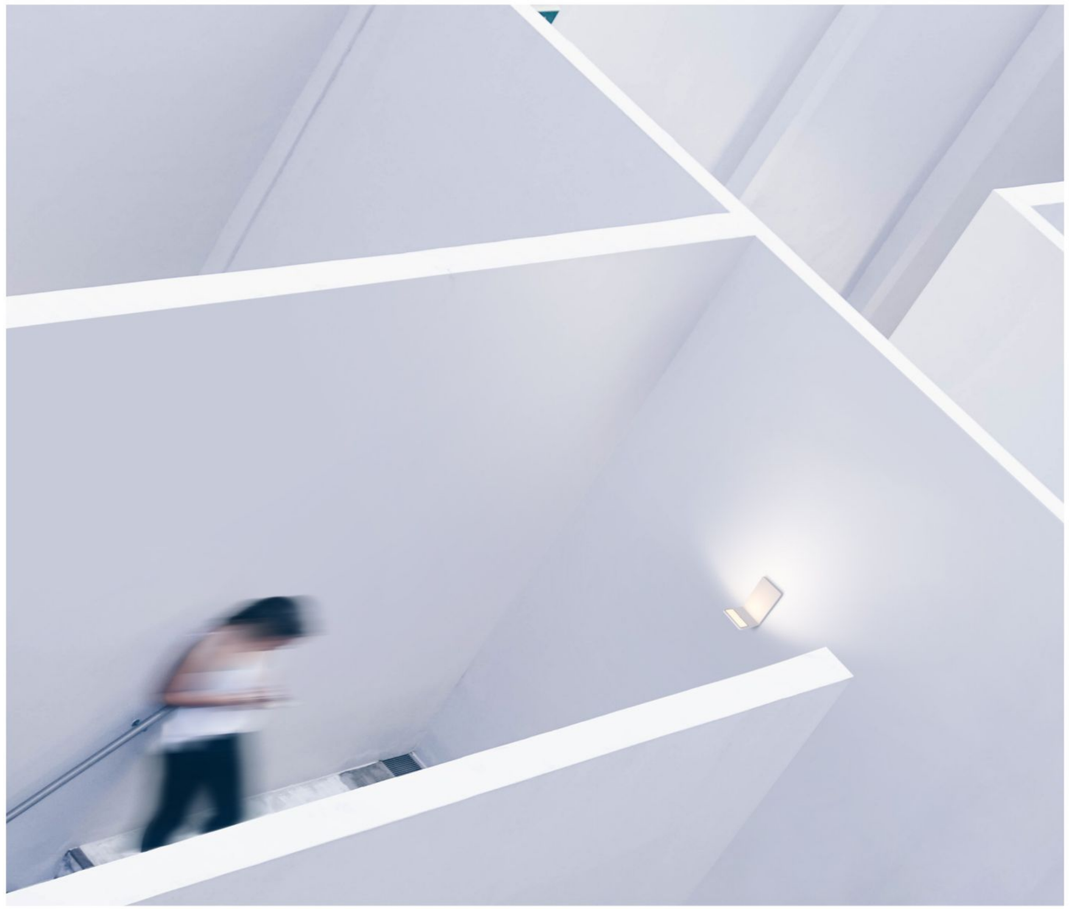



H 150

BEND

Sharp lines of BEND are specially created to impress by its sophisticated, dynamic design. Perfect combination of simplicity and contemporary look can easily brighten up your days.

The plexiglass top cover hides a series of power LEDs, delivering a diffuse harmonious light.

IP20 220-240VAC

428814A

BEND H 150

LED POWER:3.2W
CRI: 90
SYSTEM POWER:4.1W
OUTPUT:225Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 150*180*112mm
HOLE SIZE: /



L




H 300

BEND H 300

LED POWER:5.2W
CRI: 90
SYSTEM POWER:6.8W
OUTPUT:428Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 300*120*112mm
HOLE SIZE: /


L

426014A







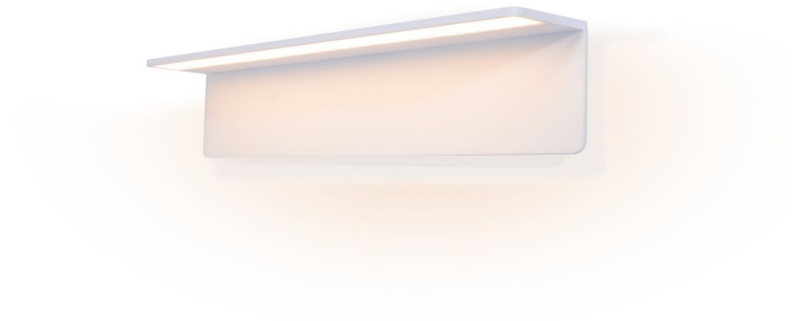


H 600

BEND H 600

LED POWER:10.5W
CRI: 90
SYSTEM POWER:12.7W
OUTPUT: 828Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 600*112*120mm
HOLE SIZE: /

L





BOW

Small elegant tubular shapes BOW has already
become classic range of wall mounted collection of FLUA.
This splendid fitting consists of two cylinders: one is fixed on the wall while the other can be adjusted.
Both single use or installed in group BOW creates perfect light effect on the wall.
Thanks to variety of color combinations,
BOW can match any design of the room. Recommended
both for residential and public spaces.

CE IP20 100-240VAC



COLOR FINISHINGS:



PAW



PAB



PAW - WSG



PAB - WGL







BOW

LED POWER: 2*3.66W
LED OUTPUT: 445Lm/3000K
SYSTEM POWER: 8.6W
SYSTEM OUTPUT: 762Lm
INPUT: 100-240VAC,50/60Hz
CRI: 90
DIMENSION: Ø80*234mm
HOLE SIZE: /


425019EA




3.6W 40° 3000K



3.6W 40° 3000K



3.6W 40° 3000K



OPTICS:



18° 22°

COAL

This miniature fixture provides perfect light effect
for the wall, could be used for focusing on special objects on the shelves.
Recessed and surface mounted versions
are available.

IP20 100/220-240VAC

COAL



IN



ON






COAL IN □

LED POWER: 1.1W
LED OUTPUT: 100Lm/3000K
SYSTEM POWER: 2.1W
SYSTEM OUTPUT: 75Lm
INPUT: 100-240VAC,50/60Hz
CRI: 80
DIMENSION: Ø28*43mm
HOLE SIZE: /


134611A



COAL IN □

LED POWER: 2.2W
LED OUTPUT: 168Lm/3000K
SYSTEM POWER: 4W
SYSTEM OUTPUT: 157Lm
INPUT: 220-240VAC 50/60Hz
CRI: 80
DIMENSION: Ø28*43mm
HOLE SIZE: /


192711A



COAL ON □

LED POWER: 1.1W
LED OUTPUT: 100Lm/3000K
SYSTEM POWER: 2.1W
SYSTEM OUTPUT: 75Lm
INPUT: 100-240VAC,50/60Hz
CRI: 80
DIMENSION: Ø28*30mm
HOLE SIZE: /


405511A




COAL ON □

LED POWER: 2.2W
LED OUTPUT: 168Lm/3000K
SYSTEM POWER: 4W
SYSTEM OUTPUT: 157Lm
INPUT: 220-240VAC 50/60Hz
CRI: 80
DIMENSION: Ø28*30mm
HOLE SIZE: /


425611A




ANGLE 25°




ANGLE 25°




1.1W 25° 3000K




1.1W 25° 3000K



1.1W 25° 3000K



1.1W 25° 3000K



OPTICS:



OPTICS:



CUBO

CUBO is a new eye-catching architectural design,
a new step of lighting creation that erase the border between reality and abstraction.
CUBO with its 3D lighting performance bring us from dream to reality and back.
Sharp rectangular shape makes the light going according to the straight trajectory.
CUBO consists of two square lighting making mirror reflection from one to the other.
LED source and driver are integrated and hidden into the fitting.
CUBO is a great choice for residential areas, halls, hotels, office receptions.

IP20 220-240VAC





R




L

CUBO R/L


LED POWER: 6.3W
CRI: 80
SYSTEM POWER: 8W
OUTPUT: 393Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 254*254*54mm
HOLE SIZE: /

C


421914A



422014A





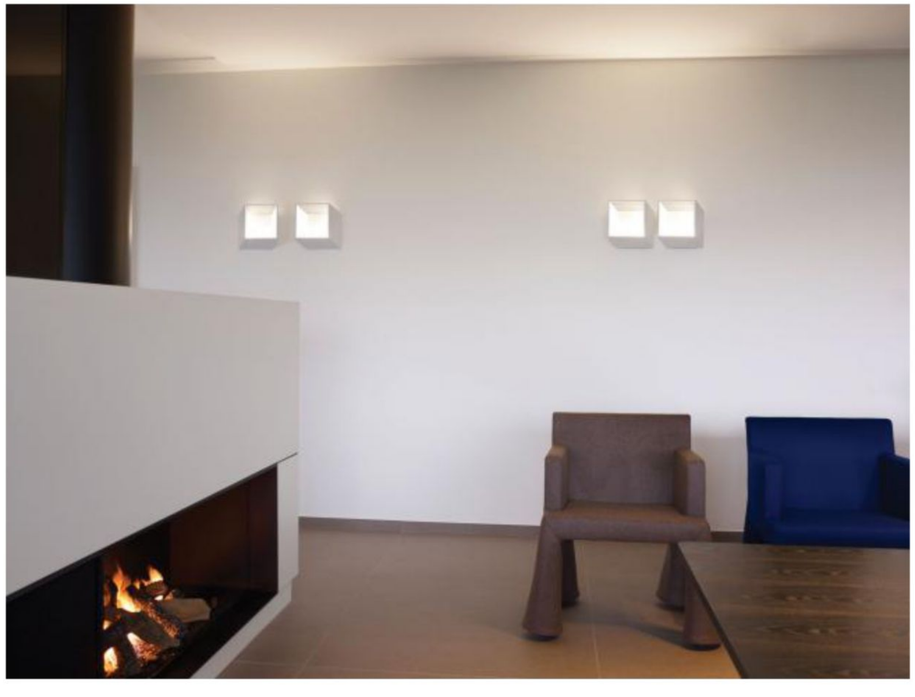







LONG

ROUND

CURES

Thin as paper with slightly curved side,
CURES is presented unique elegant design.
This splendid wall lamp is available in two versions,
CURES ROUND and CURES LONG.

IP20 100/220-240VAC






CURES ROUND

LED POWER:4W
CRI: 80
SYSTEM POWER:4.6W
OUTPUT: 192Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: 160*121.2*40.4mm
HOLE SIZE: /

L

416011A




CURES LONG

LED POWER:6.4W
CRI: 80
SYSTEM POWER:7.5W
OUTPUT: 414Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 250*94.89*54.11mm
HOLE SIZE: /

L

416119A



COLOR FINISHINGS:



PCS-PAW



PAW



DREAM

Lighting as an art, forms beautiful and unforgettable shapes and performances,
turned to become a DREAM.
DREAM is a new design concept of wall lighting,
with the shape that reminds slightly opened book, giving light from its core.
DREAM is the best choice for residential areas, offices, hotels.


IP20 100-240VAC

425914A

DREAM


LED POWER:6.4W
CRI: 80
SYSTEM POWER:7.3W
OUTPUT: 525Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: 230*75*55mm
HOLE SIZE: /

L







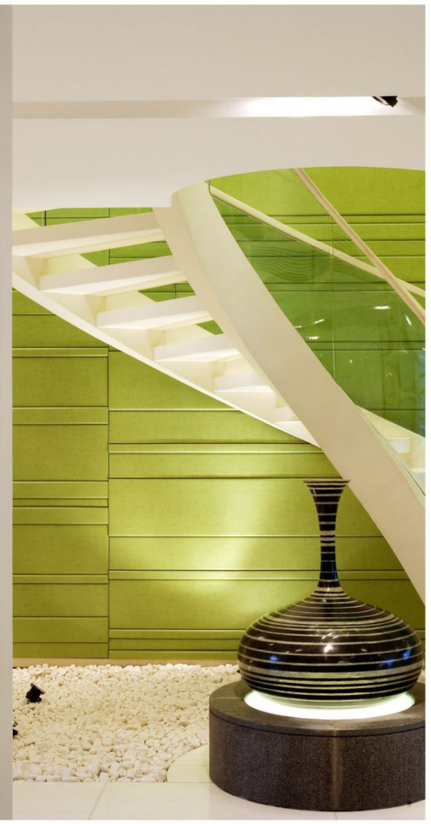

ELF

Best decorative effect is coming from pure simple forms and materials.
Pure transparent glass globe fixed on elegantly bended aluminum arm.
The light inside the glass creates unique lighting patterns in the room.
Be it residential or public spaces,
ELF is a great choice for wall lighting solution.

IP20 220-240VAC

428915A

ELF W

LED POWER:4.2W
CRI: 90
SYSTEM POWER:5.2W
OUTPUT: 233Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 150*229*192mm
HOLE SIZE: /

L



COLOR FINISHINGS:



PAW



PAB



FISHING

The new concept of lighting is the best example of creativity.
Transparant suspended globe gives additional enigmatic
atmosphere to any space be it private or public area.

IP20 100/220-240VAC DIM TOUCH




W

FISHING W

LED POWER: 4.2W
CRI: 90
SYSTEM POWER: 5.2W
OUTPUT: 233Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø150*1728mm
HOLE SIZE: /

L





F

FISHING F


LED POWER:15.7W
CRI: 93
SYSTEM POWER:17.5W
OUTPUT: 709Lm/3000K
INPUT: 100-240VAC
DIMENSION:Ø300*2800mm
HOLE SIZE: /

L

RECOMMEND

DIM TOUCH
433311

433311DT






FOLD

This splendid miniature wall mounted fitting
was specially designed to become an eye catcher model.
Thanks to its unique design,
FOLD can create enigmatic combinations on the wall playing with light and shades.
Special lens provides soft and clean light output.
There are no visible screws on the surface,
outer cover is fixed by magnetic mechanism and could be easily removed once necessary.

IP20 220-240VAC

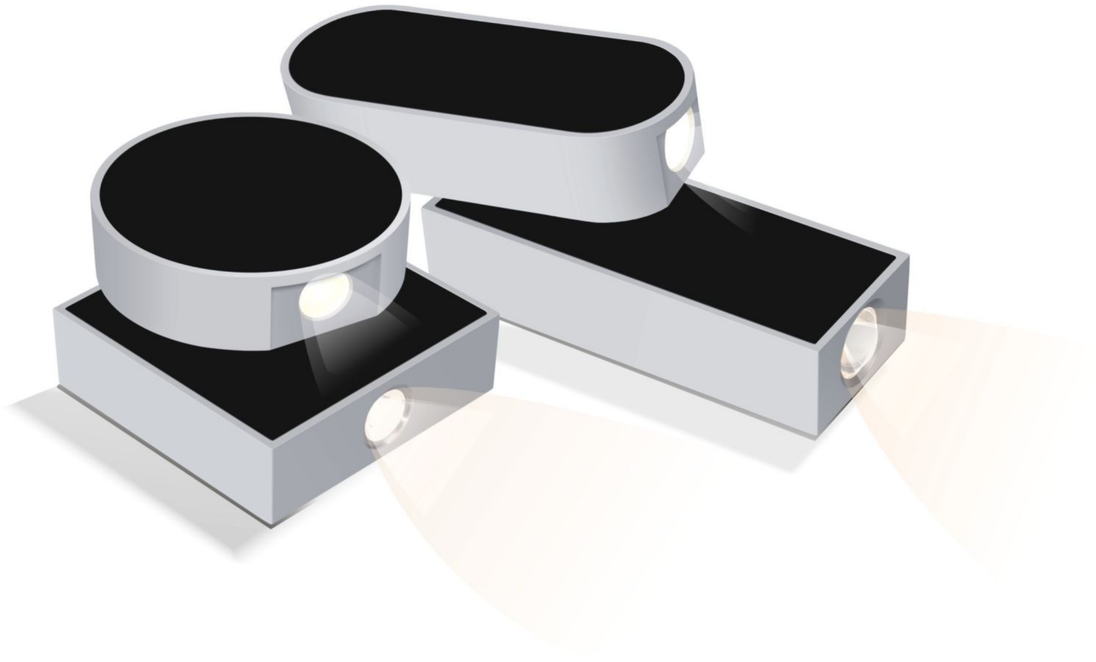





O ROUND




I ROUND



O SQUARED



I SQUARED

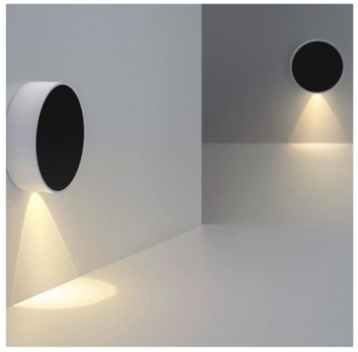






FOLD O ROUND/O SQUARED

408211A



408311A




LED POWER:2.2W
CRI: 80
SYSTEM POWER:4W
OUTPUT: 96Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø101*32mm
101*101*32mm
HOLE SIZE: /


ANGLE 35°



2.2W 35° 3000K




2.2W 35° 3000K




FOLD I ROUND/I SQUARED

408011A



408111A




LED POWER:2*2.2W
CRI: 80
SYSTEM POWER:8W
OUTPUT: 192Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 131*51*32mm
HOLE SIZE: /


ANGLE 35°



2.2W 35° 3000K



2.2W 35° 3000K





COLOR FINISHINGS:



PAW - PAB

PAB - PAW

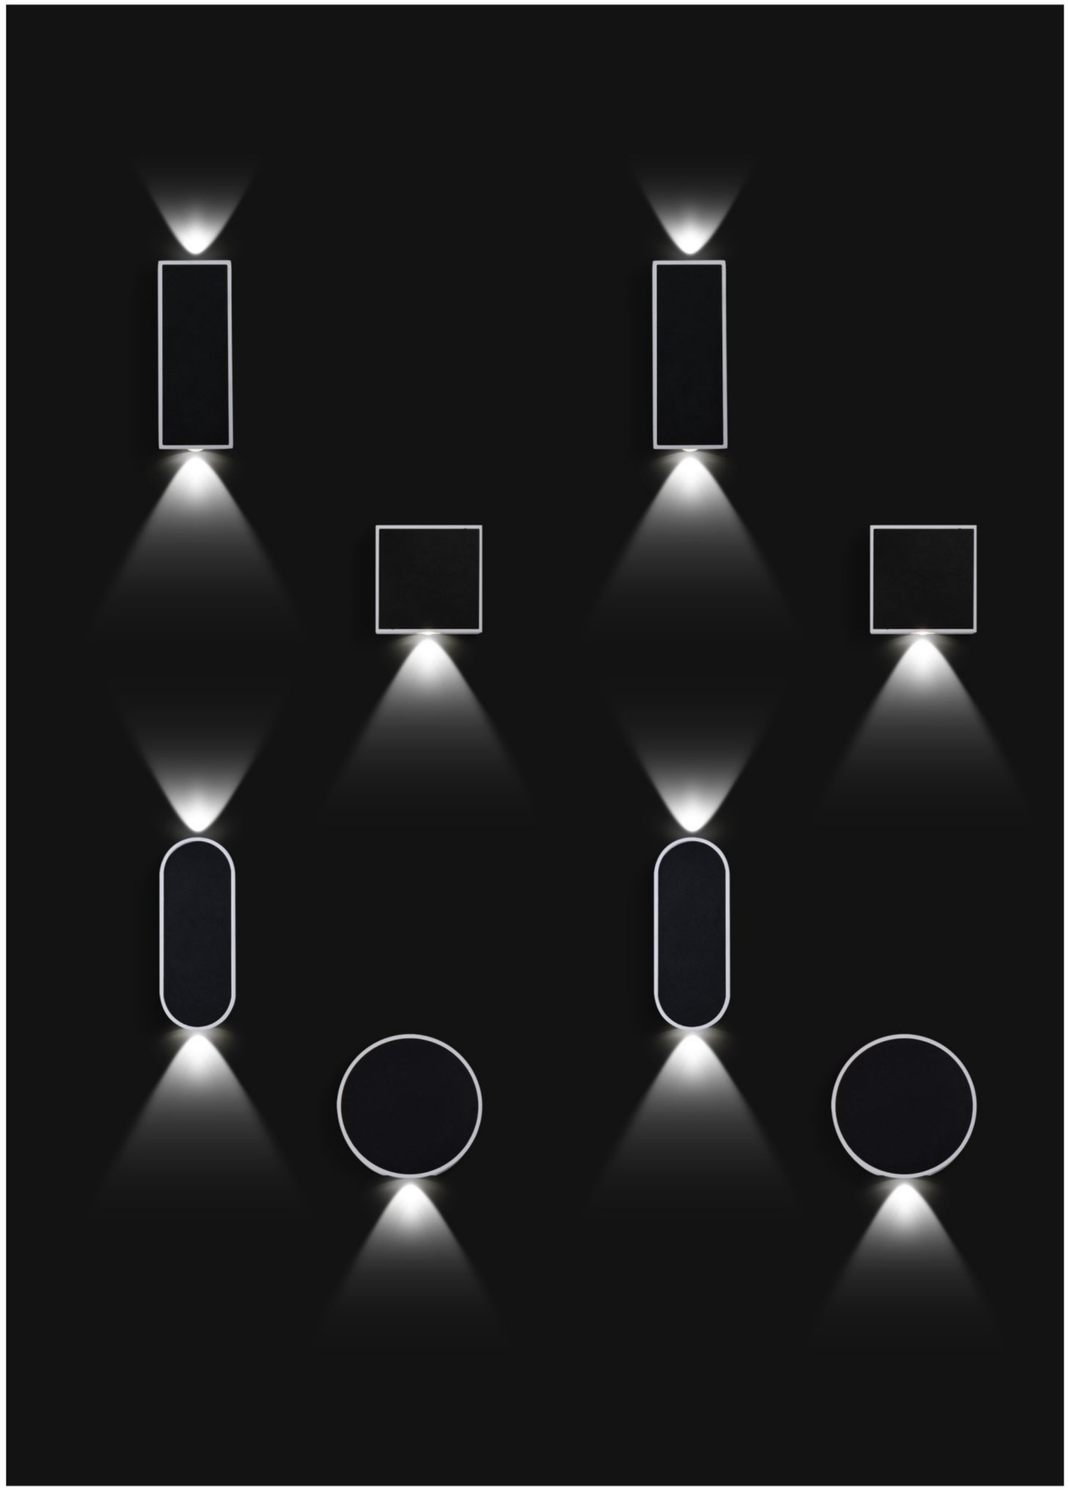

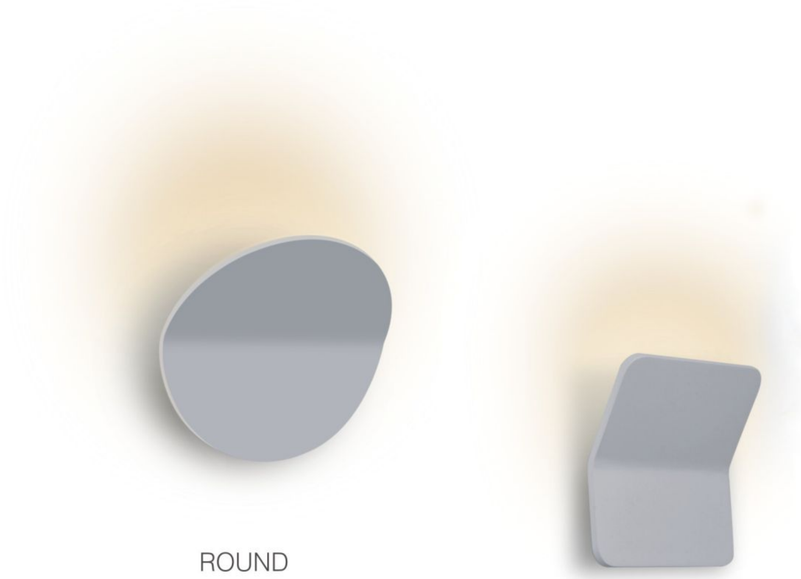

ROUND

SQUARED

GEMO

Simple elegant design of GEMO is making great decorative effect for the wall.
The indirect lighting is coming from inside of the fitting that is slightly bended in the middle.
GEMO can be perfectly integrated with almost any concept of interior design.
DIM function is included.

IP20 220-240VAC DIM TRIAC







COLOR FINISHINGS:



PAW



PCY



PAB



PCS

GEMO ROUND / SQUARED

LED POWER: 3.7W/AC Module
CRI: 80
SYSTEM POWER:3.7W
OUTPUT: 325Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø160*61mm
150*150*63mm
HOLE SIZE: /

L


RECOMMEND

DIM TRIAC
414415DT/414515DT


414415DT



414515DT





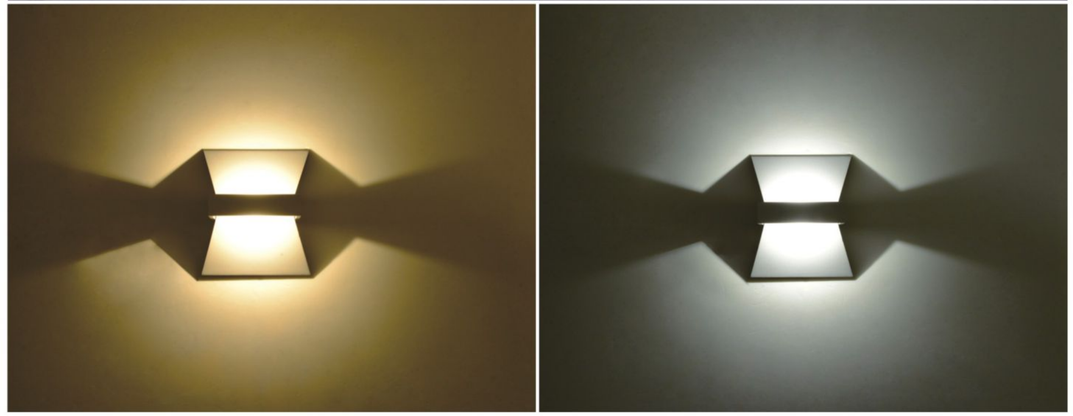

HEMLINE

HEMLINE is a great example of timeless design,
the art of light. Installed in a row one by one on the wall,
HEMLINE is creating enigmatic ornaments on the wall playing with light and shade.
It is a great choice for halls,
corridors and living rooms be it residential area or public space.


IP20 220-240VAC

420712EA

HEMLINE

LED POWER:6.7W
CRI: 80
SYSTEM POWER:8.4W
OUTPUT: 326Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 186*160*63mm
HOLE SIZE: /

L



KARINA

Special design of KARINA has already become one of FLUA classical collections.
Splendid aureole-shaped light is smoothly diffused on the wall around the lamp.
Aluminum cover fixed by special magnetic mechanism,
could be easily changed to create new patterns on the wall.
KARINA is available with different 4 designs and 2 sizes.
Combination of shapes, sizes and colors installed randomly on the wall,
can provide best decorative effect for any room.

IP20 100/220-240VAC

RS

KARINA RS

LED POWER: 2.2W
CRI: 90
SYSTEM POWER: 4W
OUTPUT: 248Lm/2700K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø125*38.5mm
HOLE SIZE: /



L


RM RHOMBUS

ST SO

KARINA RM

LED POWER: 6.4W
CRI: 90
SYSTEM POWER: 7.5W
OUTPUT: 525Lm/2700K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø250*52.5mm
HOLE SIZE: /

427914




L

KARINA RHOMBUS

LED POWER: 6.4W
CRI: 90
SYSTEM POWER: 7.5W
OUTPUT:480Lm/2700K
INPUT: 100-240VAC,50/60Hz
DIMENSION: 223.3*182.5*52.5mm
HOLE SIZE: /

427714




L


KARINA ST / SO

LED POWER: 6.4W
CRI: 90
SYSTEM POWER: 7.5W
OUTPUT: 544Lm/2700K
INPUT: 100-240VAC,50/60Hz
DIMENSION: 227*231.5*52.5mm
220*173*52.5mm
HOLE SIZE: /

427614



427814



L

KARINA





KUBIK

Pure geometry with sharp-edged cube form makes KUBIK remarkable and unique collection. In the KUBIK range you can choose between recessed or surface mounted versions, single or multiple light sources.
Each of them are available in wide range of color combinations.
Wall mounted version is a good addition to KUBIK design concept.
KUBIK ON has IP54 rate.

IP20 220-240VAC DIM TRIAC




WALL


KUBIK WALL

LED POWER: 15.47W
LED OUTPUT: 1758Lm/3000K
SYSTEM POWER: 18.3W
SYSTEM OUTPUT: 1087Lm/3000K
INPUT: 220-240VAC,50/60Hz
CRI: 90
DIMENSION: 119*91*77mm
HOLE SIZE: /


416212EDT




ANGLE 36°



15.47W 36° 3000K



15.47W 36° 3000K



RECOMMEND

DIM TRIAC
416212EDT





ONE



TWIST

LIGHTBAR


Long tube with diffused light is the key idea for LIGHTBAR design concept.
Specially recommended as mirror lamp.
Available in 2 versions: fixed and routable that could be rotated by 350 degrees.

CE IP20 220-240VAC

LIGHTBAR ONE

LED POWER: 9.3W
CRI: 80
SYSTEM POWER: 11.5W
OUTPUT: 702Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 540*165*27mm
HOLE SIZE: /


L



LIGHTBAR TWIST

LED POWER: 9.3W
CRI: 80
SYSTEM POWER: 11.5W
OUTPUT: 724Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 947*58.4*45mm
HOLE SIZE: /

L










LIRA

LIRA is a new step in design,
a combination of light and furniture.
Bed side lighting fitting is available with bell shaped or stone shapes lamps.
Both versions create atmosphere of romance
and harmony to any bedroom.

LIRA F special floor lamp is continuing the concept design of LIRA series.
This unique floor lamp is equipped with USB slot.
LIRA F is going with DIM function.

IP20 100/220-240VAC DIM PUSH USB CHARGER




W

LIRA W

LED POWER: 2W
CRI: 90
SYSTEM POWER: 2.4W
OUTPUT: 30Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 320*160*65mm
HOLE SIZE: /

422714A



L



W2 R




W2 L

LIRA W2 R /LIRA W2 L


LED POWER: 8W
CRI: 90
SYSTEM POWER: 9.4W
OUTPUT: 268Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 320*160*291mm
HOLE SIZE: /

L

422812EA



422512EA





W3 R




W3 L

LIRA W3 R /LIRA W3 L


LED POWER: 8W
CRI: 90
SYSTEM POWER: 9.4W
OUTPUT: 371Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 320*160*136mm
HOLE SIZE: /

L

422612EA



422912EA








DIM LED POWER: 2+2W

DIM LED POWER: 6W



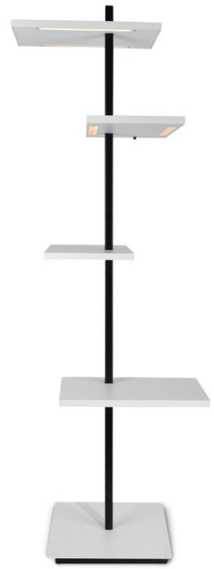




F5G

423512EA

LIRA F5G

LED POWER: 22W
CRI: 90
SYSTEM POWER: 25.9W
OUTPUT: 677Lm/3000K
INPUT: 100-240VAC ,50/60Hz
DIMENSION: 1330*310*310mm
HOLE SIZE: /

L



RECOMMEND

DIM PUSH
423512EA


F5C

427019EA

LIRA F5C

LED POWER: 22W
CRI: 80
SYSTEM POWER: 25.9W
OUTPUT: 478Lm/3000K
INPUT: 100-240VAC ,50/60Hz
DIMENSION: 1318*310*310mm
HOLE SIZE: /

L



RECOMMEND

DIM PUSH
427019EA


F5

426914EA

LIRA F5

LED POWER: 13W
CRI: 80
SYSTEM POWER: 14.5W
OUTPUT: 240Lm/3000K
INPUT: 100-240VAC ,50/60Hz
DIMENSION: 1318*310*310mm
HOLE SIZE: /

L



RECOMMEND

ON/OFF
426914EA



LIRA





LIRA







LUXURY

LUXURY, as its name indicates, can give additional luxurious and elegant detail to any room, be it residential or public spaces.
This splendid surface mounted downlight is presented with single or double versions.
To extend the collection, LUXURY ON LONG version was created.

LUXURY can be used in an elegant combination of wall mounted and ceiling mounted variants. Aesthetics and functionality are the key words to describe LUXURY collection.
Various of color combinations are available for choice.
In addition, the product has adjustable function.

IP20 100-240VAC



WALL SINGLE

WALL DOUBLE

COLOR FINISHINGS:



PAW - WWH | PAW - WBL | PAW - WSG | PAW - WGL


PAB - WWH | PAB - WBL | PAB - WSG | PAB - WGL



LUXURY WALL SINGLE

LED POWER: 9.35W
LED OUTPUT: 1009Lm/3000K
SYSTEM POWER: 11.4W
SYSTEM OUTPUT: 720Lm
INPUT: 100-240VAC,50/60Hz
CRI: 90
DIMENSION: 113*102*85mm
HOLE SIZE: /


409412EA




LUXURY WALL DOUBLE

LED POWER: 2*9.25W
LED OUTPUT: 1009Lm/3000K
SYSTEM POWER: 2*11.4W
SYSTEM OUTPUT: 1440Lm
INPUT: 100-240VAC,50/60Hz
CRI: 90
DIMENSION: 195.5*113*85mm
HOLE SIZE: /


409522EA




Angle 36°



9.35W 36° 3000K




9.35W 36° 3000K





OPTIONS:

OPTICS:








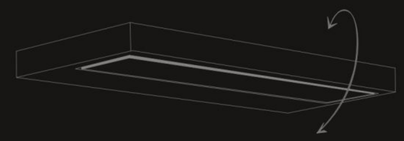





MIRO

Wall lamp with diffused light that could be easily adjusted however needed.
Can be used as lamp for mirror, painting or other objects on the wall.
Available in 2 sizes 300 mm and 550 mm.

IP20 220-240VAC




MIRO 300

LED POWER: 9.6W
CRI: 80
SYSTEM POWER: 10.3W
OUTPUT: 725Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 300*115.5*20mm
HOLE SIZE: /

L

418714A



COLOR FINISHINGS:

PAW PAB



MIRO 550

LED POWER: 16.8W
CRI: 80
SYSTEM POWER: 18.9W
OUTPUT: 1535 Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 548*115.5*20
HOLE SIZE: /

L

418814A



COLOR FINISHINGS:

PAW PAB









MOON

We strongly believe beauty is coming from natural simple forms.
Spherical shape of MOON series with its perfect indirect light,
gives romantic atmosphere to any premises.

Combination of small round lights mounted on the wall gives additional decorative function to the room, creating elegant light performance.

Thanks to its small shape MOON can be good choice both for small rooms.

IP20 220-240VAC




MOON

LED POWER: 2.2W
CRI: 80
SYSTEM POWER:3W
OUTPUT: 150Lm/3000K
INPUT: 220-240VAC,50/60Hz

L

421614A




SET

Very impressive and nicely delineated parabolic light
creates perfect light patterns on the wall.
Thanks to newest technical achievements of LED and lens,
SET produces special light effect,
playing with light and shade on the wall.
Single use or in combination SET always provides special beauty for any room.

CE IP20 220-240VAC DIM TRIAC

SET

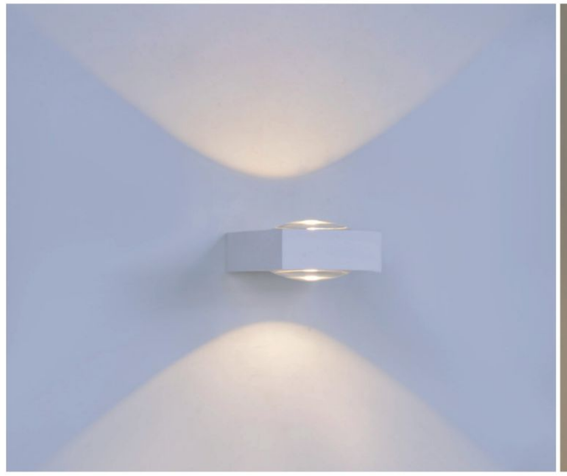





SET

LED POWER:7.8W/AC LED
SYSTEM POWER:7.8W
SYSTEM OUTPUT: 654Lm/3000K
INPUT: 220-240VAC, 50/60Hz
CRI: 80
DIMENSION: 100*70*40mm
HOLE SIZE: /


416615DT




ANGLE C



7.8W C 3000K



7.8W C 3000K



RECOMMEND

DIM TRIAC
416615DT

SHELL

Extending wall light collection,
FLUA has created new range SHELL.
Simple and elegant design of SHELL makes this model very popular.
Thanks to various color combinations
SHELL can be easily integrated to any interior design concept
of the room be it residential or public space.
Round and square shapes are available.

CE IP20 220-240VAC DIM TRIAC



ROUND



SQUARE

SHELL ROUND / SQUARE

LED POWER:3.9W/AC Module
CRI: 80
SYSTEM POWER:3.9W
OUTPUT: 325Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 150*87*83mm
HOLE SIZE: /


L

RECOMMEND


DIM TRIAC 414615DT

DIM TRIAC 414715DT

414615DT



414715DT



SINE

This minimalist wall lamp is a great solution as auxiliary lighting.
The light comes from one or both sides.
SINE gives perfect lighting and decorative effect to any room.
Recommended for bed rooms, corridors, living rooms.

CE IP20 220-240VAC

S



S DOUBLE

SINE S


LED POWER: 3.2W
CRI: 80
SYSTEM POWER: 3.6W
OUTPUT: 159Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 270*76*27.5mm
HOLE SIZE: /



L

SINE S DOBOLLE


LED POWER: 6.4W
CRI: 80
SYSTEM POWER: 7.2W
OUTPUT: 318Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 270*96*27.5mm
HOLE SIZE: /



L

COLOR FINISHINGS:


PAW PAB

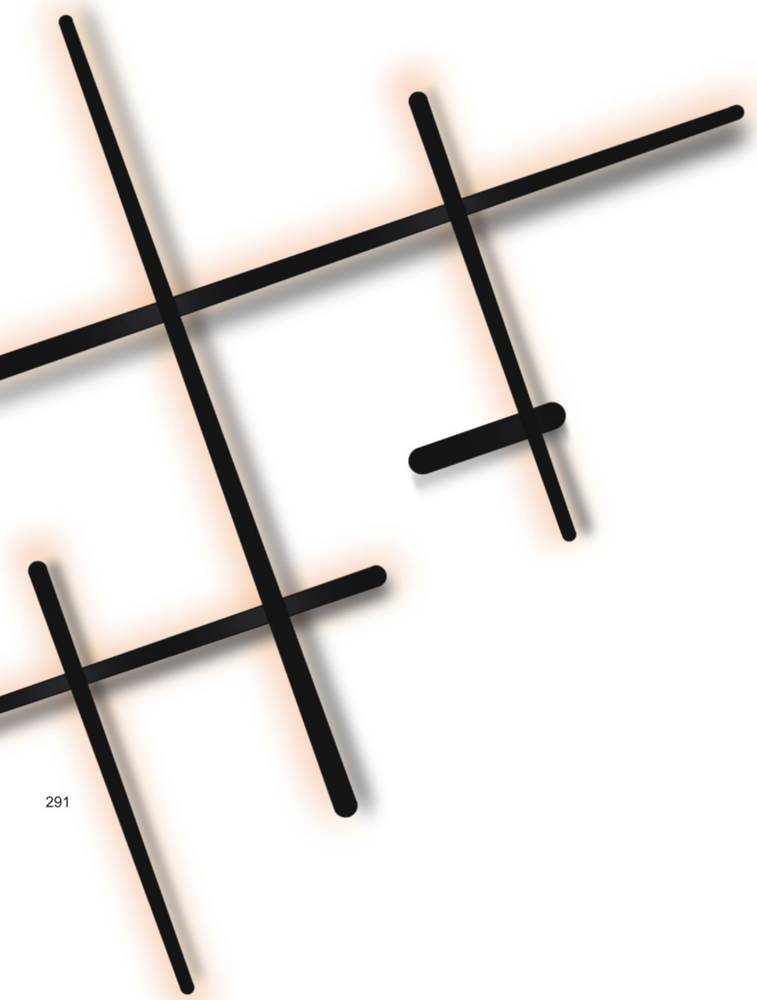


SONG

SONG is a new example of a deep integration of light and architectural solutions.
Light has no more limits.
SONG is available in 3 designs.
Each element of the fitting can be freely oriented and rotated in any direction whatever needed,
endlessly creating new unique ideas for inspiration.


CE IP20 100-240VAC DIM 1-10V



C



D




E

SONG C

CRI: 80
SYSTEM POWER:33W
INPUT: 100-240VAC,50/60Hz
DIMENSION: 1855*1375*60mm
HOLE SIZE: /

414034DX



L


RECOMMEND

DIM 1-10V
414034DX

SONG D

CRI: 80
SYSTEM POWER:47W
INPUT: 100-240VAC, 50/60Hz
DIMENSION: 1855*1786.5*60mm
HOLE SIZE: /

414144DX



L


RECOMMEND

DIM 1-10V
414144DX

SONG E

CRI: 80
SYSTEM POWER:54W
INPUT: 100-240VAC, 50/60Hz
DIMENSION: 1855*1786.5*60mm
HOLE SIZE: /

414254DX



L

RECOMMEND

DIM 1-10V
414254DX

COLOR FINISHINGS:

PAB PAW








TV

Long triangular shaped lamp with diffused up light
is a good example of simplicity and elegance. 3 sizes are available for choice.

CE IP20 100-240VAC

TV

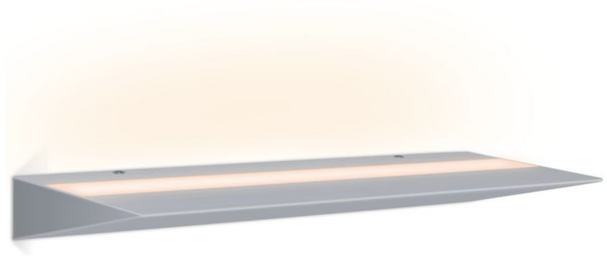

S/M/L
S+/M+/L+

TV S

LED POWER:12W
CRI: 80
SYSTEM POWER:13.57W
OUTPUT: 1065Lm/3000K
INPUT:100-240VAC,50/60Hz
DIMENSION: 318*120.5*35mm
HOLE SIZE: /

TV M

LED POWER:17W
CRI: 80
SYSTEM POWER:18.41W
OUTPUT: 1480Lm/3000K
INPUT:100-240VAC,50/60Hz
DIMENSION: 618*120.5*35mm
HOLE SIZE: /

TV L

LED POWER:23.86W
CRI: 80
SYSTEM POWER:25.57W
OUTPUT: 2049Lm/3000K
INPUT:100-240VAC,50/60Hz
DIMENSION: 918*120.5*35mm
HOLE SIZE: /

TV S+

LED POWER:23.86W
CRI: 80
SYSTEM POWER:27.6W
OUTPUT: 1978Lm/3000K
INPUT:100-240VAC,50/60Hz
DIMENSION: 318*120.5*35mm
HOLE SIZE: /


TV M+

LED POWER:2*23.86W
CRI: 80
SYSTEM POWER:56W
OUTPUT: 3637Lm/3000K
INPUT:100-240VAC,50/60Hz
DIMENSION: 618*120.5*35mm
HOLE SIZE: /


TV L+

LED POWER:3*23.86W
CRI: 80
SYSTEM POWER:84.9W
OUTPUT: 5420Lm/3000K
INPUT:100-240VAC,50/60Hz
DIMENSION: 918*120.5*35mm
HOLE SIZE: /


420814A / 436514A





420914A / 436614A



421014A / 436714A



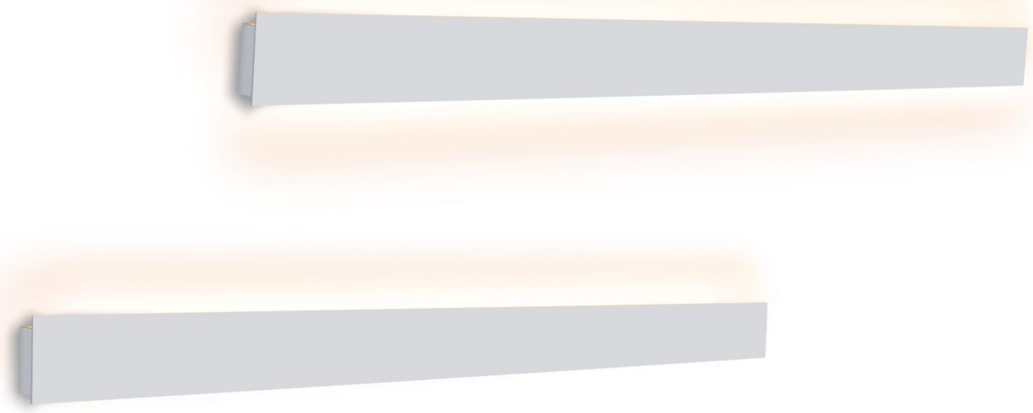

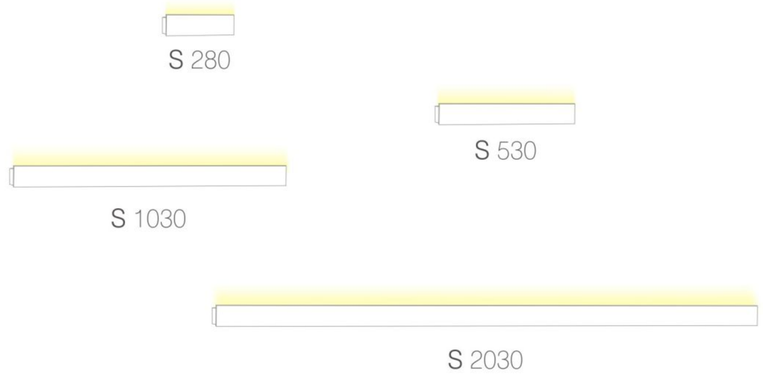

WALL LINE 2.0

This splendid wall lamp with wide selection of sizes
is perfect choice for auxiliary lighting in the room.
WALL LINE comes in one side lighting or up and down version.
Length of the fixture could be customized
according to the interior design requirement.

IP20 220-240VAC

WALL LINE 2.0 S 280

LED POWER:3.2W
CRI: 80
SYSTEM POWER:3.6W
OUTPUT: 184Lm/3000K
INPUT:220-240VAC,50/60Hz
DIMENSION: 273*76*27.5mm
HOLE SIZE: /

L

WALL LINE 2.0 S 530

LED POWER:7.2W
CRI: 80
SYSTEM POWER:8.3W
OUTPUT: 460Lm/3000K
INPUT:220-240VAC,50/60Hz
DIMENSION: 523*76*27.5mm
HOLE SIZE: /

L

WALL LINE 2.0 S 1030

LED POWER:14.4W
CRI: 80
SYSTEM POWER:16.35W
OUTPUT: 992Lm/3000K
INPUT:220-240VAC,50/60Hz
DIMENSION: 1023*76*27.5mm
HOLE SIZE: /

L


WALL LINE 2.0 S 2030

LED POWER:28.8W
CRI: 80
SYSTEM POWER:32.75W
OUTPUT: 1724Lm/3000K
INPUT:220-240VAC,50/60Hz
DIMENSION: 2030*76*27.5mm
HOLE SIZE: /

L

COLOR FINISHINGS:

PAW PAB

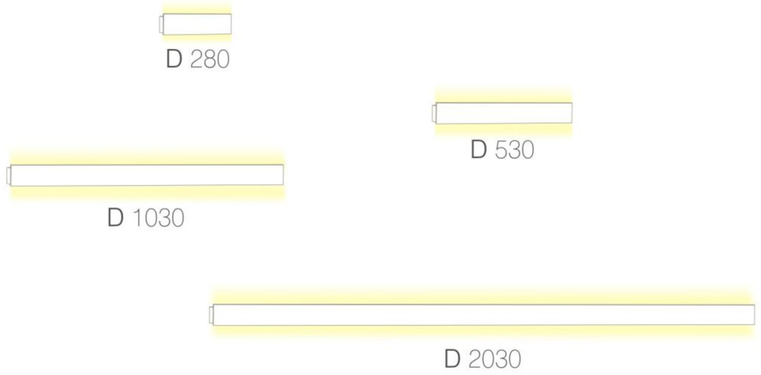



WALL LINE 2.0 D 280

LED POWER:6.4W
CRI: 80
SYSTEM POWER:7.2W
OUTPUT: 318Lm/3000K
INPUT:220-240VAC,50/60Hz
DIMENSION: 273*96*27.5mm
HOLE SIZE: /

L

WALL LINE 2.0 D 530

LED POWER:14.4W
CRI: 80
SYSTEM POWER:16.6W
OUTPUT: 836Lm/3000K
INPUT:220-240VAC,50/60Hz
DIMENSION: 523*96*27.5mm
HOLE SIZE: /

L

WALL LINE 2.0 D 1030

LED POWER:28.8W
CRI: 80
SYSTEM POWER:32.7W
OUTPUT: 1672Lm/3000K
INPUT:220-240VAC,50/60Hz
DIMENSION: 1023*96*27.5mm
HOLE SIZE: /

L

WALL LINE 2.0 D 2030

LED POWER:57.6W
CRI: 80
SYSTEM POWER:65.5W
OUTPUT: 3344Lm/3000K
INPUT:220-240VAC,50/60Hz
DIMENSION: 2023*96*27.5mm
HOLE SIZE: /

L

COLOR FINISHINGS:

PAW PAB

WING


Just like a bird's fly,
WING could provide beautiful feeling of freedom and perfection of natural forms.
The unique design and elegant light effect confirming
FLUA's longstanding philosophy for timeless design.
WING could be great choice for both residential and hospitality application.

IP20 220-240VAC

WING

LED POWER: 9.2W
CRI: 80
SYSTEM POWER: 11.2W
OUTPUT: 845Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 240*90*57.5mm
HOLE SIZE: /

423414A



L





WALL ROTARY



DONNA 1
308



DONNA 3
309



LEGGO
312



OTLY IN IO
313



OTLY IN ROUND
313



ROSA
318




TATOU USB
320



TATOU BOX
321



TATOU BOX IO
321

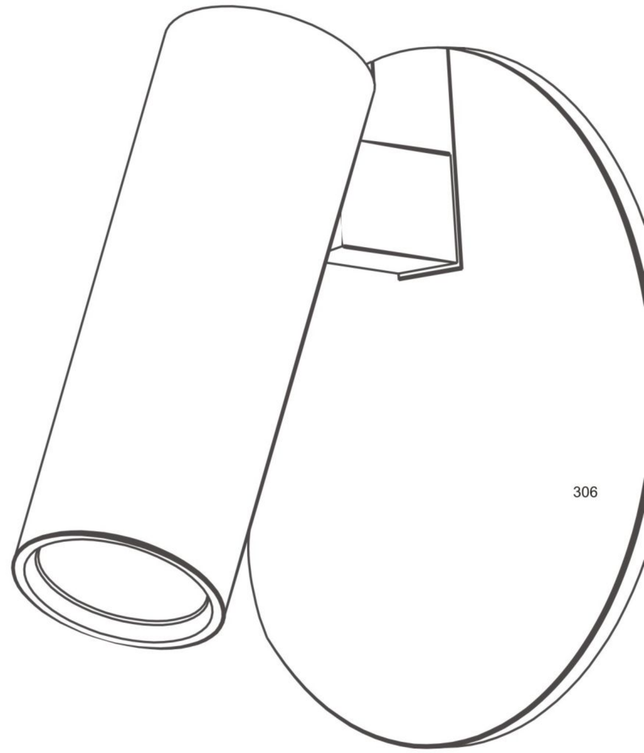

WWW.FLUA.COM

PERFORM YOUR LIGHT



DONNA

DONNA is a great example of elegance, simplicity and at the same time, usability.
This splendid reading lamp with USB charging connector makes it more functional and useful.
The lighting fitting is available with different design of the lamp shade and arm's length to match any possible use's demands.

IP20 100-240VAC DIM PUSH USB CHARGER



1

IOS/ANDROID CHARGER


DONNA 1

LED POWER:2.2W
CRI: 90
SYSTEM POWER:3.5W
OUTPUT: 136Lm/3000K
INPUT: 100-240VAC, 50/60Hz
DIMENSION: 100*50*460mm
HOLE SIZE: /


RECOMMEND

DIM PUSH
428417DT


428417DT




ANGLE 15°



2.2W 15° 3000K



2.2W 15° 3000K



COLOR FINISHINGS:

PAW PAB



3

IOS/ANDROID
CHARGER


DONNA 3

LED POWER:3.2W
CRI: 90
SYSTEM POWER:3.7W
OUTPUT: 236Lm/3000K
INPUT: 100-240VAC, 50/60Hz
DIMENSION: 100*50*501mm
HOLE SIZE: /


RECOMMEND

DIM PUSH
428317DT


428317DT




ANGLE 22°



3.2W 22° 3000K




3.2W 22° 3000K



COLOR FINISHINGS:

PAW PAB

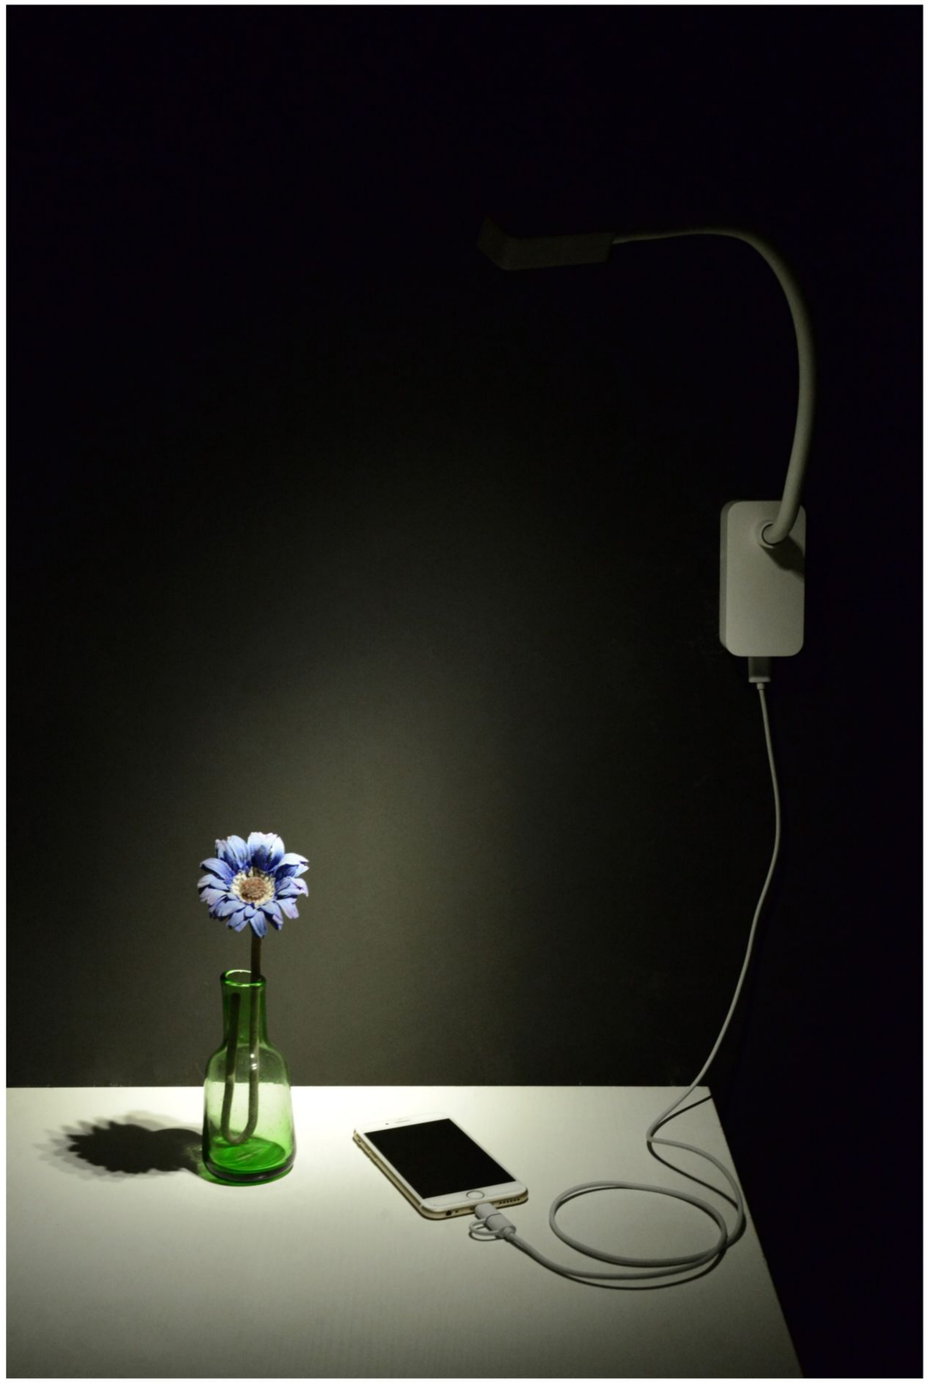

LEGGO

LEGGO is a new design concept of bedside lighting.
LEGGO is a nice example of elegance, flexibility and functionality.
Different selection of lamp shapes is specially created to meet any possible design requirement.
Each model has DIM function.

CE IP20 100-240VAC DIM TOUCH






2


LEGGO 2

LED POWER:2.2W
CRI: 80
SYSTEM POWER:3.5W
OUTPUT: 40Lm/3000K
INPUT: 100-240VAC, 50/60Hz
DIMENSION: 90*490*28mm
HOLE SIZE: /


416417DT




ANGLE L



2.2W L 3000K



2.2W L 3000K



RECOMMEND

DIM TOUCH
416417DT

COLOR FINISHINGS:

PAB PAW



IN IO




IN ROUND

OTLY

Simple minimal design of recessed bedside lighting.
OTLY is available in round and square shape.
Square version could be equipped with switch button.

IP20 100/220-240VAC




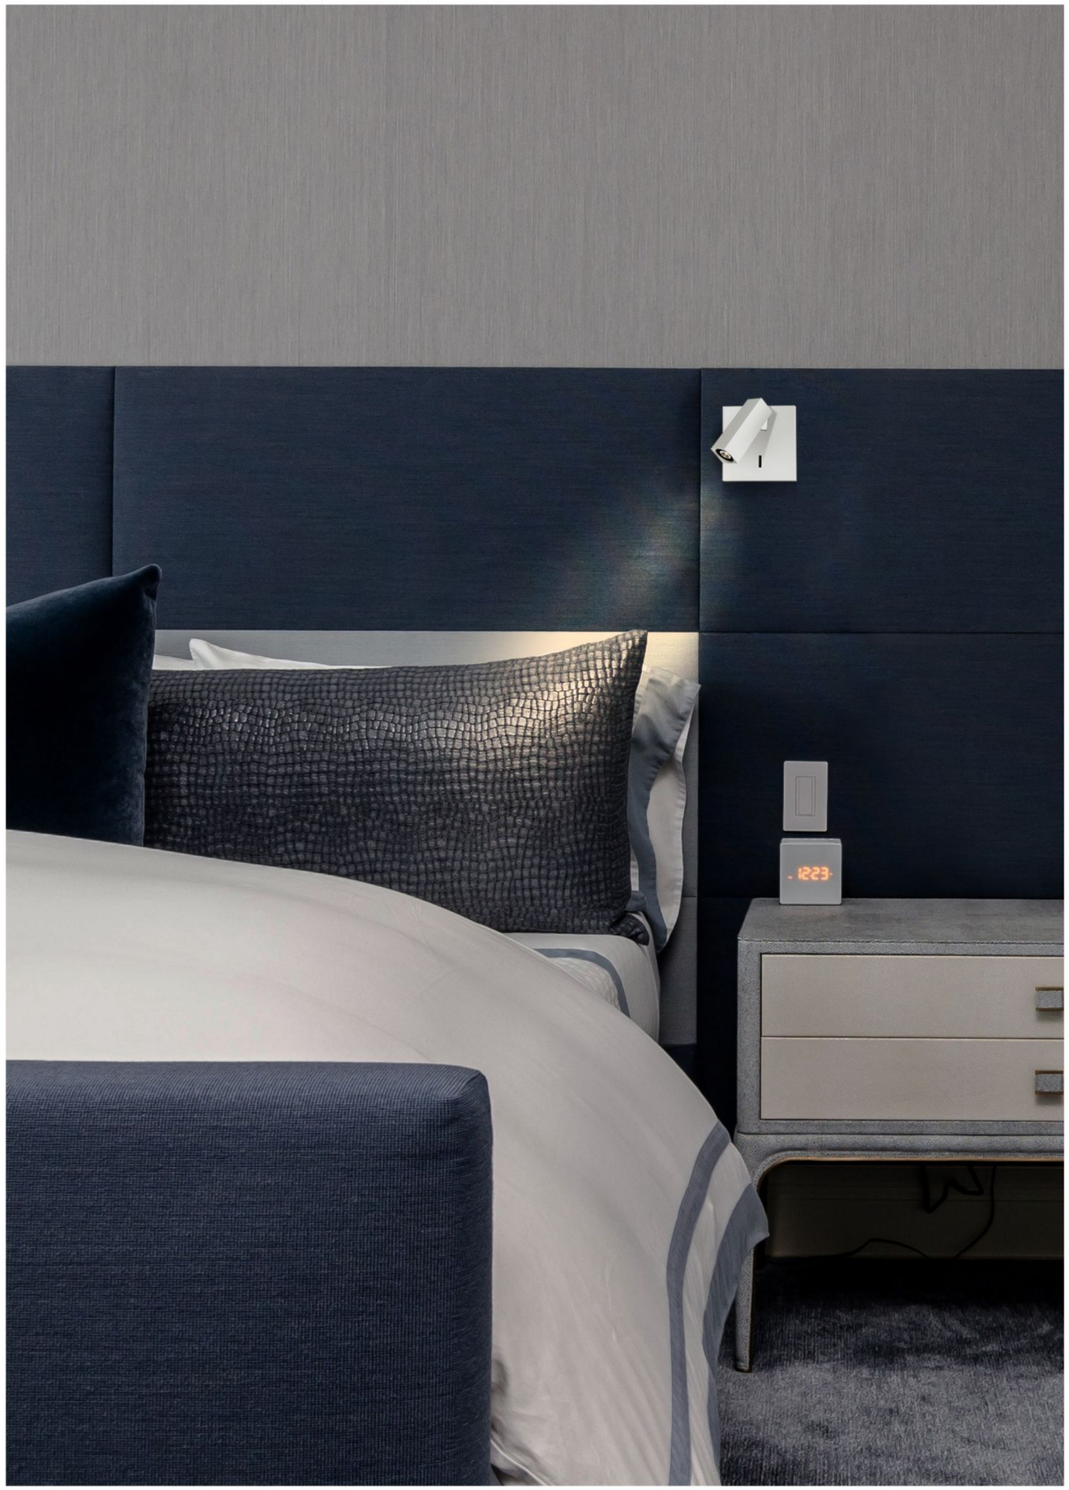


OTLY IN ROUND /IO

LED POWER:2.2W
CRI: 80
SYSTEM POWER:4.5W
OUTPUT: 144Lm/3000K
INPUT: 220-240VAC, 50/60Hz
DIMENSION: Ø90*82mm/91*91*90mm
HOLE SIZE: Ø75mm/95*95mm


425117A




425317A




ANGLE 21°



2.2W 21° 3000K

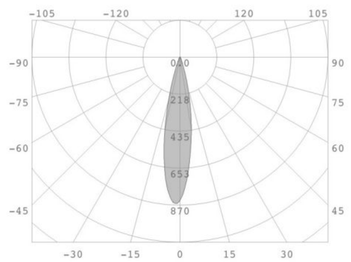

2.2W 21° 3000K



ROSA

ROSA is a new concept of bed side lamp.
Light fixture with high performance LED light source,composed
by a head with touch DIM and flexible arm.
Thanks to its miniature size and elegant shape, ROSA can match
any design concept in the room providing stylish and flexible lighting solution.
ROSA is the best choice for both residential
and hotel applications. Now it is
available with both round and square base shapes.

CE IP20 100-240VAC DIM PUSH






IN

ROSA IN


LED POWER:2.2W
CRI: 90
SYSTEM POWER:3.7W
OUTPUT: 160Lm/3000K
INPUT: 100-240VAC, 50/60Hz
DIMENSION: 78*78*502mm
HOLE SIZE: 71*71mm

428117DT


ANGLE 24°



2.2W 24° 3000K



2.2W 24° 3000K



RECOMMEND

DIM PUSH
428117DT

COLOR FINISHINGS:

PAB PAW

TATOU

New concept of bedside lighting
TATOU is flexible and functional friendly collection.
Thanks to its structure, TATOU can be adjusted up to 90°and tilt up to 355 °,
making it easy to focus the light beam however needed.
TATOU BOX version have two options for choice: with and without switch button.

IP20 100/220-240VAC DIM TRIAC USB CHARGER






USB

IOS/ANDROID CHARGER

TATOU USB

LED POWER: 2.2W
CRI: 90
SYSTEM POWER: 4W
OUTPUT:115 Lm/3000K
INPUT: 100-240VAC
DIMENSION: 102*51*202mm
HOLE SIZE: /


433517DT




ANGLE 15°



2.2W 15° 3000K



2.2W 15° 3000K



COLOR FINISHINGS:

PAW PAB



BOX



BOX IO

TATOU BOX / BOX IO

LED POWER: 6W
CRI: 90
SYSTEM POWER: 7.1W
OUTPUT: 413Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 138*165*35.6mm
153*165*35.6mm
HOLE SIZE: /


423011A




423111A




ANGLE 15°



6W 15° 3000K



6W 15° 3000K



COLOR FINISHINGS:

PAB PAW



WALL INSTRUCTIONS



CARD IN 1
326



CARD IN 2
326



CARD SQ
326



DANAS RO 1
332



DANAS SQ 1
332



DANAS RO 2
332



DANAS SQ 2
332



DANAS RO 3
332



DANAS SQ 3
332



DANAS RO 4
332



DANAS SQ 4
332



DANAS RO 5
332




DANAS SQ 5
332



KEATON MINI S
334




KEATON MINI L
334



SLIDE AISI316
337



SLIDE IP SQUARE
338



SLIDE IP RECTANGULAR
339



SLIDE
340



SNOW
343



TONE S RO RGB AISI316
348




TONE S LI RGB AISI316
348




TONE S RO RGB
348




TONE S LI RGB
348




TONE IN
349



TONE IN AISI316
349

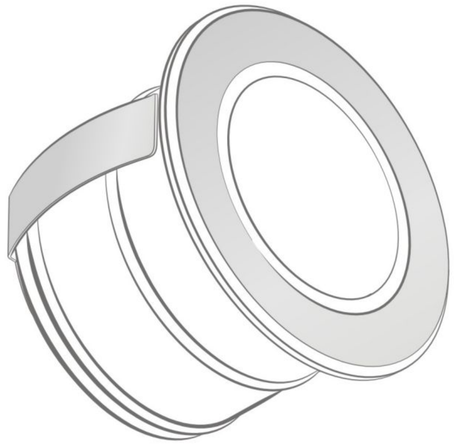

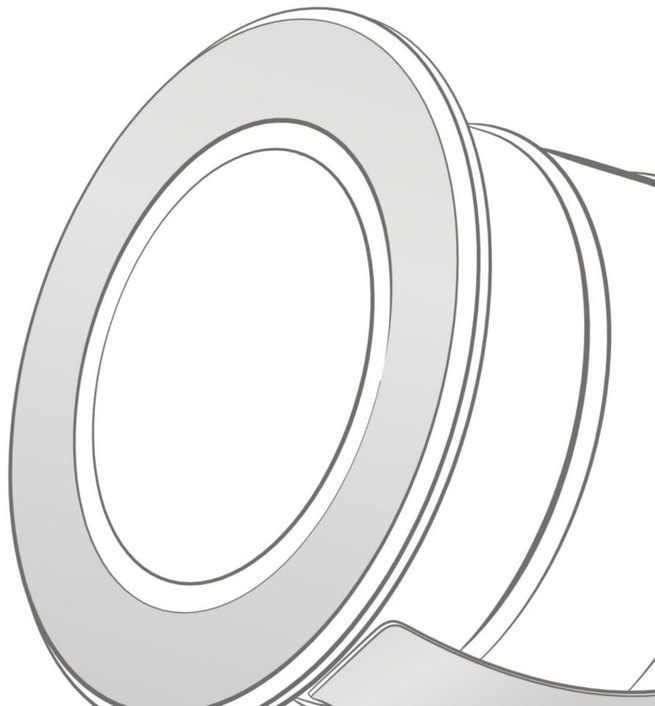

WWW.FLUA.COM

PERFORM YOUR LIGHT

CARD

CARD is the best choice for guidance light in hallways and staircase for indoor application.
Narrow beam angle produces triangular shaped lighting effect on the floor.
CARD series is presented by 3 different dimensions that could meet all possible lighting requirements. In addition to white amber color,
CARD is available in red, green and blue colors.
CARD can be installed both in plywood and cement walls.

IP20 220-240VAC





IN 2



SQ




IN 1








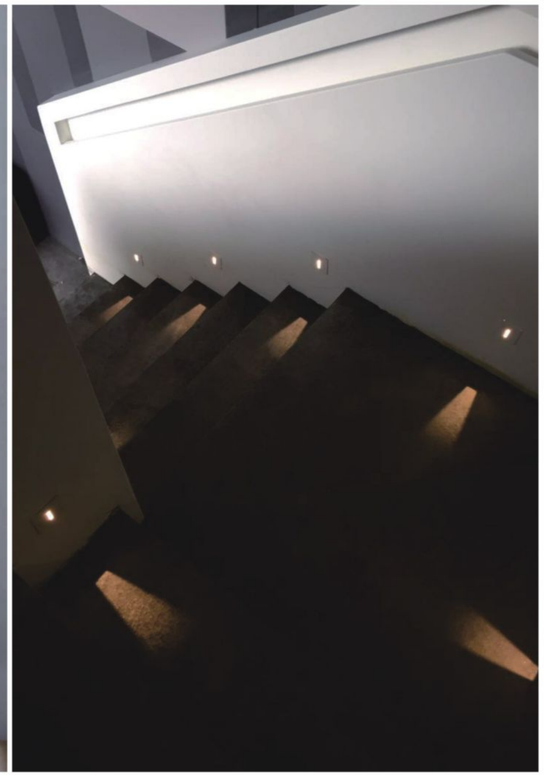

CARD IN 1

LED POWER: 2.2W
LED OUTPUT: 199Lm/3000K
SYSTEM POWER: 4W
SYSTEM OUTPUT: 80Lm
INPUT: 220-240VAC,50/60Hz
CRI: 80
DIMENSION: 70*35*38mm
HOLE SIZE: 150*150*50.5mm


P



CARD IN 2

LED POWER: 2.2W
LED OUTPUT: 199Lm/3000K
SYSTEM POWER: 4W
SYSTEM OUTPUT: 75Lm
INPUT: 220-240VAC,50/60Hz
CRI: 80
DIMENSION: 175*35*50mm
HOLE SIZE: 130*250*52.5mm


P



CARD SQ

LED POWER: 2.2W
LED OUTPUT: 199Lm/3000K
SYSTEM POWER: 4W
SYSTEM OUTPUT: 69Lm
INPUT: 220-240VAC,50/60Hz
CRI: 80
DIMENSION: 70*70*40mm
HOLE SIZE: 150*150*49mm


P



DANAS

Thanks to wide variety of the outer frame,
DANAS can meet any design requirements creating different lighting patterns on the floor.
IP 65 rate makes it possible to use DANAS for both interior and exterior projects.
Both round and square frames are available.
Plastic box is provided specially for installation into cement wall.

CE IP65 220-240VAC

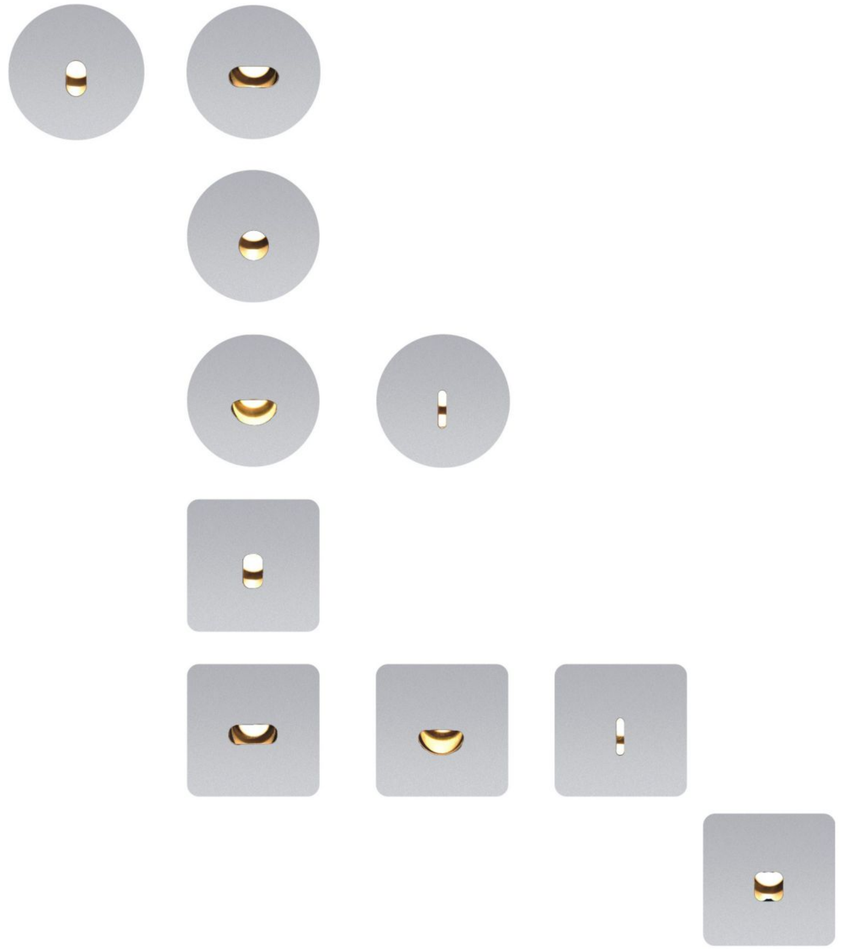

COLOR FINISHINGS:



PAW PAB PCS




DANAS □

LED POWER: 2.2W
LED OUTPUT: 168Lm/3000K
SYSTEM POWER: 4.0W
SYSTEM OUTPUT: 27Lm
INPUT: 220-240VAC,50/60Hz
CRI: 80
DIMENSION: Ø55*42mm/55*55*42mm
HOLE SIZE: Ø45mm/Ø70mm


ANGLE C




2.2W C 3000K





2.2W C 3000K







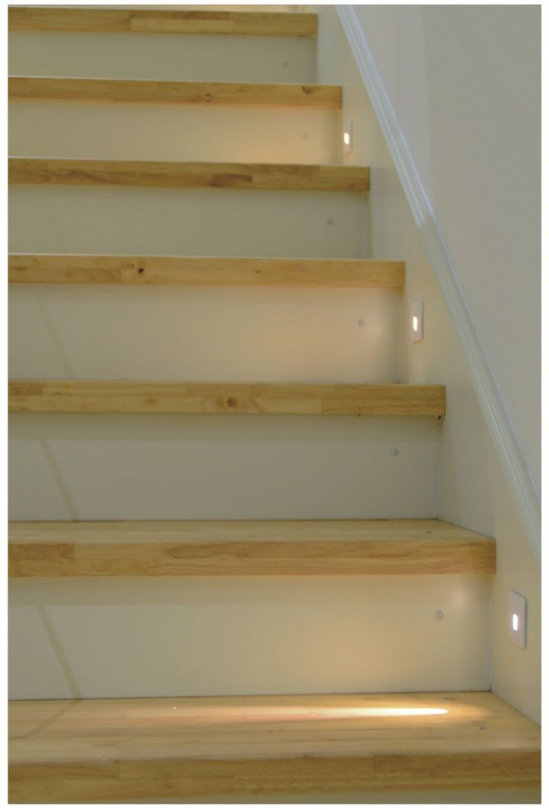

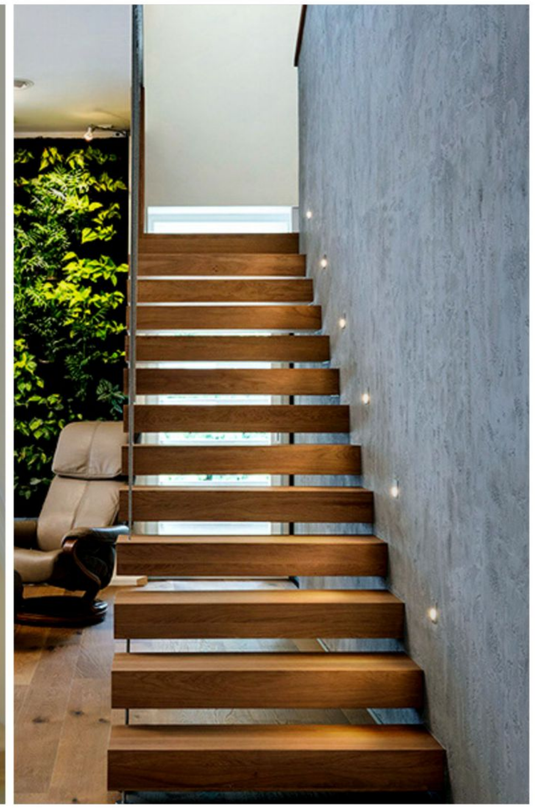


RO 1
408411A

SQ 1
408911A




RO 2
408511A

SQ 2
409011A

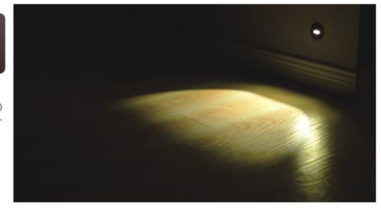

RO 3
408611A

SQ 3
409111A

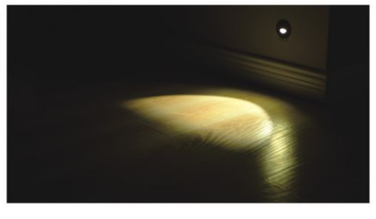


RO 4
408711A

SQ 4
409211A



RO 5
408811A

SQ 5
409311A

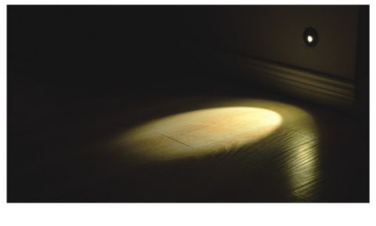

KEATON

KEATON is a popular wall recessed fixture for guidance light in hallways.
Special light beam produces splendidlight effect on the floor
creating visual prolongation of the space.
Available in 3 sizes.
KEATON is perfect for usage in hotels, restaurants and other public areas.

IP20 100-240VAC



MINI S




MINI L

KEATON MINI S

LED POWER: 1W
LED OUTPUT: 102Lm/3000K
SYSTEM POWER: 1.9W
SYSTEM OUTPUT: 17Lm
INPUT: 100-240VAC,50/60Hz
CRI: 90
DIMENSION: 69.5*66*31.3mm
HOLE SIZE: 40*73mm


433717



KEATON MINI L

LED POWER: 1W
LED OUTPUT: 102Lm/3000K
SYSTEM POWER: 1.9W
SYSTEM OUTPUT: 17Lm
INPUT: 100-240VAC,50/60Hz
CRI: 90
DIMENSION: 127.5*66*31.3mm
HOLE SIZE: 40*131mm

433917






SLIDE

As a wall recessed luminaire,
SLIDE is perfect as a guidance light.
Be it in a corridor or as a safety light for the steps of your stairs at night,
SLIDE does the trick. SLIDE is available with IP20 and IP65 rate.
For special requirements stainless steel version
is also available.

IP20 IP65 100/220-240VAC

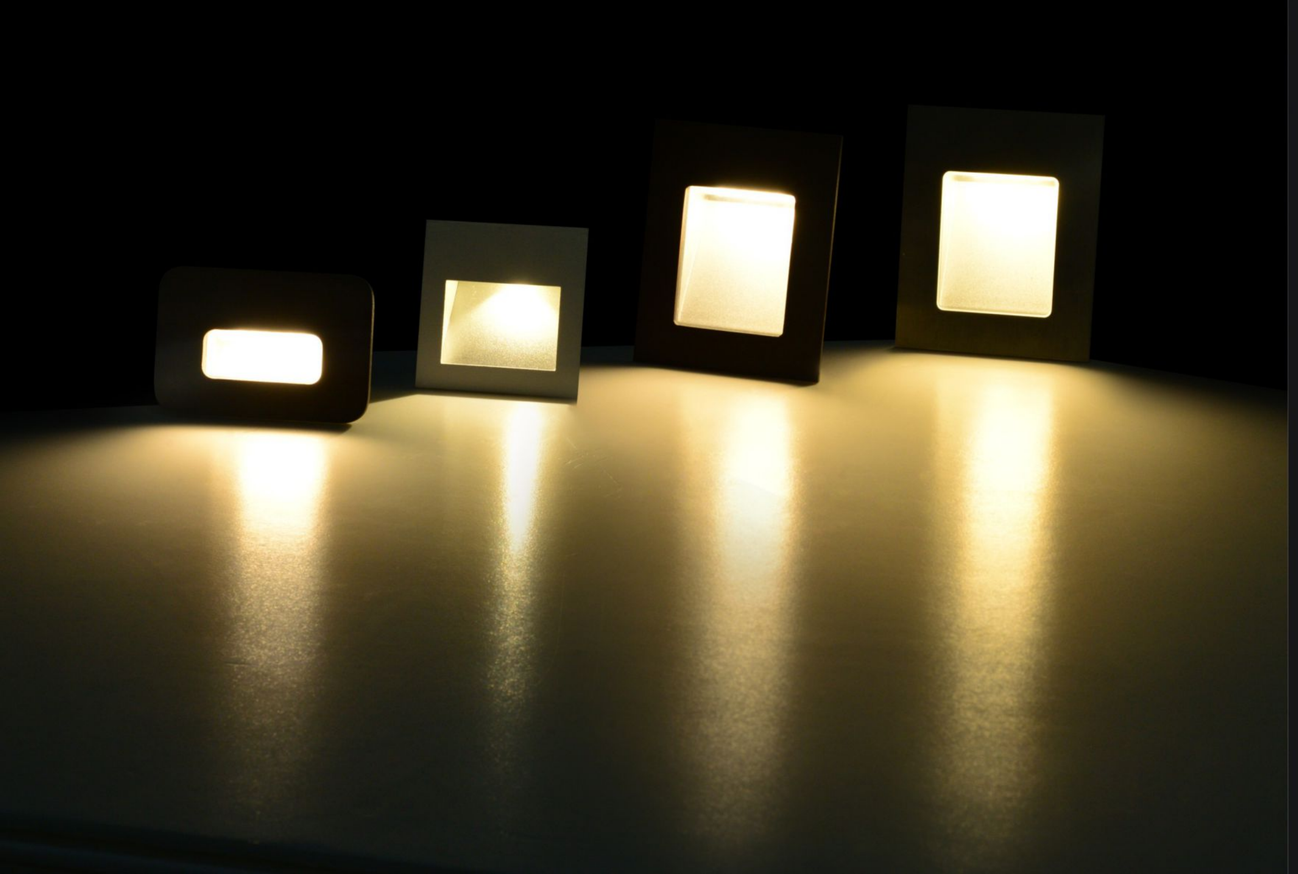




AISI316

SLIDE IP AISI316 IP65

LED POWER:3W
CRI: 80
SYSTEM POWER:5.1W
OUTPUT:215Lm/3000K
INPUT: 100-240VAC, 50/60Hz
DIMENSION: 85*105*43mm
HOLE SIZE: 75*95mm


413914A




ANGLE P



3W P 3000K



3W P 3000K






IP SQUARE

SLIDE IP SQUARE IP65

LED POWER:3W
CRI: 80
SYSTEM POWER:5.1W
OUTPUT:215Lm/3000K
INPUT: 100-240VAC, 50/60Hz
DIMENSION: 85*105*43mm
HOLE SIZE: 75*95mm

411214A







ANGLE P



3W P 3000K



3W P 3000K






IP RECTANGULAR

SLIDE IP RECTANGULAR IP65

LED POWER:3W
CRI:80
SYSTEM POWER:5.1W
OUTPUT: 171Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: 90*60*48mm
HOLE SIZE: 45*75mm


411314A




ANGLE P



3W P 3000K



3W P 3000K






SLIDE

SLIDE □ IP20

LED POWER: 2.2W
LED OUTPUT: 199Lm/3000K
SYSTEM POWER: 5.1W
SYSTEM OUTPUT: 90Lm
INPUT: 220-240VAC,50/60Hz
CRI: 80
DIMENSION: 70*70*40mm
HOLE SIZE: 65*65mm/95*95mm


415017A

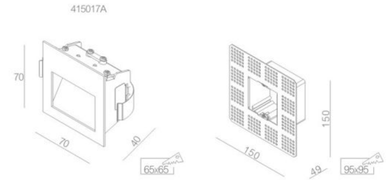


ANGLE P





2.2W P 3000K




2.2W P 3000K



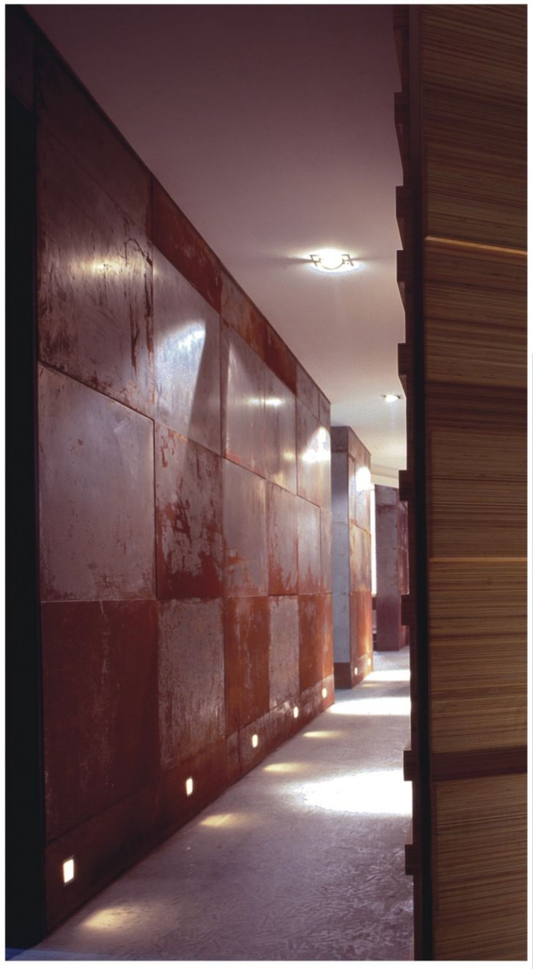

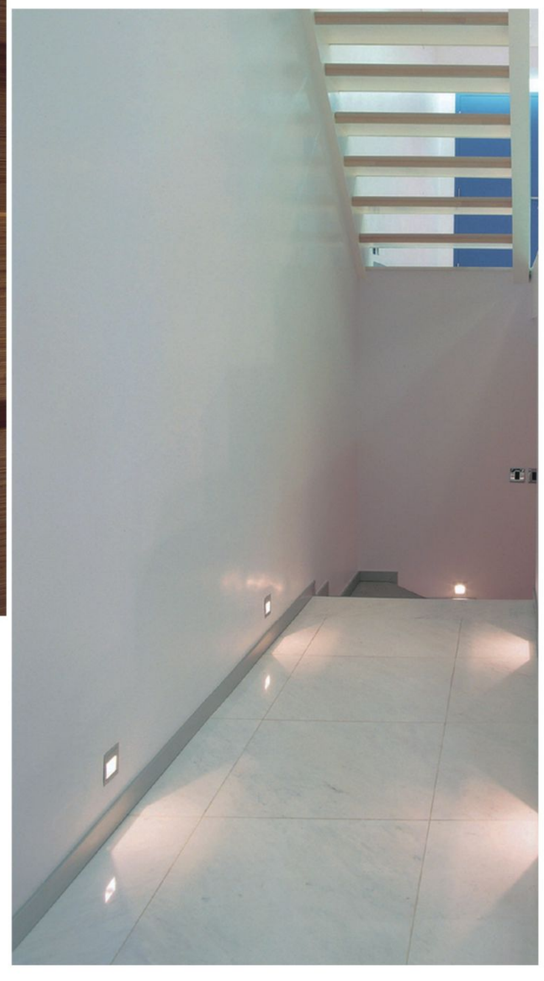

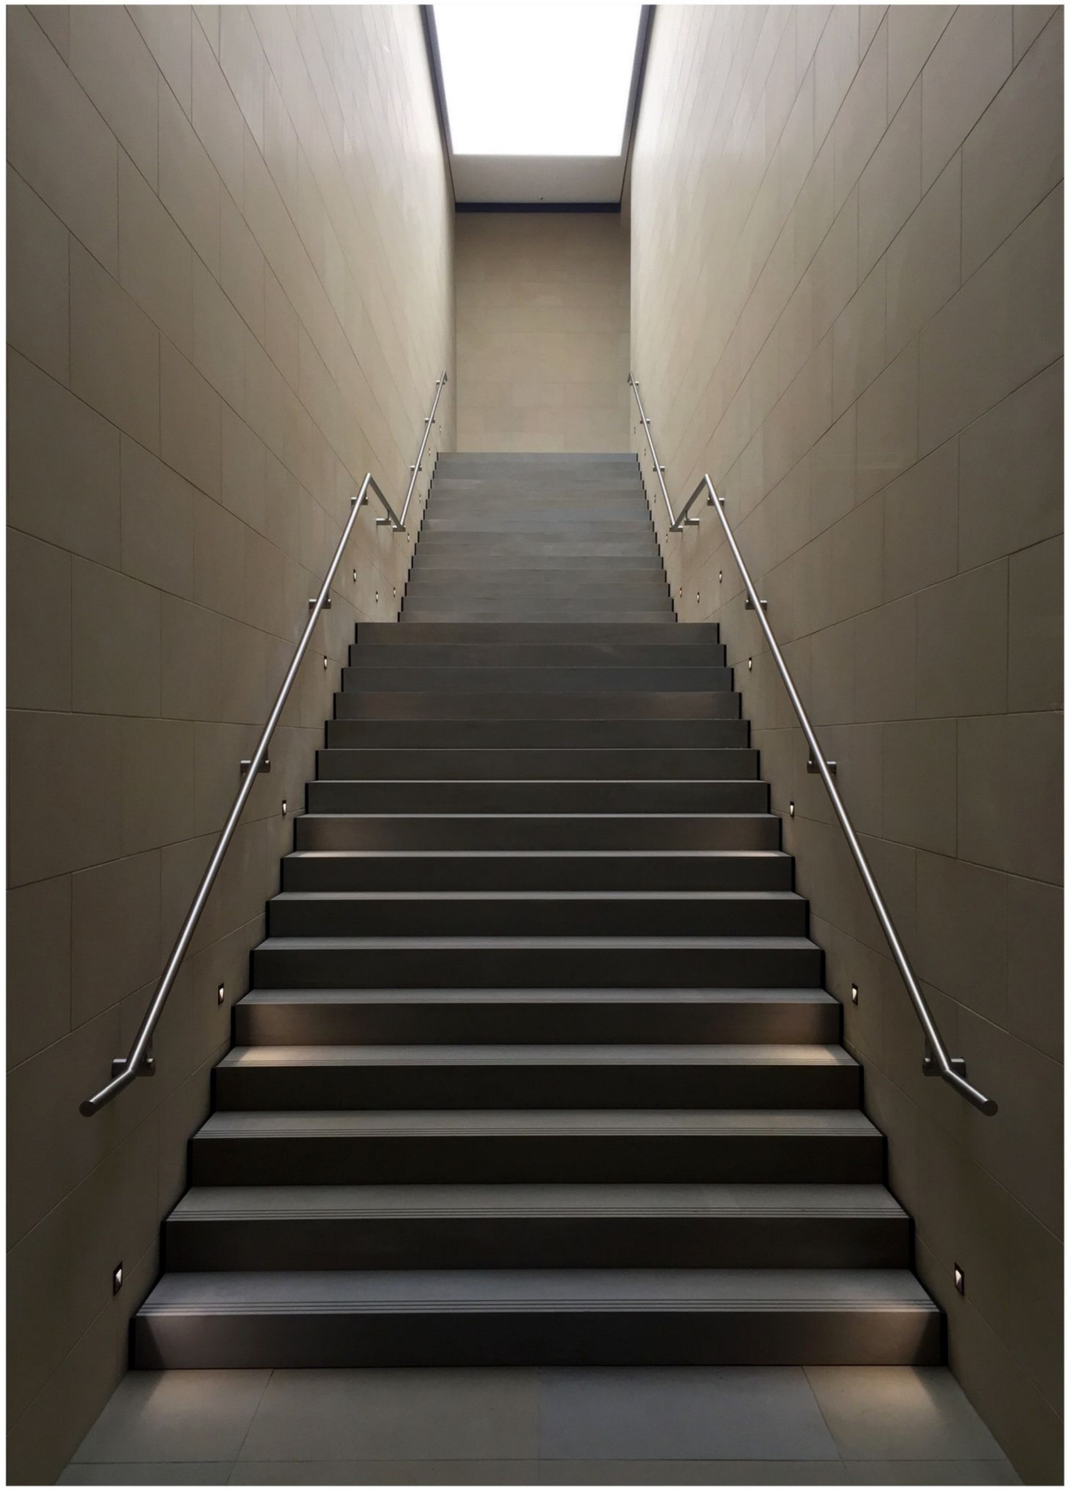




SNOW


This miniature fixture,thanks to its special structure,
makes the light going from a deep shelter, creating unique lighting patterns on the floor.


Due to its slim body,
SNOW can be easily installed in the places where the space is limited.

CCC CE IP54 220-240VAC

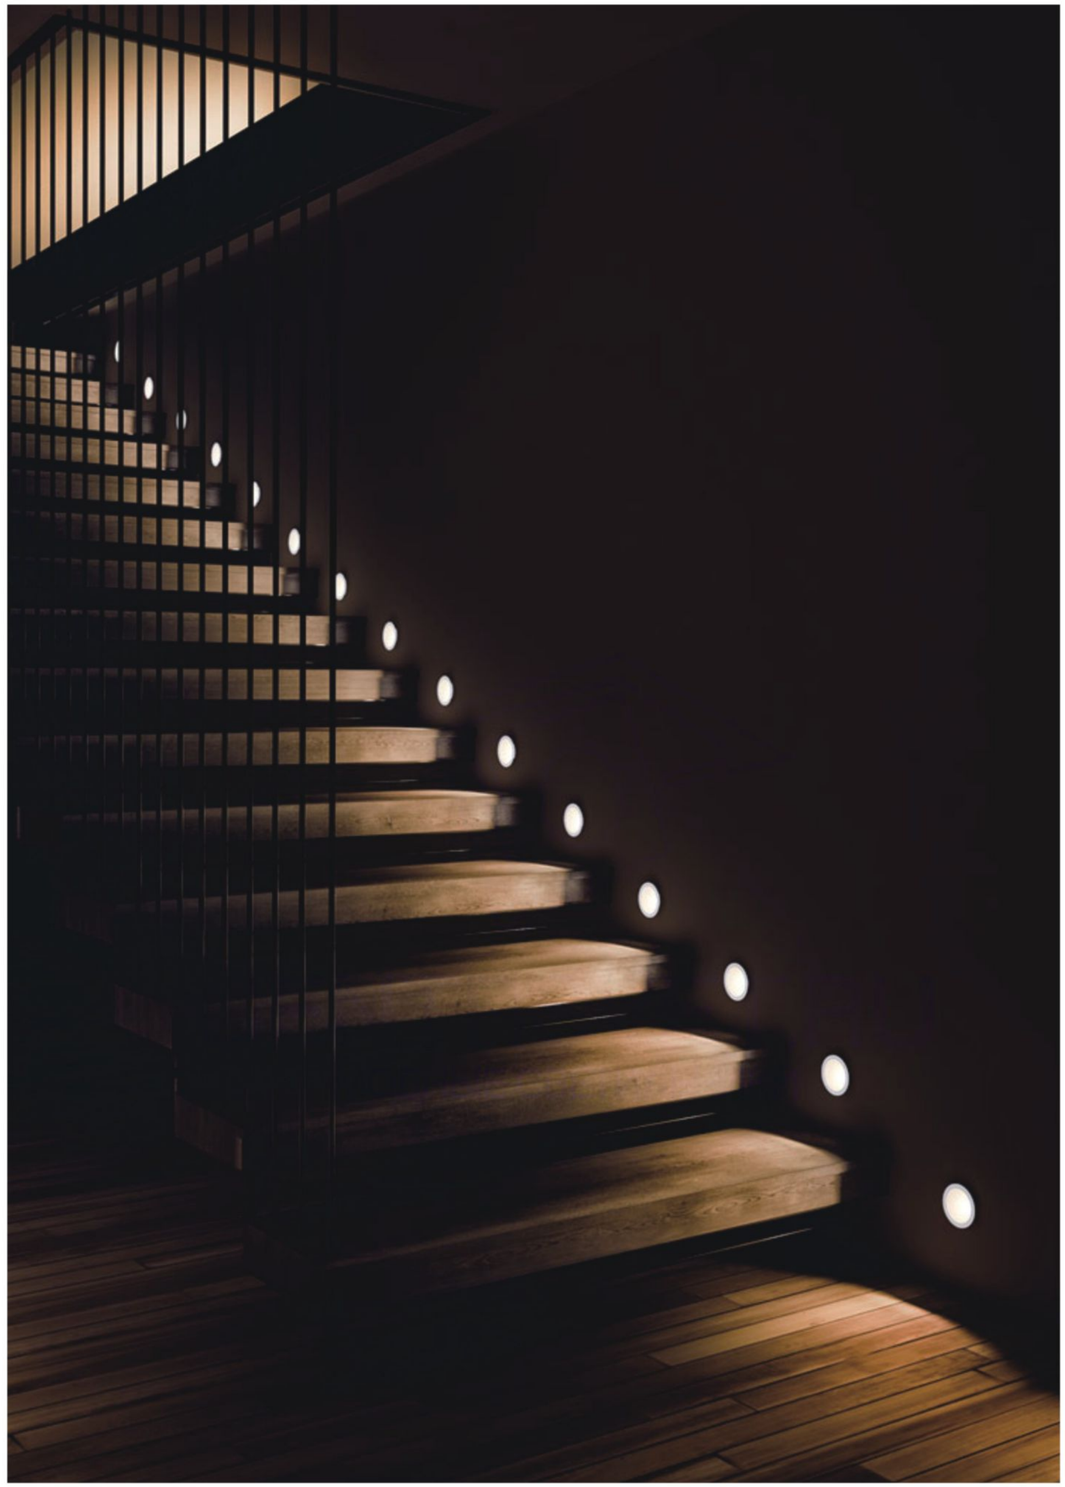




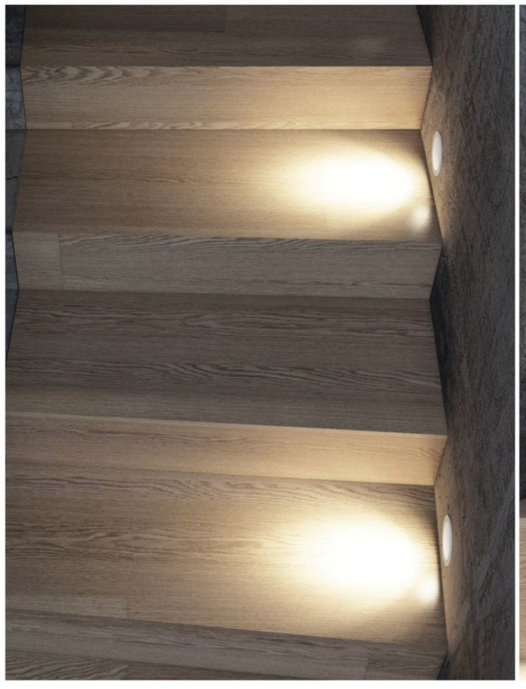

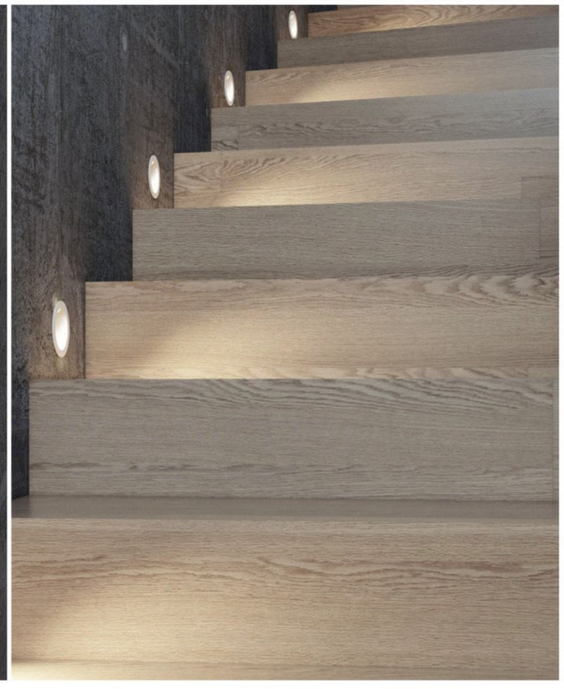

SNOW


LED POWER:2.2W
CRI: 80
SYSTEM POWER:3.8W
OUTPUT: 151Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: Ø80*30mm
HOLE SIZE: Ø70mm




ANGLE C




2.2W C 3000K



2.2W C 3000K





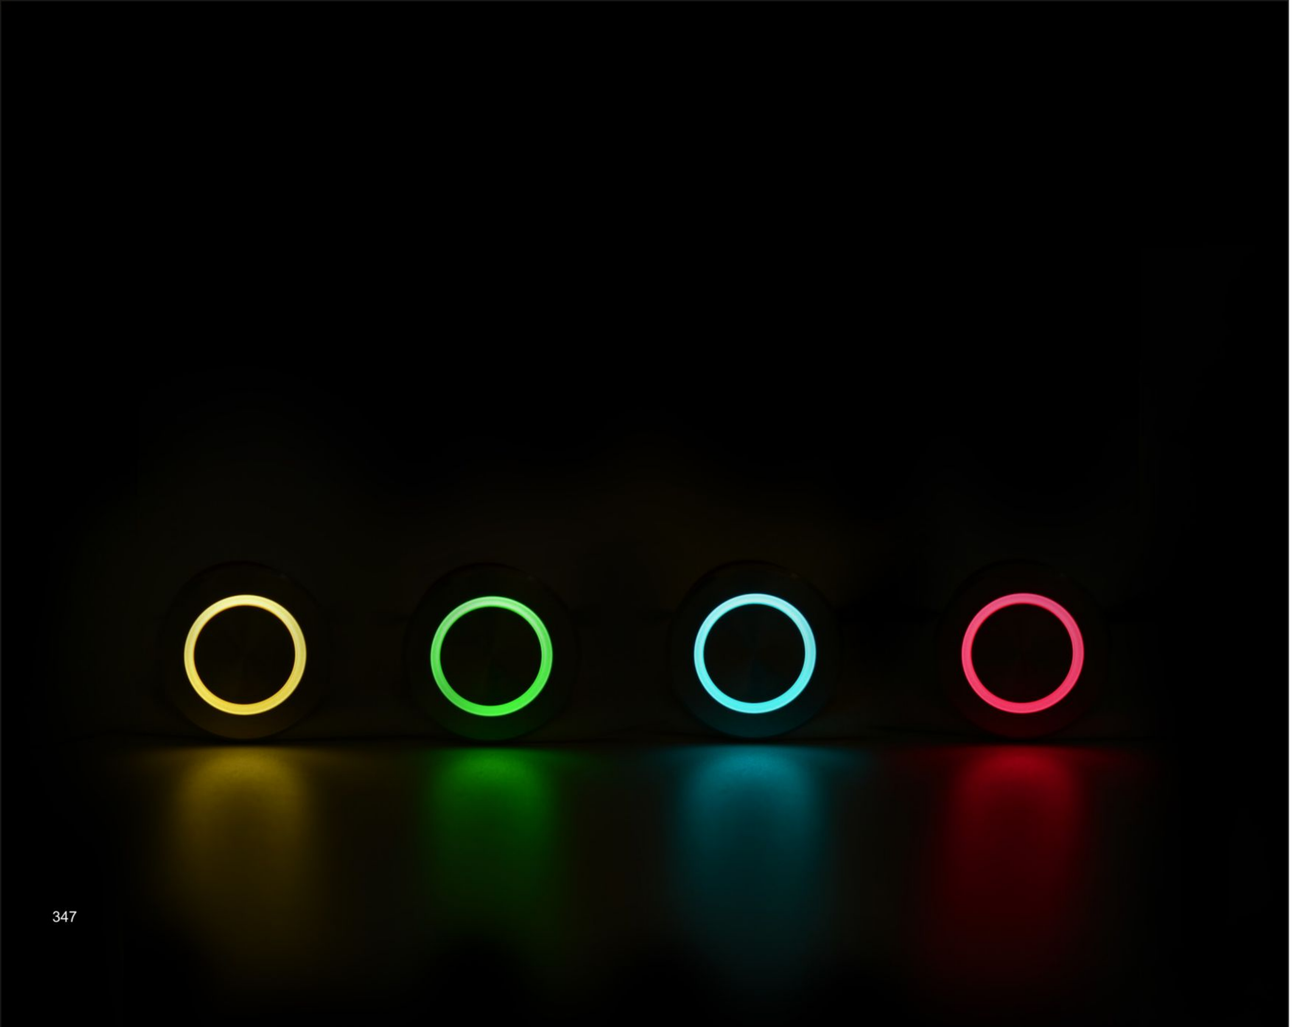

TONE

This splendid wall recessed fixture
has become the best guidance light for staircase.
Round shaped frame with elegant ring makes TONE unique and extremely popular.
Aluminum and stainless steel versions are available,
both with IP65 rate.

IP65 100-240VAC 24VAC



S LI RGB AISI316



S RO RGB AISI316



S LI RGB



S RO RGB

COLOR FINISHINGS:



SSS



PAW



PAB





S RO AISI316



S LI AISI316



S RO




S LI

COLOR FINISHINGS:




SSS PAW PAB





IN AISI316



IN

COLOR FINISHINGS:




SSS PAW PAB PCS




TONE S LI RGB AISI316 DC / S LI RGB DC S RO RGB AISI316 DC / S RO RGB DC

LED POWER: 0.7W
LED OUTPUT:/
SYSTEM POWER: 0.7W
SYSTEM OUTPUT:/
INPUT: 24VDC,50/60Hz
CRI: /
DIMENSION: Ø37*29mm
HOLE SIZE: Ø49*71mm

437917 / 437717




437817 / 437617




TONE S LI AISI316 / S LI S RO AISI316 / S RO

LED POWER: 0.9W
LED OUTPUT:/
SYSTEM POWER: 1.4W
SYSTEM OUTPUT:19Lm/3000K
INPUT: 100-240VAC,50/60Hz
CRI: 90
DIMENSION: Ø37*29mm
HOLE SIZE: Ø49*71mm

437514A / 437314A




437414A / 437214A



TONE IN AISI316 / IN

LED POWER: 1.1W
LED OUTPUT: 100Lm/3000K
SYSTEM POWER: 2.1W
SYSTEM OUTPUT: 15Lm
INPUT: 100-240VAC,50/60Hz
CRI: 80
DIMENSION: Ø50*36mm
HOLE SIZE: Ø45mm/Ø70mm


413011A / 413111A




TONE IN AISI316 DC

LED POWER: 1.1W
LED OUTPUT: 100Lm/3000K
SYSTEM POWER: 1.5W
SYSTEM OUTPUT: 15Lm
INPUT: 24VDC,50/60Hz
CRI: 80
DIMENSION: Ø50*46mm
HOLE SIZE: Ø45mm/Ø70mm

402004



TONE S LI RGB AISI316 DC / S LI RGB DC / S RO RGB AISI316 DC / S RO RGB DC

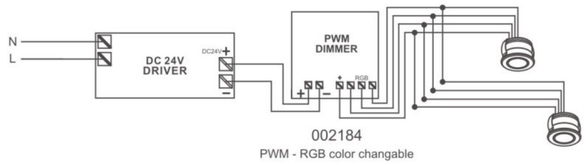

002184
PWM - RGB color changable

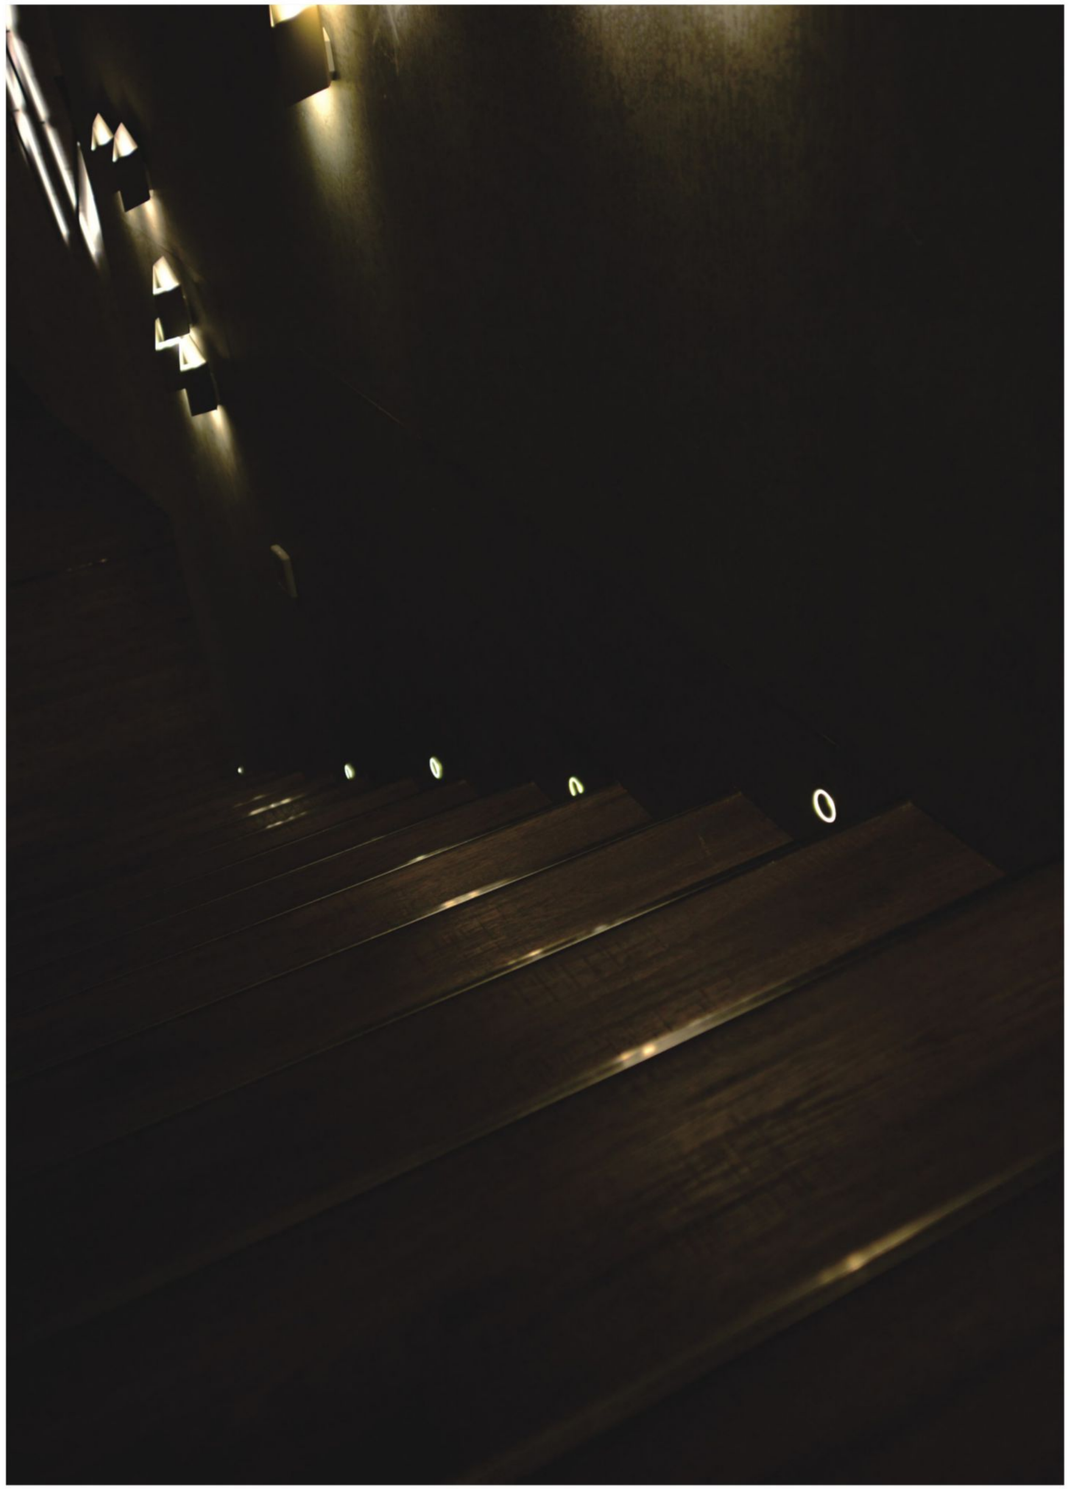


TABLE LAMP



AGARIC
355



ALFA
358



COLUMN
362



COSMOS
372




LAGO
374



SEPHORA V
374



SEPHORA H
377

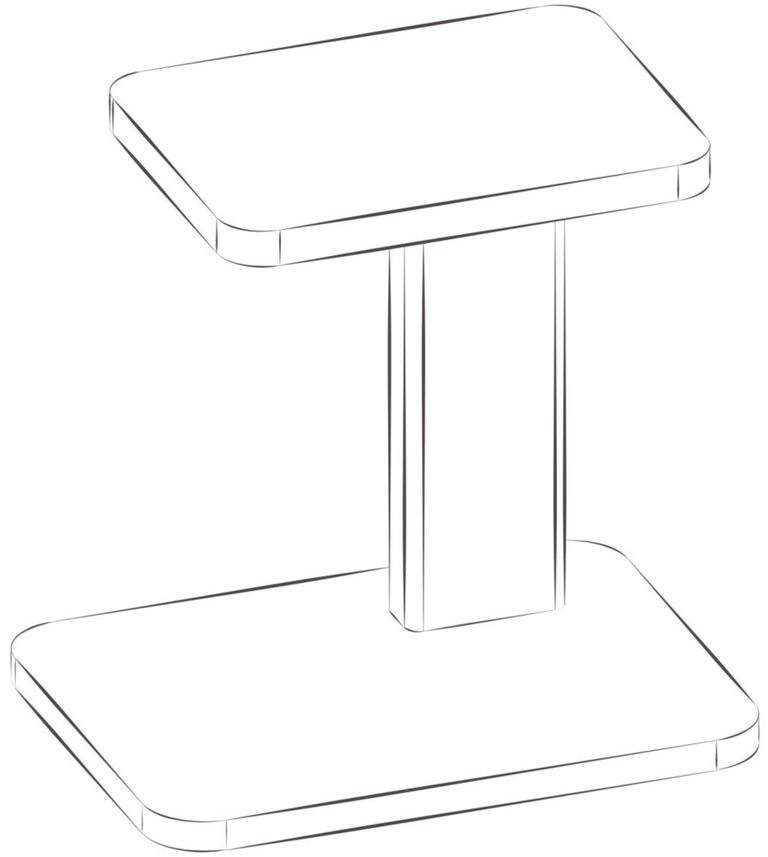

WWW.FLUA.COM

PERFORM YOUR LIGHT





AGARIC

AGARIC with its unique minimalist form can match any room design,
be it bedroom or living room.
The aureole light on the top gives perfect soft light effect.

Touch DIM can easily regulate the brightness of the lamp.

CE IP20 100-240VAC DIM TOUCH

AGARIC □

LED POWER:8.5W
CRI: 90
SYSTEM POWER:10.7W
OUTPUT: 531Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø200*214mm
HOLE SIZE: /

L

RECOMMEND

DIM TOUCH
429814DT

429814DT



COLOR FINISHINGS:

PAW PAB PCY

ALFA

ALFA collection is a unique example of minimal style and functionality. This splendid series of floor and table lamps with DIM function is the best choice for any room.

IP20 100-240VAC DIM TOUCH







T

ALFA T


LED POWER: 20.64W
CRI: 90
SYSTEM POWER: 24W
OUTPUT: 1032Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: 467*306.5*70mm
HOLE SIZE: /


L


RECOMMEND


DIM TOUCH
431914DT

431914DT







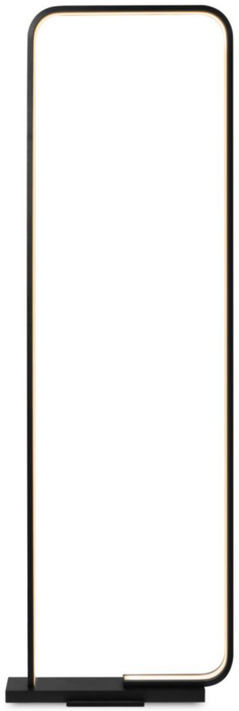



F

ALFA F □

LED POWER: 55W
CRI: 90
SYSTEM POWER: 60W
OUTPUT: 2752Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: 1351*456.5*70mm
HOLE SIZE: /


L


RECOMMEND

DIM TOUCH
432014DT

432014DT









COLUMN

COLUMN doesn't need much time to become a classic collection. Ultra thing pole with lighting disc on the top guarantees a very powerful light beam and splendid atmosphere in the room. Thanks to its unique design, COLUMN can be considered as additional decorative element, giving perfect aesthetes detail to the whole design concept.

COLUMN collection is presented by floor and table lamps that are perfectly completing each other. Thanks to special magnetic mechanism the lighting disk could be turned and light direction could be easily changed up or down. DIM function is included.

IP20 100-240VAC DIM TOUCH



T


COLUMN T

LED POWER: 15W
CRI: 90
SYSTEM POWER: 18W
OUTPUT:560Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø200*446mm
HOLE SIZE: /

L

RECOMMEND

DIM TOUCH
429114DT



COLOR FINISHINGS:

PAB PAW



F



COLUMN F

LED POWER: 26W
CRI: 90
SYSTEM POWER: 28W
OUTPUT: 1430Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø300*1780mm
HOLE SIZE: /

L


RECOMMEND

DIM TOUCH
427414DT


COLOR FINISHINGS:

PAB PAW

COLUMN T/F












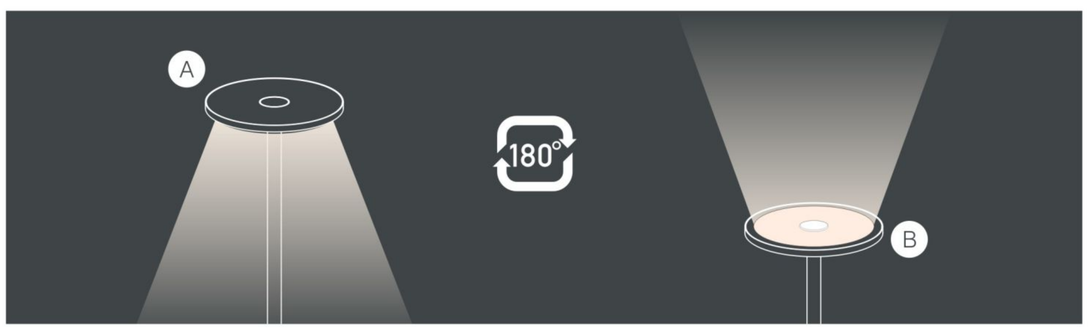



COLUMN





COLUMN



COSMOS

COSMOS is created in accordance with rules and tradition of minimalist style.
Sharp geometrical forms and simple design brings additional elegance to any room.
Unexpectedly bright colors champagne yellow and green are available.
COSMOS is the best choice for auxiliary lighting.
Touch DIM and USB charger slot are included.

IP20 100/220-240VAC DIM TOUCH USB CHARGER





COSMOS


LED POWER:6W
CRI: 90
SYSTEM POWER:8.6W
OUTPUT: 411Lm/4000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: 200*150*197mm
HOLE SIZE: /

L

RECOMMEND

DIM TOUCH
426514DT

426514DT



COLOR FINISHINGS:


PCY PGN PBK



LAGO

LAGO, with its simple minimal design, has become an ideal choice for an auxiliary lamp or reading lamp.
Special optics provides maximum light for the surface of the table.
DIM function is included.

IP20 100-240VAC DIM PUSH

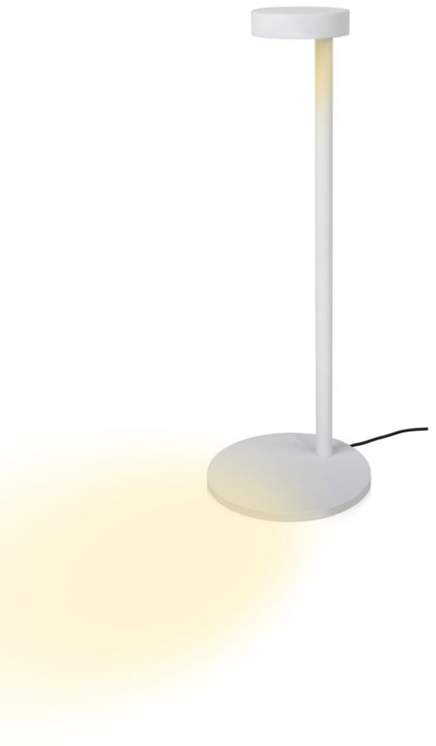

429011DT



LAGO □

LED POWER:4.4W
CRI: 90
SYSTEM POWER:5.1W
OUTPUT: 175Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø150*418mm
HOLE SIZE: /

L

RECOMMEND

DIM PUSH
429011DT


COLOR FINISHINGS:

PAB PAW

SEPHORA

SEPHORA is distinguished by its stylish appearance and
unique performance. Minimal design,
simple forms and maximum functionality are key words to describe SEPHORA.
Frosted glass globe together with DIM function provides soft
and pleasant light effect for each room.

IP20 100-240VAC DIM TOUCH

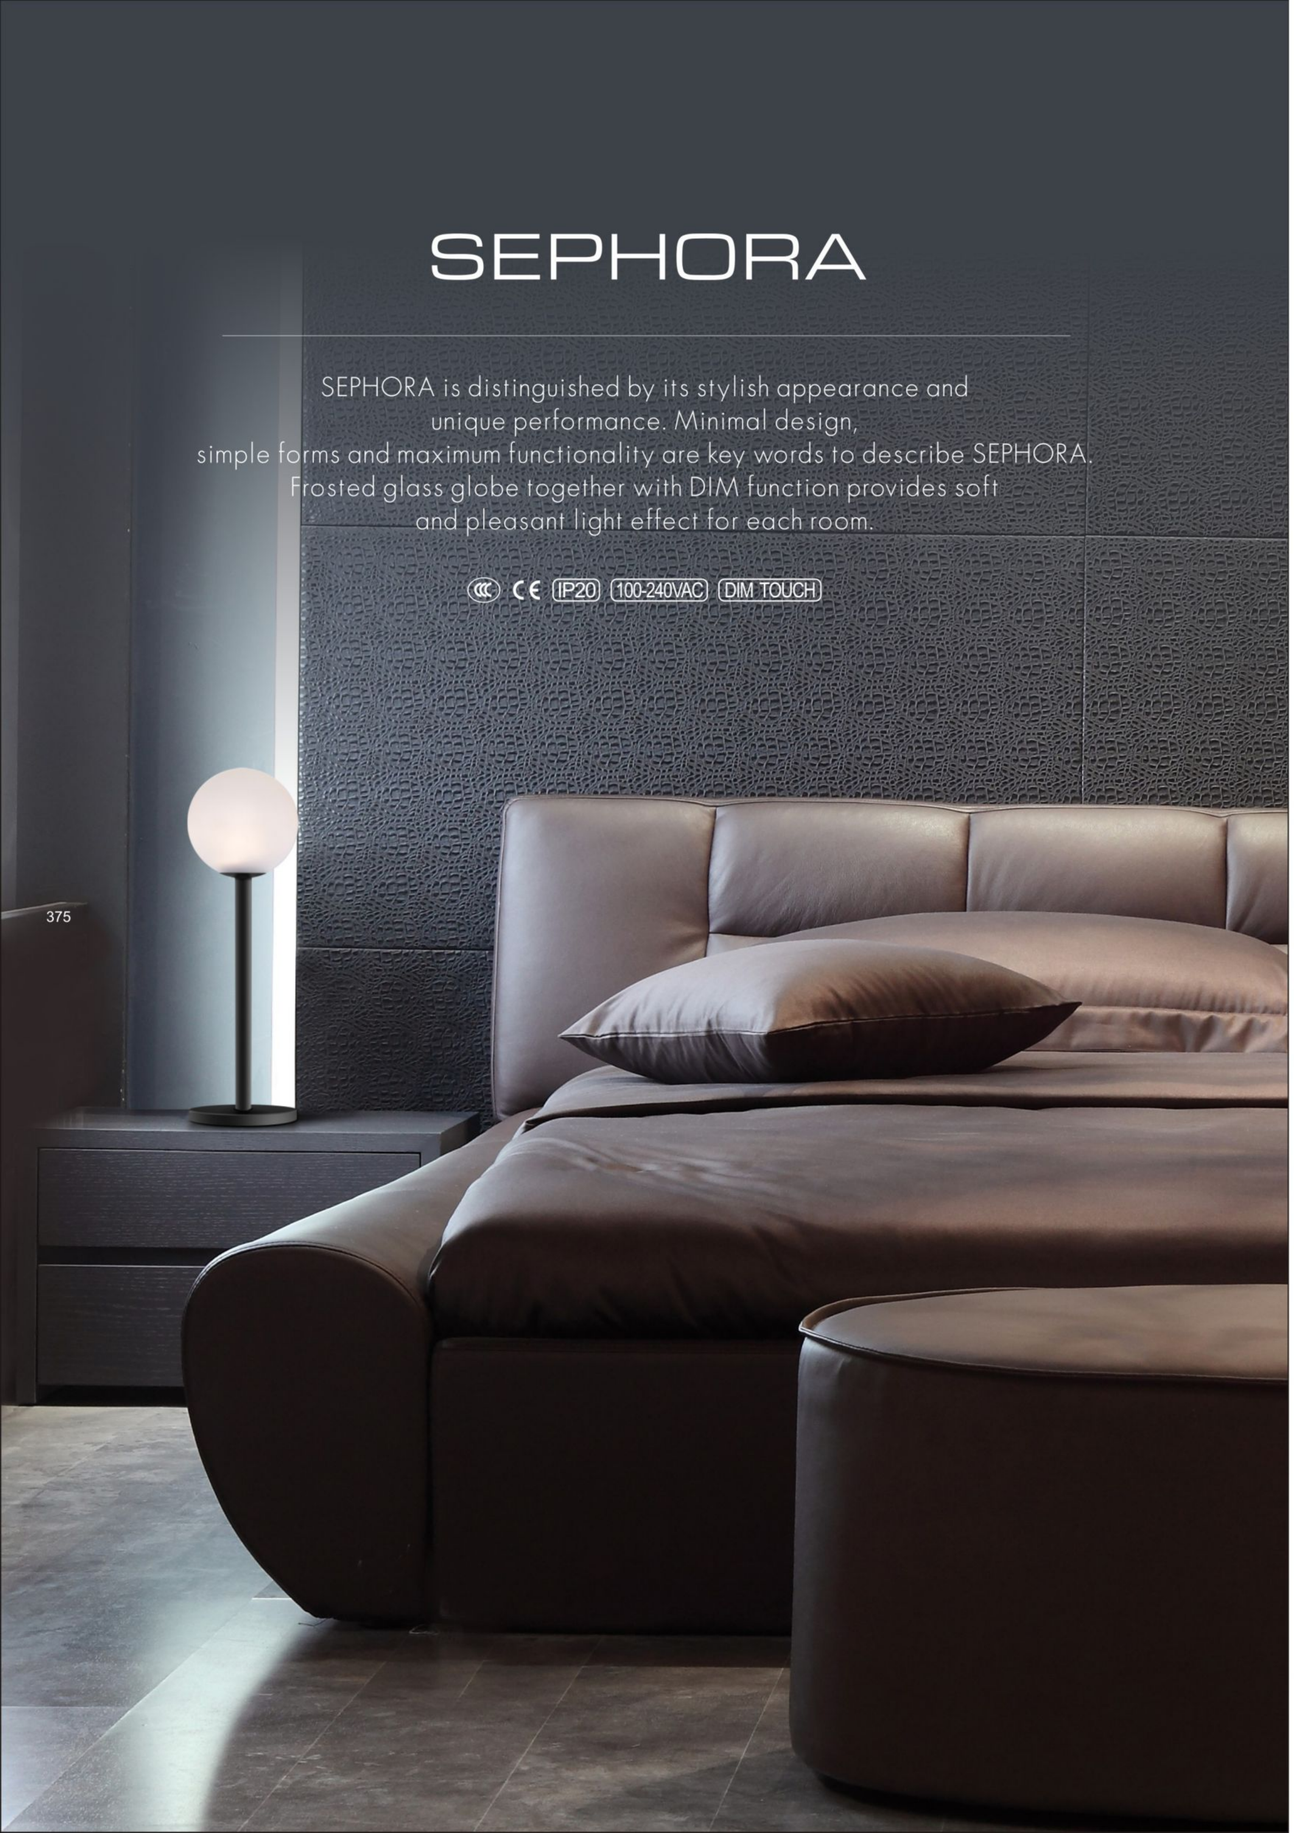



V

SEPHORA V


LED POWER:2.9W
CRI: 80
SYSTEM POWER: 4W
OUTPUT: 207Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø110*336mm
HOLE SIZE: /

L

RECOMMEND


DIM TOUCH
430014DT

430014DT



COLOR FINISHINGS:

PAB PAW

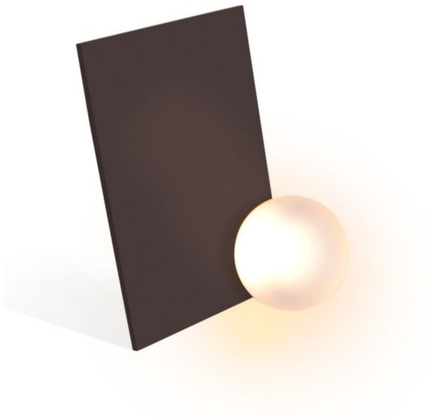


H

SEPHORA H □

LED POWER: 2.9W
CRI: 80
SYSTEM POWER: 4W
OUTPUT: 235Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: 105*259*196mm
HOLE SIZE: /

L

430114DT




RECOMMEND

DIM TOUCH
430114DT

COLOR FINISHINGS:

PAB PAW

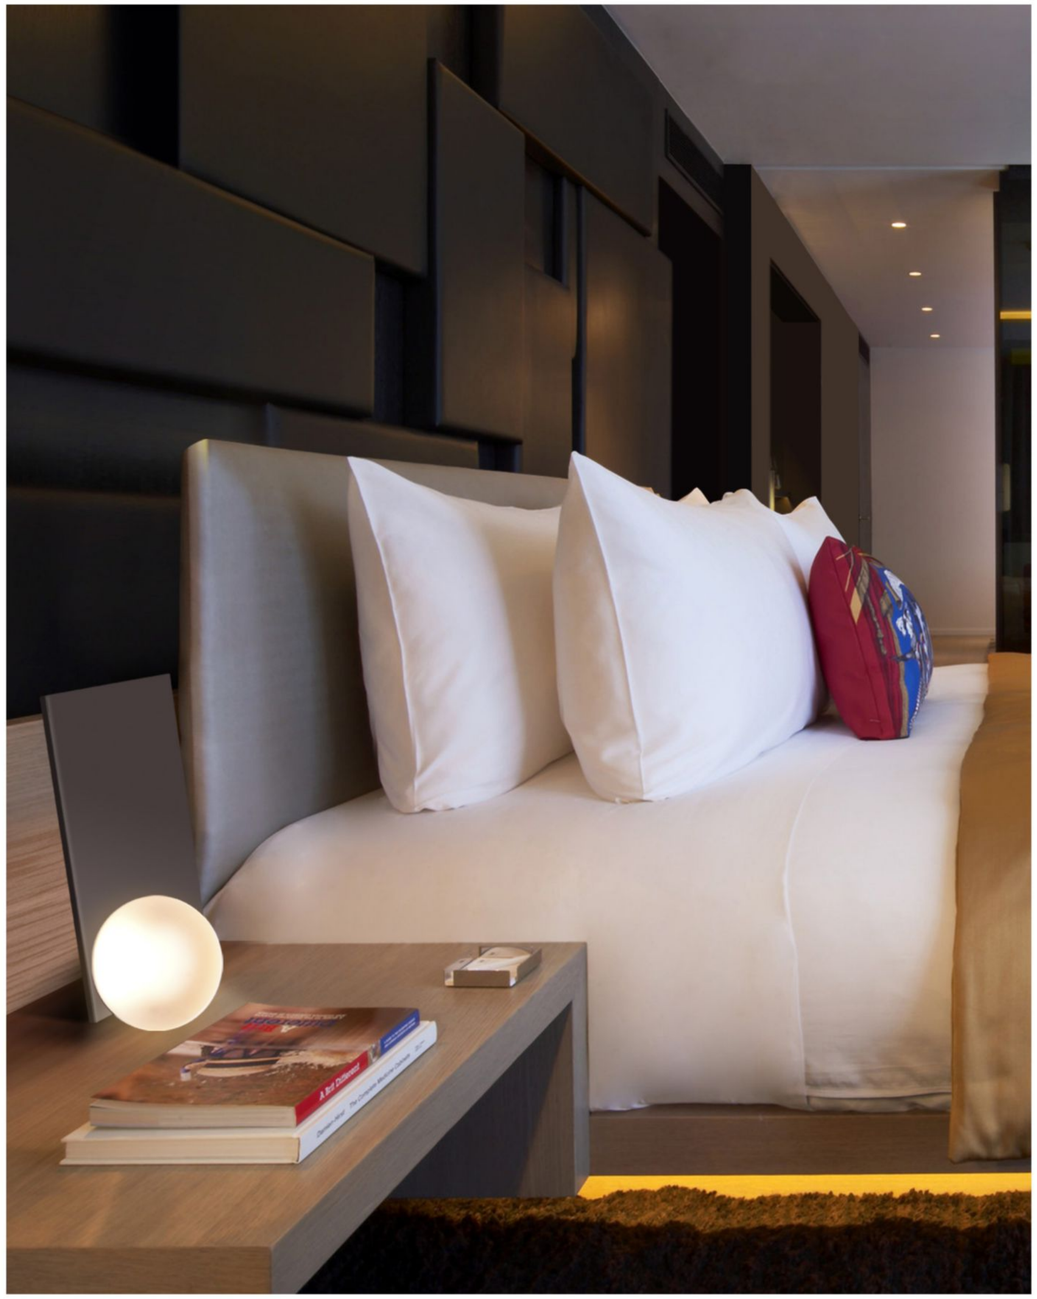

FLOOR LAMP



ATLAS
383



ALFA F
359



ANDROMEDA
386



CIDA
389



COLUMN
363



FISHING
239



HARI
392




LIRA F5G
267



LIRA F5C
267



LIRA F5
268

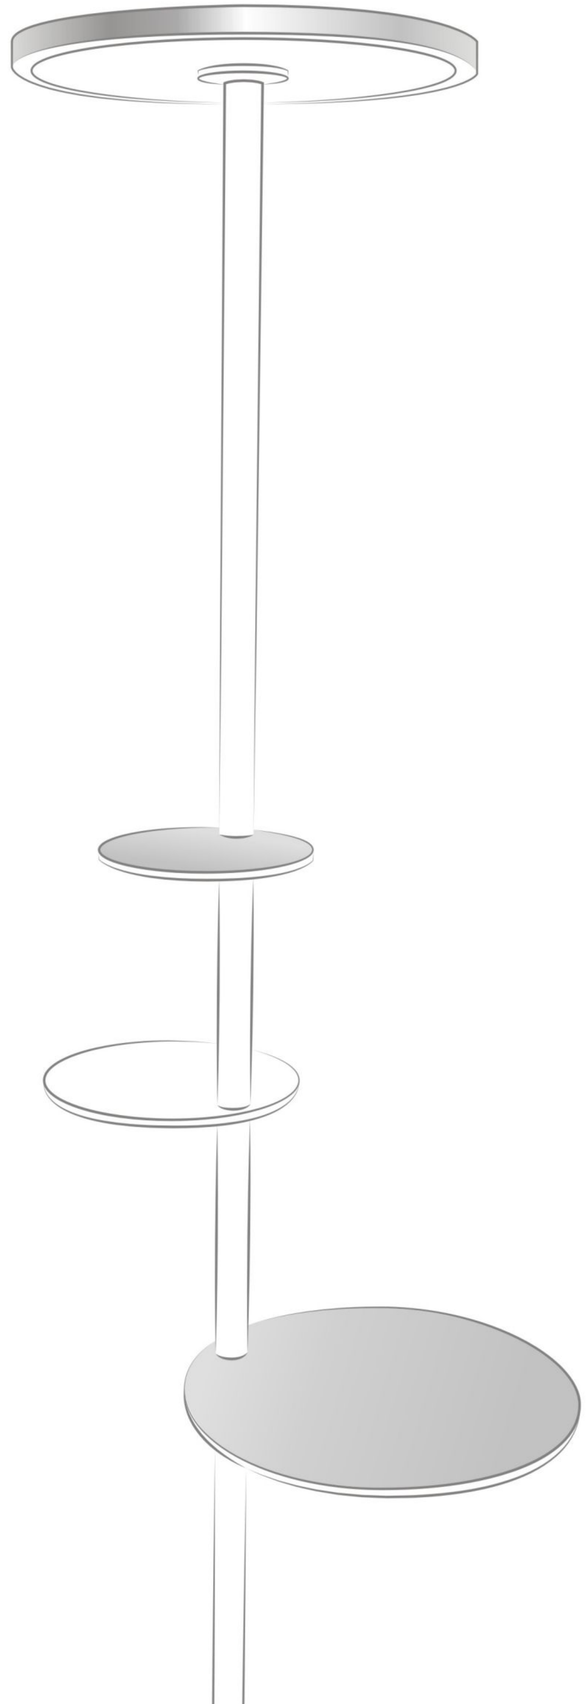

WWW.FLUA.COM

PERFORM YOUR LIGHT

ATLAS

ATLAS is a new concept idea of floor lamp
designed specially for modern office lighting.
This splendid lamp provides great lighting effect for the working area
making it comfortable for working process.
ATLAS has up and down light; down light can be dimmable with the help of push button.


IP20 220-240VAC DIM TOUCH





ATLAS

435214DT



ATLAS

LED POWER:46.9+10.18W
CRI: 90
SYSTEM POWER:67W
OUTPUT: 3173Lm/3000K
INPUT: 220-240VAC,50/60Hz
DIMENSION: 913*350*1910mm
HOLE SIZE: /


L

RECOMMEND

DIM TOUCH
435214DT

COLOR FINISHINGS:

PAB PAW

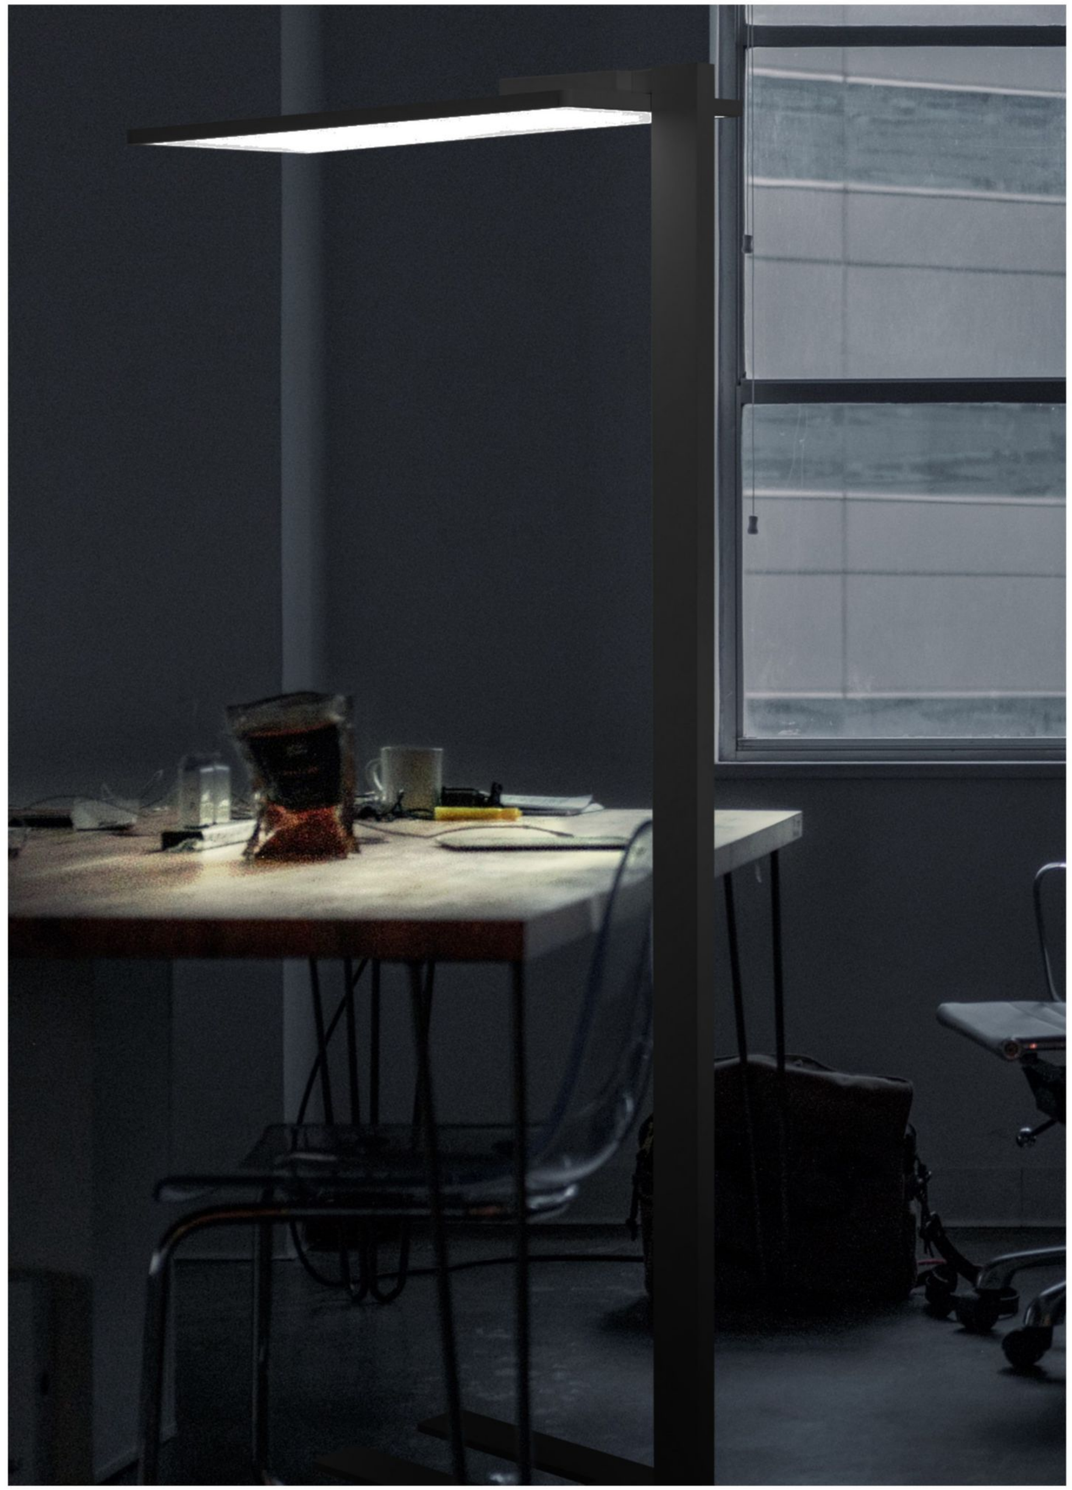


ANDROMEDA

The name of this lamp is coming from one of the most famous
and beautiful stars. ANDROMEDA has simple, but at the same time, elegant design.
The light is coming from the upper disk that could be easily changed from up
lighting to down thanks to special magnetic element.
Harmonious combination of black pole and white round
decorative elements gives additional splendid effect to the whole concept
of the lamp. DIM function is included.

IP20 100-240VAC DIM TOUCH



SHORT PRESS
ON/OFF

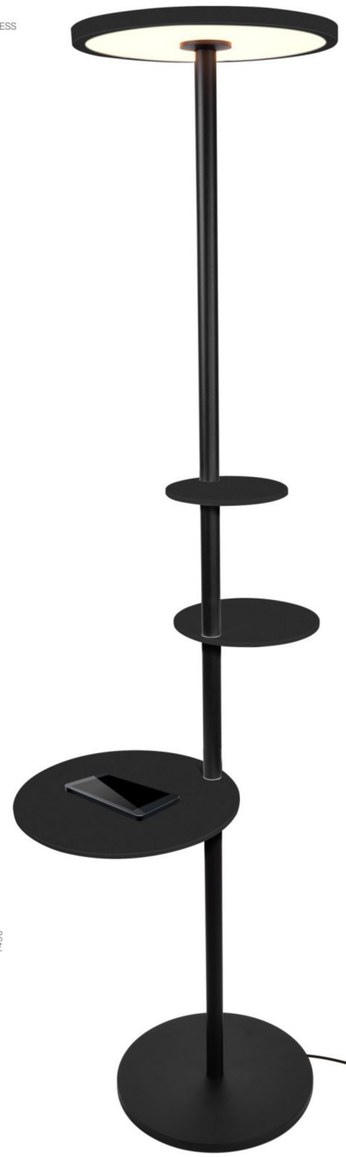

ANDROMEDA R


LED POWER:26W
CRI: 90
SYSTEM POWER:28W
OUTPUT: 1430Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø300*1450mm
HOLE SIZE: /

L

RECOMMEND

DIM TOUCH
427514

427514

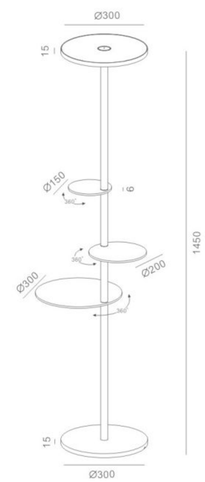


COLOR FINISHINGS:

PAB PAW

CIDA

New minimalist design concept of floor lamp, CIDA, can perfectly match any environment. With narrow beam angle, just 15°, and DIM function, CIDA has become the best choice of lamp for reading. The fitting construction makes it easy to adjust the lamp up to 90°, so the light can be focused in the necessary direction however needed.

IP20 100-240VAC DIM PUSH

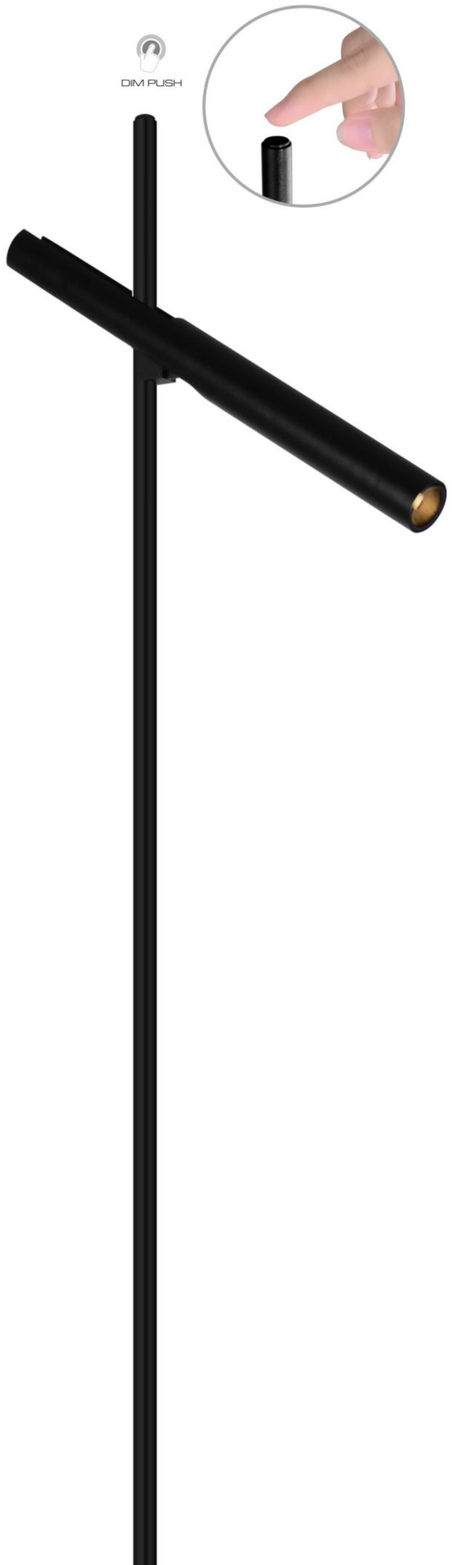






FLOOR




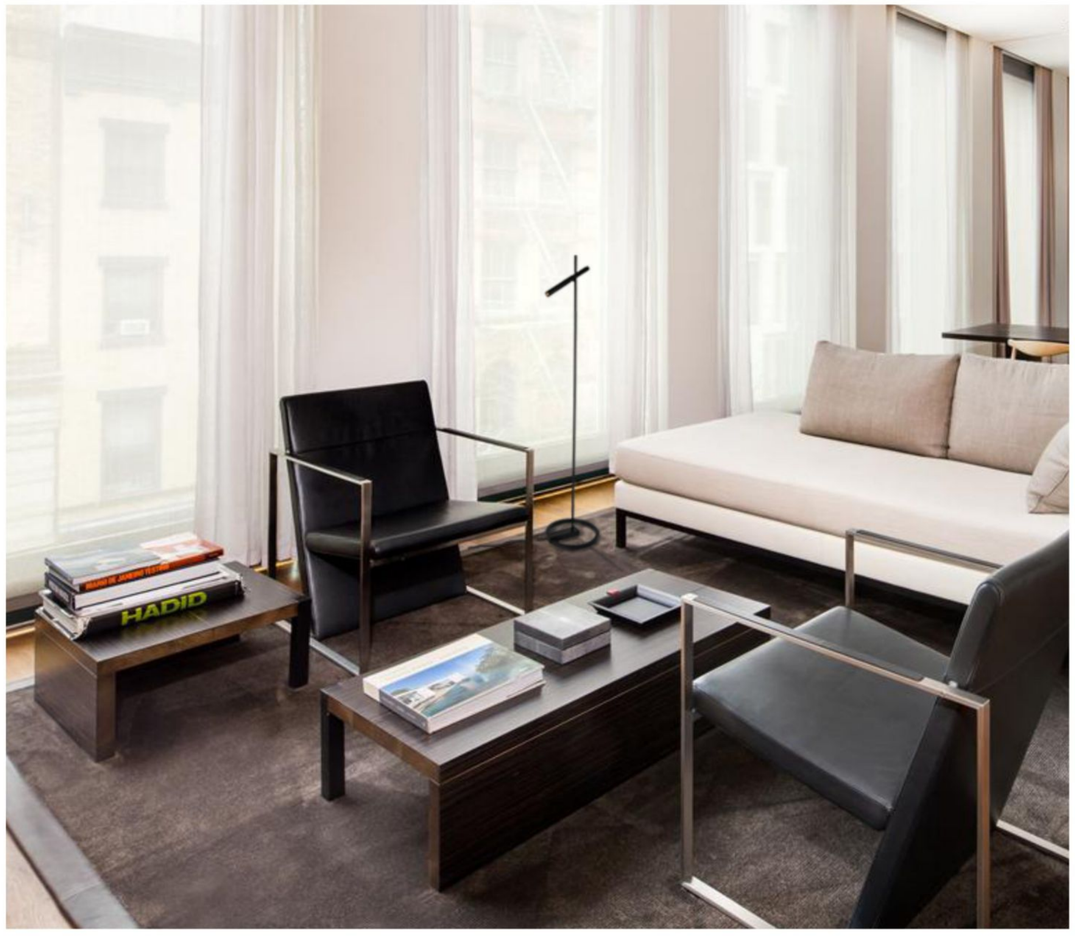


CIDA FLOOR

LED POWER: 6W
CRI: 90
SYSTEM POWER: 8.2W
OUTPUT: 413Lm/3000K
INPUT: 100-240VAC,50/60Hz
DIMENSION: Ø270*1340mm
HOLE SIZE: /


ANGLE 15°



6W 15° 3000K



6W 15° 3000K




RECOMMEND

DIM PUSH
425811DT

HARI

Sophisticated floor lamp with unique futuristic design has already
won thousands of hearts of designers.
Thanks to its touch DIM function,
it is becoming very convenient to change
the brightness of the lamp.

CE IP20 100-240VAC DIM TOUCH

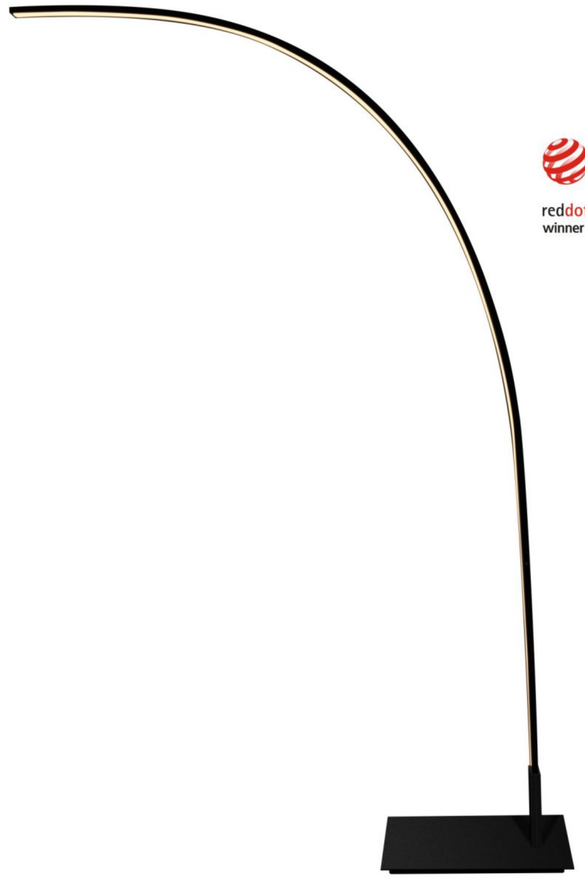

reddot design award
winner 2019



F




HARI F

LED POWER:26W
CRI: 90
SYSTEM POWER:49.3W
OUTPUT: 2107Lm/2700-5700K
INPUT: 100-240VAC,50/60Hz
DIMENSION: 2041,4*1067*230mm
HOLE SIZE: /

L

RECOMMEND

DIM TOUCH
432114DT





COLOR FINISHINGS:

PAB PAW



INTERIOR

23-61 CEILING RECESSED

73-188 CEILING SUSPENDED

191-322 WALL SURFACE

325-352 WALL RECESSED

355-378 TABLE LAMP

381-392 FLOOR LAMP


ACCESSORIES

395-404 ELECTRICAL SYSTEM

ACCESSORIES

ELECTRICAL SYSTEM

387-396

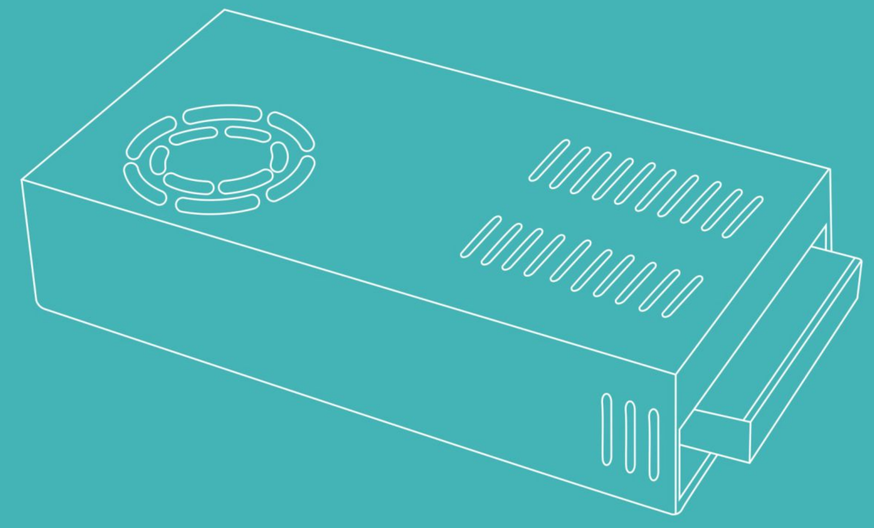

CE RoHS

Product Name	Power	Input	Output	IP	Mode No.
LRS-50-48	50W	85-264VAC	48VDC 1.1A	20	002030
LRS-75-48	75W	85-264VAC	48VDC 1.6A	20	002031
LRS-100-48	100W	85-264VAC	48VDC 2.3A	20	002032
LRS-200-48	200W	90-132VAC/180-264VAC	48VDC 4.4A	20	002034
LRS-350-48	350W	90-132VAC/180-264VAC	48VDC 7.3A	20	002035



LRS

cULus (On Request)

Product Name	Power	Input	Output	IP	Mode No.
LRS-50-24	50W	90-130VAC/180-264VAC	24VDC 2.2A	20	001017
LRS-75-24	75W	90-130VAC/180-264VAC	24VDC 3.2A	20	001660
LRS-100-24	100W	90-130VAC/180-264VAC	24VDC 4.5A	20	001623
LRS-200-24	100W	90-130VAC/180-264VAC	24VDC 8.8A	20	001624
LRS-350-24	350W	90-130VAC/180-264VAC	24VDC 14.6A	20	002538



HLG SERIES

cULus (On Request)

Product Name	Power	Input	Output	IP	Mode No.
HLG-100H-24	100W	90-264VAC	24VDC 4.0A	65	001025
HLG-150H-24	150W	90-264VAC	24VDC 6.3A	65	001026
HLG-240H-24	240W	90-264VAC	24VDC 10.0A	65	001027
HLG-320H-24	320W	90-264VAC	24VDC 13.34A	65	001028



LPV SERIES

cULus (On Request)

Product Name	Power	Input	Output	IP	Mode No.
LPV-20-24	20W	90-264VAC	24VDC 0.84A	67	001029
LPV-35-24	35W	90-264VAC	24VDC 1.5A	67	001030
LPV-60-24	60W	90-264VAC	24VDC 2.5A	67	001031
LPV-100-24	100W	90-264VAC	24VDC 4.2A	67	001032

TRIAC DIMMING PANEL



DT2-1

DRIARTE DT2-1

002237 DIM TRIAC

Dimming mode:	DIM TRIAC
Input Voltage:	90-260Vac
Control Mode:	Trailing Edge Lighting Dimmer
Max Current Load:	1Ax2CH
Max Output Power:	220W/440W(110Vac/220Vac)
Dimming Range:	5%～100%
Working Temperature:	-20°C～60°C
Package Size:	L113xW111xH57(mm)
Weight(G.W):	205g



S1-T

SKYDANCE S1-T

002072 DIM TRIAC

Dimming mode:	DIM TRIAC
Input Voltage:	100-240Vac
Control Mode:	Trailing Edge Lighting Dimmer
Max Current Load:	1.2Ax1CH
Max Output Power:	132W/264W(110Vac/220Vac)
Dimming Range:	5%～100%
Working Temperature:	-30°C～55°C
Package Size:	L113xW113xH50(mm)
Weight(G.W):	215g



D350S

AcTEC D350S

000826 DIM TRIAC

Dimming mode:	DIM TRIAC
Input Voltage:	220-240Vac
Control Mode:	Trailing Edge Lighting Dimmer
Max Current Load:	1.5Ax1CH
Max Output Power:	10-350W
Dimming Range:	5%～100%
Working Temperature:	0°C～40°C
Package Size:	L106xW106xH60(mm)
Weight(G.W):	120g

CE RoHS

1-10V DIMMING PANEL



DX3-1

DRIARTE DX3-1 002238 DIM 1-10V

Dimming mode:	DIM 1-10V
Input Voltage:	90-260Vac
Output:	0-10Vx3CH
Max Output Power:	1650W/330W(110Vac/220Vac)
Dimming Range:	0%-25%-50%-75%-100%
Working Temperature:	-20°C~60°C
Package Size:	L113xW111xH57(mm)
Weight(G.W):	209g



T18-1

SKYDANCE T18-1 002073 DIM 1-10V

Dimming mode:	DIM 1-10V
Input Voltage:	85-265Vac
Output:	0-10Vx4CH
Max Output Power:	/
Dimming Range:	0.1%~100%
Working Temperature:	-30°C~55°C
Package Size:	L113xW113xH50(mm)
Weight(G.W):	245g

PWM DIMMING PANEL



T2-1

SKYDANCE T2-1 002071 DIM COLOR RF-2.4

Dimming mode:	PWM
Input Voltage:	12~24Vdc
Max Current Load:	3Ax4CH Max 12A
Max Load Power:	144W/288W(12Vdc/24Vdc)
Control Mode:	PWM Color Temperature(RF2.4G)
Working Temperature:	-30°C~55°C
Package Size:	L113xW113xH50(mm)
Weight(G.W):	230g



T3-1

SKYDANCE T3-1 002184 DIM RGB RF-2.4

Dimming mode:	PWM
Input Voltage:	12~24Vdc
Max Current Load:	4Ax3CH Max 12A
Max Load Power:	144W/288W(12Vdc/24Vdc)
Control Mode:	PWM RGB (RF2.4G)
Working Temperature:	-30°C~55°C
Package Size:	L113xW113xH50(mm)
Weight(G.W):	230g

DMX DIMMING PANEL



T12-1

SKYDANCE T12-1 002183 DIM COLOR DMX RF-2.4

Dimming mode:	DMX
Input Voltage:	85-265Vac
Max Current Load:	/
Max Load Power:	/
Control Mode:	DMX512 Color Temperature(RF2.4G)
Working Temperature:	-30°C~55°C
Package Size:	L113xW113xH50(mm)
Weight(G.W):	245g



T14-1

SKYDANCE T14-1 002302 DIM RGBW DMX RF-2.4

Dimming mode:	DMX
Input Voltage:	85-265Vac
Max Current Load:	/
Max Load Power:	/
Control Mode:	DMX512 RGBW(RF2.4G)
Working Temperature:	-30°C~55°C
Package Size:	L113xW113xH50(mm)
Weight(G.W):	245g

CE RoHS

RGB CONTROLLER



LT-3600RF

LTECH LT-3600RF 001034

Input Voltage:	12~24Vdc
Max Current Load:	6Ax3CH Max 18A
Max Output Power:	216W/432W(12Vdc/24Vdc)
Function Mode:	16Modes
Control Button:	8 Press Button
RF Remote Distance:	100m
Working Temperature:	-30°C~55°C
Package Size:	L313xW50xH32(mm)
Weight(G.W):	240g



LT-8030

LTECH LT-8030 000151

Input Voltage:	5~24Vdc
Input Signal:	DMX512
DMX512 Socket:	XLR-3,Green Terminal
Max Current Load:	4Ax3CH Max 12A
Max Output Power:	60W/144W/288W(5Vdc/12Vdc/24Vdc)
Dimming Range	0~100%
Working Temperature:	-30°C~55°C
Package Size:	L135xW70xH50(mm)
Weight(G.W):	305g



LT-3060

LTECH LT-3060 001039

Input Voltage:	5~24Vdc
Input Signal:	PWM
Max Current Load:	5Ax3CH Max 15A
Max Output Power:	75W/180W/360W(5Vdc/12Vdc/24Vdc)
Working Temperature:	-30°C~55°C
Package Size:	L123xW42xH42(mm)
Weight(G.W):	100g




LT-870

LTECH LT-870 001035


Input Voltage:	5~24Vdc
Input/Output Signal:	DMX512
Working Frequency Channel:	2.4GHz ISM 64Channels
Max Transmitted Power:	20dBm
Receiver Sensitvity:	-96dBm
Communication Distance:	350m
Working Temperature:	-30°C~55°C
Package Size:	L178xW56xH31(mm)
Weight(G.W):	125g

CONNECTION


NORMAL CONNECTION

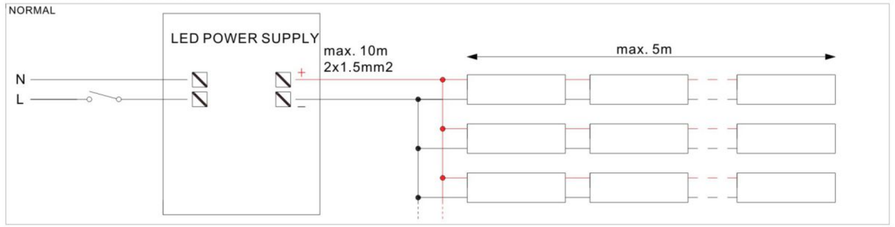


TRIAC DIMMING CONNECTION

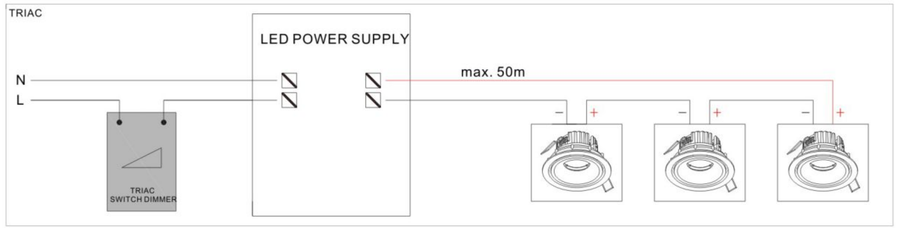


1-10V DIMMING CONNECTION

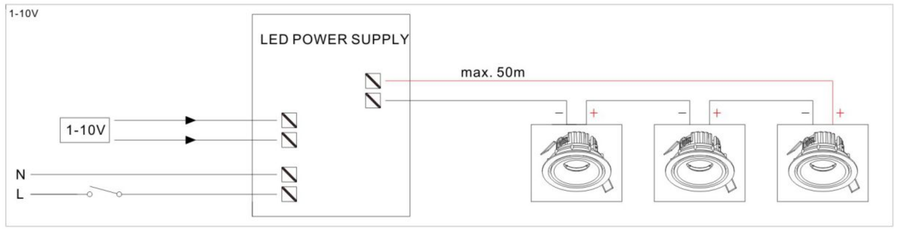


DALI DIMMING CONNECTION

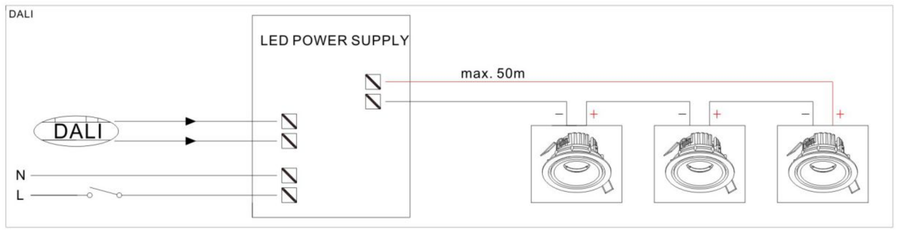


PUSH DIMMING CONNECTION

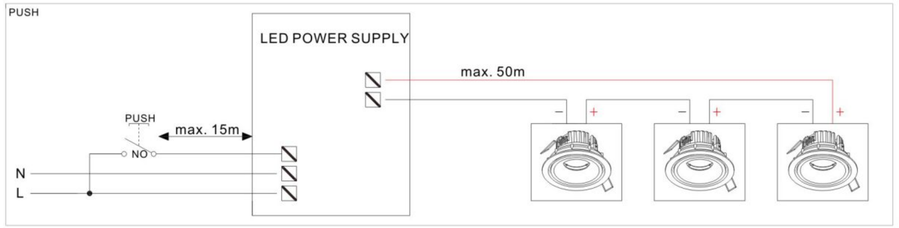

PWM DIMMING CONNECTION

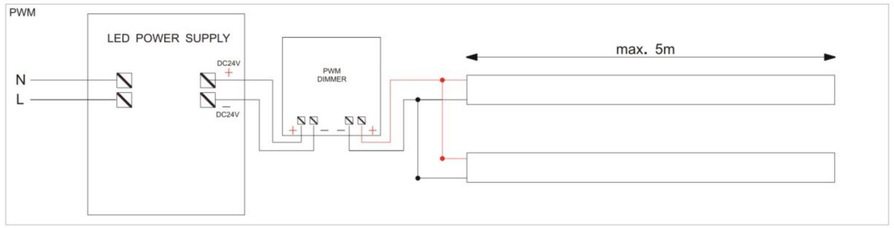

NORMAL RGB CONNECTION

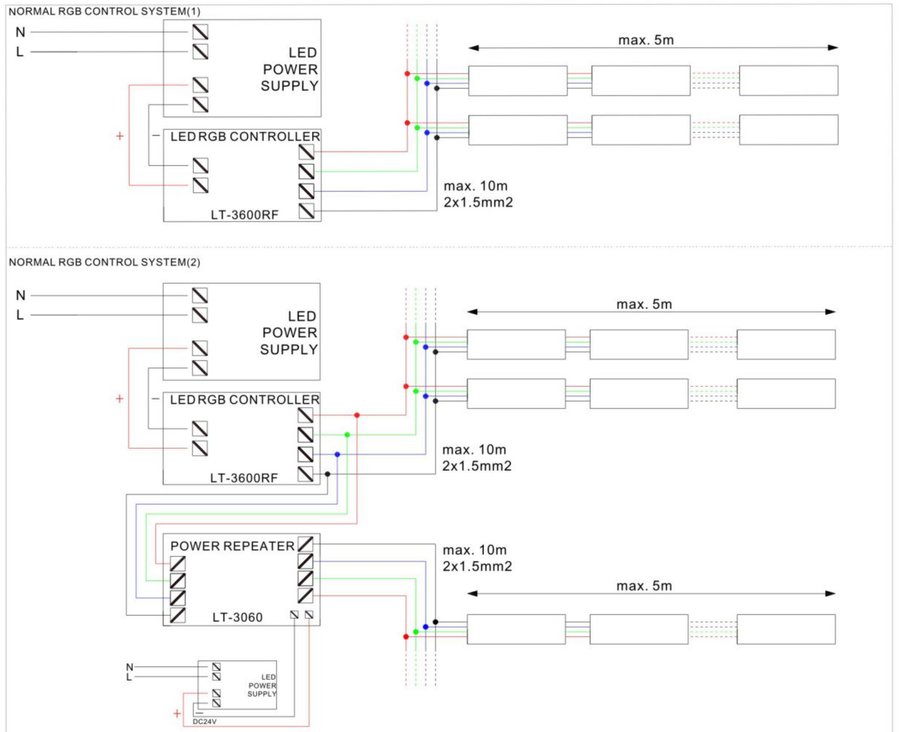

ZIGBEE CONTROL SYSTEM



FLUA SMART PANEL 001272

Input Voltage:	85～250Vac
Max Current Load:	1.25Ax4CH Max 5A/2.5Ax4CH Max 10A
Max Load Power:	550W/220W(110Vac/220Vac)
Working Frequency Channel:	2.4 G Zigbee
Working Temperature:	-30°C～55°C
Package Size:	L110xW94xH50(mm)
Weight(G.W):	246g

NETWORK GATEWAY



NETWORK GATEWAY 001284

Input Voltage:	100～240Vac
Working Frequency Channel:	2.4 G Zigbee 200Channels
Network port standards：	IEEE802
Working Temperature:	-20°C～70°C
Package Size:	L268xW165xH52(mm)
Weight(G.W):	456g

NETWORK CONTROL SYSTEM

